

Coaxial

Power Splitter/Combiner

ZFSC-2-372-S+

2 Way-0° 50Ω 10 to 3700 MHz

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	3
PORT 1	1
PORT 2	2

Outline Drawing

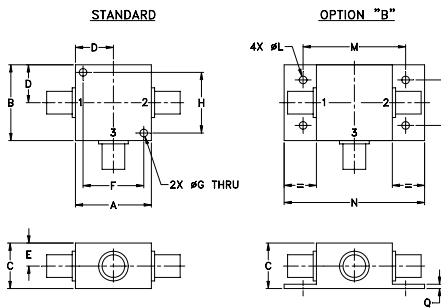

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
1.25	1.25	.75	.63	.38	1.00	.125	1.000
31.75	31.75	19.05	16.00	9.65	25.40	3.18	25.40
J	K	L	M	N	P	Q	wt
--	--	.125	1.688	2.18	.75	.07	grams
--	--	3.18	42.88	55.37	19.05	1.78	70.0

Features

- very wideband, 10 to 3700 MHz
- low insertion loss, 0.6 dB typ.
- excellent amplitude unbalance, 0.2 dB typ.
- excellent phase unbalance, 1.0 deg. typ.
- rugged shielded case

Applications

- cellular
- GPS
- PCS/DCS
- ISM
- satellite distribution
- MMDS
- defense communications



CASE STYLE: K18

Connectors	Model
SMA	ZFSC-2-372-S+
BRACKET (OPTION "B")	

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 3.0 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)								
	L	M	U	L	M	U	L	M	U	L	M	U						
10-3700	18	13	18	14	20	14	0.5	0.8	0.6	1.1	0.8	1.6	1	4	6	0.2	0.3	0.4
2400-3300			25	17			0.6	1.3				5					0.3	

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
10.00	3.53	3.53	0.00	18.72	0.00	1.99	1.56	1.56
100.00	3.55	3.55	0.00	18.75	0.01	1.98	1.56	1.56
400.00	3.54	3.54	0.01	18.97	0.00	1.91	1.54	1.54
700.00	3.49	3.48	0.01	18.79	0.00	1.78	1.47	1.47
1200.00	3.39	3.37	0.02	18.71	0.02	1.53	1.32	1.32
1600.00	3.36	3.33	0.03	18.63	0.02	1.35	1.21	1.21
2000.00	3.41	3.34	0.06	18.96	0.01	1.28	1.12	1.12
2400.00	3.52	3.42	0.10	20.75	0.10	1.32	1.06	1.06
2600.00	3.59	3.48	0.11	23.20	0.22	1.37	1.06	1.09
3000.00	3.75	3.63	0.12	32.34	0.61	1.45	1.21	1.27
3150.00	3.81	3.69	0.12	26.87	0.72	1.47	1.29	1.36
3350.00	3.90	3.80	0.10	21.86	0.84	1.51	1.41	1.49
3500.00	3.97	3.88	0.10	19.61	0.82	1.55	1.51	1.59
3600.00	4.04	3.93	0.11	18.46	0.71	1.58	1.57	1.65
3700.00	4.10	4.00	0.11	17.55	0.54	1.61	1.63	1.70

1. Total Loss = Insertion Loss + 3dB splitter loss.

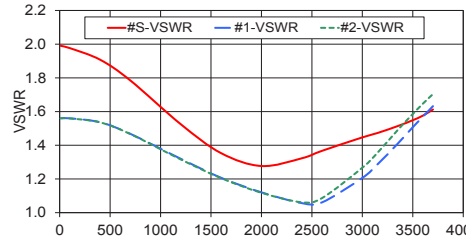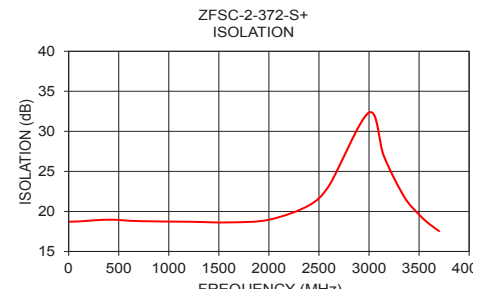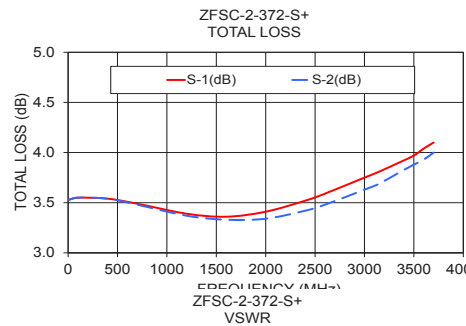

electrical schematic



Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View ZFSC-2-372-S+ on WIN SOURCE](#)

 [Mini-Circuits Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management