



**THE DATASHEET OF  
HEF4094BP,652**



# HEF4094B

## 8-stage shift-and-store register

Rev. 15 — 5 September 2024

Product data sheet

### 1. General description

The HEF4094B is an 8-bit serial-in/serial or parallel-out shift register with a storage register and 3-state outputs. Both the shift and storage register have separate clocks. The device features a serial input (D) and two serial outputs (QS1 and QS2) to enable cascading. Data is shifted on the LOW-to-HIGH transitions of the CP input. Data is available at QS1 on the LOW-to-HIGH transitions of the CP input to allow cascading when clock edges are fast. The same data is available at QS2 on the next HIGH-to-LOW transition of the CP input to allow cascading when clock edges are slow. The data in the shift register is transferred to the storage register when the STR input is HIGH. Data in the storage register appears at the outputs whenever the output enable input (OE) is HIGH. A LOW on OE causes the outputs to assume a high-impedance OFF-state. Operation of the OE input does not affect the state of the registers. Inputs include clamp diodes. This enables the use of current limiting resistors to interface inputs to voltages in excess of  $V_{DD}$ .

### 2. Features and benefits

- Fully static operation
- 5 V, 10 V, and 15 V parametric ratings
- Wide supply voltage range from 3.0 V to 15.0 V
- CMOS low power dissipation
- High noise immunity
- Standardized symmetrical output characteristics
- Complies with JEDEC standard JESD 13-B
- ESD protection:
  - HBM: ANSI/ESDA/JEDEC JS-001 class 2 exceeds 2000 V
  - CDM: ANSI/ESDA/JEDEC JS-002 class C3 exceeds 1000 V
- Specified from -40 °C to +85 °C and -40 °C to +125 °C

### 3. Ordering information

**Table 1. Ordering information**

All types operate from -40 °C to +125 °C.

| Type number                | Package |  | Version                  |
|----------------------------|---------|--|--------------------------|
|                            | Name    | Description  |                          |
| <a href="#">HEF4094BT</a>  | SO16    | plastic small outline package; 16 leads; body width 3.9 mm             | <a href="#">SOT109-1</a> |
| <a href="#">HEF4094BTT</a> | TSSOP16 | plastic thin shrink small outline package; 16 leads; body width 4.4 mm | <a href="#">SOT403-1</a> |

### 4. Functional diagram

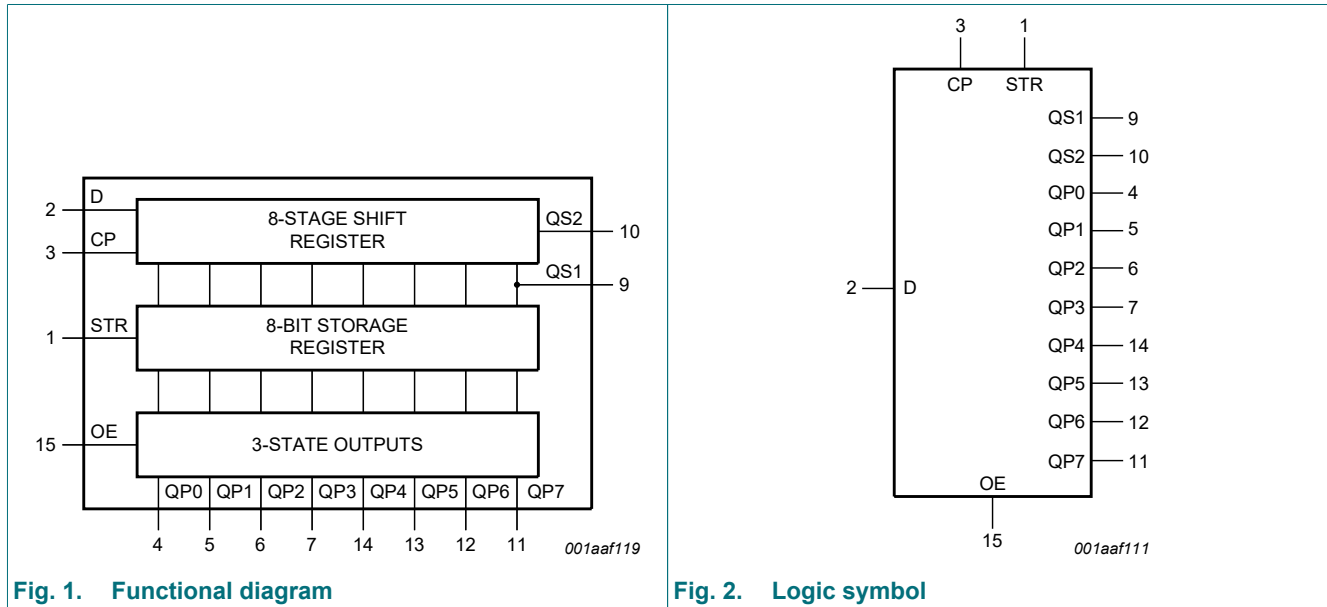


Fig. 1. Functional diagram

Fig. 2. Logic symbol

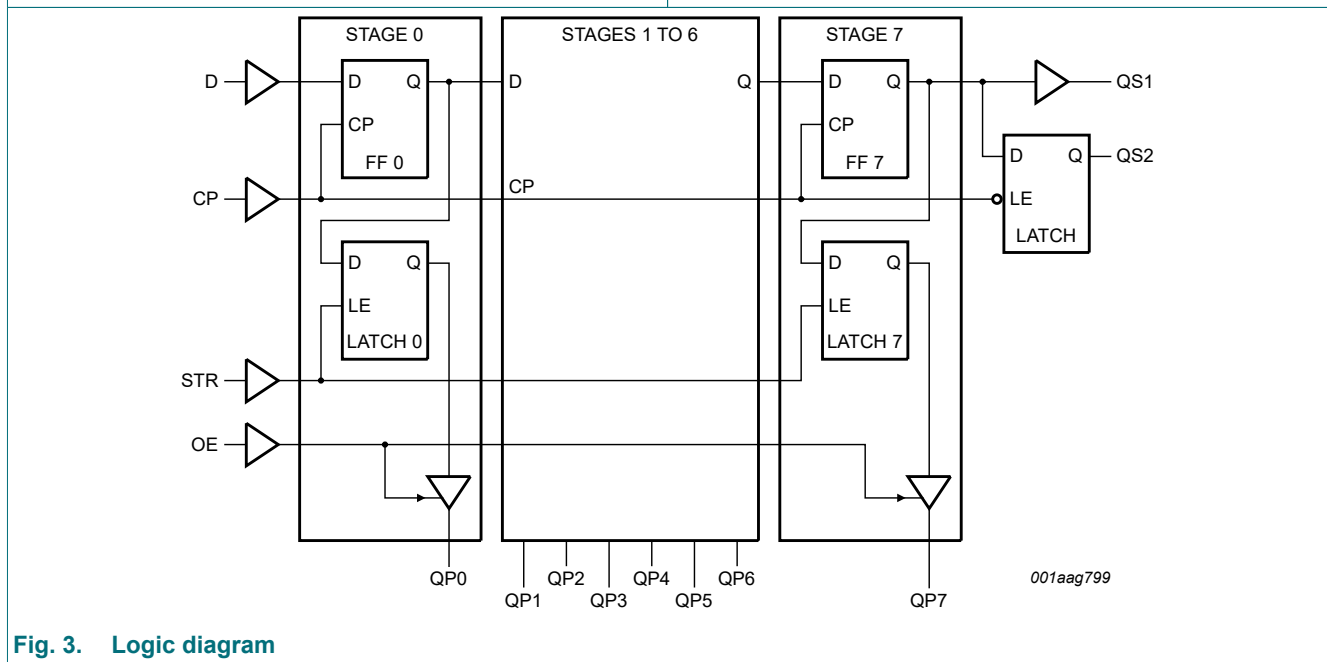


Fig. 3. Logic diagram

## 5. Pinning information

### 5.1. Pinning

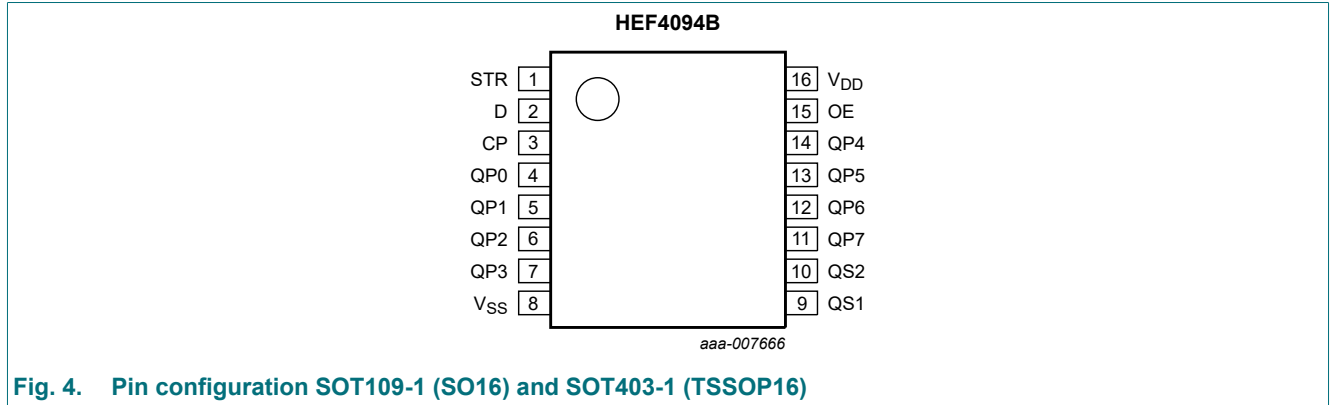


Fig. 4. Pin configuration SOT109-1 (SO16) and SOT403-1 (TSSOP16)

### 5.2. Pin description

Table 2. Pin description


| Symbol          | Pin                        | Description           |
|-----------------|----------------------------|-----------------------|
| STR             | 1                          | strobe input          |
| D               | 2                          | data input            |
| CP              | 3                          | clock input           |
| QP0 to QP7      | 4, 5, 6, 7, 14, 13, 12, 11 | parallel output       |
| V <sub>SS</sub> | 8                          | ground supply voltage |
| QS1             | 9                          | serial output         |
| QS2             | 10                         | serial output         |
| OE              | 15                         | output enable input   |
| V <sub>DD</sub> | 16                         | supply voltage        |

## 6. Functional description

**Table 3. Function table**

H = HIGH voltage level; L = LOW voltage level; X = don't care; Z = HIGH-impedance OFF-state; NC = no change;  
 ↑ = positive-going transition; ↓ = negative-going transition;  
 Q6S = the data in register stage 6 before the LOW to HIGH clock transition;  
 Q7S = the data in register stage 7 before the HIGH to LOW clock transition.

| Inputs |    |     |   | Parallel outputs |         | Serial outputs |     |
|--------|----|-----|---|------------------|---------|----------------|-----|
| CP     | OE | STR | D | QP0              | QPn     | QS1            | QS2 |
| ↑      | L  | X   | X | Z                | Z       | Q6S            | NC  |
| ↓      | L  | X   | X | Z                | Z       | NC             | Q7S |
| ↑      | H  | L   | X | NC               | NC      | Q6S            | NC  |
| ↑      | H  | H   | L | L                | QPn - 1 | Q6S            | NC  |
| ↑      | H  | H   | H | H                | QPn - 1 | Q6S            | NC  |
| ↓      | H  | H   | H | NC               | NC      | NC             | Q7S |

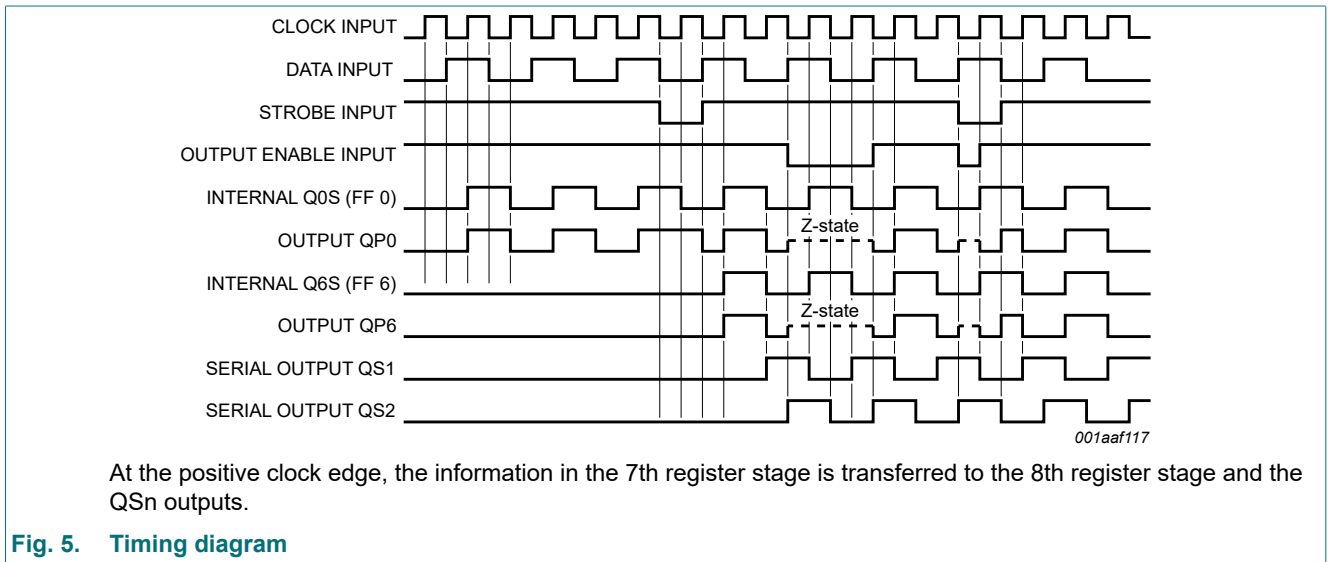

**Fig. 5. Timing diagram**

## 7. Limiting values

**Table 4. Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to  $V_{SS} = 0\text{ V}$  (ground).

| Symbol    | Parameter               | Conditions   | Min  | Max            | Unit |
|-----------|-------------------------|--|------|----------------|------|
| $V_{DD}$  | supply voltage          |  | -0.5 | +18            | V    |
| $I_{IK}$  | input clamping current  | $V_I < -0.5\text{ V}$ or $V_I > V_{DD} + 0.5\text{ V}$ | -    | $\pm 10$       | mA   |
| $V_I$     | input voltage           |  | -0.5 | $V_{DD} + 0.5$ | V    |
| $I_{OK}$  | output clamping current | $V_O < -0.5\text{ V}$ or $V_O > V_{DD} + 0.5\text{ V}$ | -    | $\pm 10$       | mA   |
| $I_{I/O}$ | input/output current    |  | -    | $\pm 10$       | mA   |
| $I_{DD}$  | supply current          |  | -    | 50             | mA   |
| $T_{stg}$ | storage temperature     |  | -65  | +150           | °C   |
| $T_{amb}$ | ambient temperature     |  | -40  | +125           | °C   |
| $P_{tot}$ | total power dissipation | [1]  | -    | 500            | mW   |
| $P$       | power dissipation       | per output   | -    | 100            | mW   |

- [1] For SOT109-1 (SO16) package:  $P_{tot}$  derates linearly with 12.4 mW/K above 110 °C.  
For SOT403-1 (TSSOP16) package:  $P_{tot}$  derates linearly with 8.5 mW/K above 91 °C.

## 8. Recommended operating conditions

**Table 5. Recommended operating conditions**

| Symbol              | Parameter                           | Conditions             | Min | Typ | Max      | Unit            |
|---------------------|-------------------------------------|------------------------|-----|-----|----------|-----------------|
| $V_{DD}$            | supply voltage                      |                        | 3   | -   | 15       | V               |
| $V_I$               | input voltage                       |                        | 0   | -   | $V_{DD}$ | V               |
| $T_{amb}$           | ambient temperature                 | in free air            | -40 | -   | +125     | °C              |
| $\Delta t/\Delta V$ | input transition rise and fall rate | $V_{DD} = 5\text{ V}$  | -   | -   | 3.75     | $\mu\text{s/V}$ |
|                     |                                     | $V_{DD} = 10\text{ V}$ | -   | -   | 0.5      | $\mu\text{s/V}$ |
|                     |                                     | $V_{DD} = 15\text{ V}$ | -   | -   | 0.08     | $\mu\text{s/V}$ |

## 9. Static characteristics

**Table 6. Static characteristics**

$V_{SS} = 0\text{ V}$ ;  $V_I = V_{SS}$  or  $V_{DD}$ ; unless otherwise specified.

| Symbol          | Parameter                 | Conditions   | V <sub>DD</sub> | T <sub>amb</sub> = -40 °C |       | T <sub>amb</sub> = +25 °C |      | T <sub>amb</sub> = +85 °C |       | T <sub>amb</sub> = +125 °C |       | Unit |
|-----------------|---------------------------|--|-----------------|---------------------------|-------|---------------------------|------|---------------------------|-------|----------------------------|-------|------|
|                 |                           |  |                 | Min                       | Max   | Min                       | Max  | Min                       | Max   | Min                        | Max   |      |
| V <sub>IH</sub> | HIGH-level input voltage  | I <sub>O</sub>   < 1 μA                            | 5 V             | 3.5                       | -     | 3.5                       | -    | 3.5                       | -     | 3.5                        | -     | V    |
|                 |                           |  | 10 V            | 7.0                       | -     | 7.0                       | -    | 7.0                       | -     | 7.0                        | -     | V    |
|                 |                           |  | 15 V            | 11.0                      | -     | 11.0                      | -    | 11.0                      | -     | 11.0                       | -     | V    |
| V <sub>IL</sub> | LOW-level input voltage   | I <sub>O</sub>   < 1 μA                            | 5 V             | -                         | 1.5   | -                         | 1.5  | -                         | 1.5   | -                          | 1.5   | V    |
|                 |                           |  | 10 V            | -                         | 3.0   | -                         | 3.0  | -                         | 3.0   | -                          | 3.0   | V    |
|                 |                           |  | 15 V            | -                         | 4.0   | -                         | 4.0  | -                         | 4.0   | -                          | 4.0   | V    |
| V <sub>OH</sub> | HIGH-level output voltage | I <sub>O</sub>   < 1 μA                            | 5 V             | 4.95                      | -     | 4.95                      | -    | 4.95                      | -     | 4.95                       | -     | V    |
|                 |                           |  | 10 V            | 9.95                      | -     | 9.95                      | -    | 9.95                      | -     | 9.95                       | -     | V    |
|                 |                           |  | 15 V            | 14.95                     | -     | 14.95                     | -    | 14.95                     | -     | 14.95                      | -     | V    |
| V <sub>OL</sub> | LOW-level output voltage  | I <sub>O</sub>   < 1 μA                            | 5 V             | -                         | 0.05  | -                         | 0.05 | -                         | 0.05  | -                          | 0.05  | V    |
|                 |                           |  | 10 V            | -                         | 0.05  | -                         | 0.05 | -                         | 0.05  | -                          | 0.05  | V    |
|                 |                           |  | 15 V            | -                         | 0.05  | -                         | 0.05 | -                         | 0.05  | -                          | 0.05  | V    |
| I <sub>OH</sub> | HIGH-level output current | V <sub>O</sub> = 2.5 V                             | 5 V             | -                         | -1.7  | -                         | -1.4 | -                         | -1.1  | -                          | -1.1  | mA   |
|                 |                           | V <sub>O</sub> = 4.6 V                             | 5 V             | -                         | -0.64 | -                         | -0.5 | -                         | -0.36 | -                          | -0.36 | mA   |
|                 |                           | V <sub>O</sub> = 9.5 V                             | 10 V            | -                         | -1.6  | -                         | -1.3 | -                         | -0.9  | -                          | -0.9  | mA   |
|                 |                           | V <sub>O</sub> = 13.5 V                            | 15 V            | -                         | -4.2  | -                         | -3.4 | -                         | -2.4  | -                          | -2.4  | mA   |
| I <sub>OL</sub> | LOW-level output current  | V <sub>O</sub> = 0.4 V                             | 5 V             | 0.64                      | -     | 0.5                       | -    | 0.36                      | -     | 0.36                       | -     | mA   |
|                 |                           | V <sub>O</sub> = 0.5 V                             | 10 V            | 1.6                       | -     | 1.3                       | -    | 0.9                       | -     | 0.9                        | -     | mA   |
|                 |                           | V <sub>O</sub> = 1.5 V                             | 15 V            | 4.2                       | -     | 3.4                       | -    | 2.4                       | -     | 2.4                        | -     | mA   |
| I <sub>OZ</sub> | OFF-state output current  | QPN output is HIGH; V <sub>O</sub> = 15 V          | 15 V            | -                         | 0.4   | -                         | 0.4  | -                         | 12    | -                          | 12    | μA   |
| I <sub>I</sub>  | input leakage current     |  | 15 V            | -                         | ±0.1  | -                         | ±0.1 | -                         | ±1.0  | -                          | ±1.0  | μA   |
| I <sub>DD</sub> | supply current            | all valid input combinations; I <sub>O</sub> = 0 A | 5 V             | -                         | 5     | -                         | 5    | -                         | 150   | -                          | 150   | μA   |
|                 |                           |  | 10 V            | -                         | 10    | -                         | 10   | -                         | 300   | -                          | 300   | μA   |
|                 |                           |  | 15 V            | -                         | 20    | -                         | 20   | -                         | 600   | -                          | 600   | μA   |
| C <sub>I</sub>  | input capacitance         |  |                 | -                         | -     | -                         | 7.5  | -                         | -     | -                          | pF    |      |

## 10. Dynamic characteristics

**Table 7. Dynamic characteristics**

$V_{SS} = 0\text{ V}$ ;  $T_{amb} = 25\text{ °C}$ ; for test circuit see Fig. 10; unless otherwise specified.

| Symbol           | Parameter                           | Conditions             | V <sub>DD</sub> | Extrapolation formula               | Min | Typ | Max | Unit |
|------------------|-------------------------------------|------------------------|-----------------|-------------------------------------|-----|-----|-----|------|
| t <sub>PHL</sub> | HIGH to LOW propagation delay       | CP to QS1; see Fig. 6  | 5 V [1]         | 108 ns + (0.55 ns/pF)C <sub>L</sub> | -   | 135 | 270 | ns   |
|                  |                                     |                        | 10 V            | 54 ns + (0.23 ns/pF)C <sub>L</sub>  | -   | 65  | 130 | ns   |
|                  |                                     |                        | 15 V            | 42 ns + (0.16 ns/pF)C <sub>L</sub>  | -   | 50  | 100 | ns   |
|                  |                                     | CP to QS2; see Fig. 6  | 5 V             | 78 ns + (0.55 ns/pF)C <sub>L</sub>  | -   | 105 | 210 | ns   |
|                  |                                     |                        | 10 V            | 39 ns + (0.23 ns/pF)C <sub>L</sub>  | -   | 50  | 100 | ns   |
|                  |                                     |                        | 15 V            | 32 ns + (0.16 ns/pF)C <sub>L</sub>  | -   | 40  | 80  | ns   |
|                  |                                     | CP to QPn; see Fig. 6  | 5 V             | 138 ns + (0.55 ns/pF)C <sub>L</sub> | -   | 165 | 330 | ns   |
|                  |                                     |                        | 10 V            | 64 ns + (0.23 ns/pF)C <sub>L</sub>  | -   | 75  | 150 | ns   |
|                  |                                     |                        | 15 V            | 47 ns + (0.16 ns/pF)C <sub>L</sub>  | -   | 55  | 110 | ns   |
|                  |                                     | STR to QPn; see Fig. 7 | 5 V             | 83 ns + (0.55 ns/pF)C <sub>L</sub>  | -   | 110 | 220 | ns   |
|                  |                                     |                        | 10 V            | 39 ns + (0.23 ns/pF)C <sub>L</sub>  | -   | 50  | 100 | ns   |
|                  |                                     |                        | 15 V            | 27 ns + (0.16 ns/pF)C <sub>L</sub>  | -   | 35  | 70  | ns   |
| t <sub>PLH</sub> | LOW to HIGH propagation delay,      | CP to QS1; see Fig. 6  | 5 V [1]         | 78 ns + (0.55 ns/pF)C <sub>L</sub>  | -   | 105 | 210 | ns   |
|                  |                                     |                        | 10 V            | 39 ns + (0.23 ns/pF)C <sub>L</sub>  | -   | 50  | 100 | ns   |
|                  |                                     |                        | 15 V            | 32 ns + (0.16 ns/pF)C <sub>L</sub>  | -   | 40  | 80  | ns   |
|                  |                                     | CP to QS2; see Fig. 6  | 5 V             | 78 ns + (0.55 ns/pF)C <sub>L</sub>  | -   | 105 | 210 | ns   |
|                  |                                     |                        | 10 V            | 39 ns + (0.23 ns/pF)C <sub>L</sub>  | -   | 50  | 100 | ns   |
|                  |                                     |                        | 15 V            | 32 ns + (0.16 ns/pF)C <sub>L</sub>  | -   | 40  | 80  | ns   |
|                  |                                     | CP to QPn; see Fig. 6  | 5 V             | 123 ns + (0.55 ns/pF)C <sub>L</sub> | -   | 150 | 300 | ns   |
|                  |                                     |                        | 10 V            | 59 ns + (0.23 ns/pF)C <sub>L</sub>  | -   | 70  | 140 | ns   |
|                  |                                     |                        | 15 V            | 47 ns + (0.16 ns/pF)C <sub>L</sub>  | -   | 55  | 110 | ns   |
|                  |                                     | STR to QPn; see Fig. 7 | 5 V             | 73 ns + (0.55 ns/pF)C <sub>L</sub>  | -   | 100 | 200 | ns   |
|                  |                                     |                        | 10 V            | 34 ns + (0.23 ns/pF)C <sub>L</sub>  | -   | 45  | 90  | ns   |
|                  |                                     |                        | 15 V            | 27 ns + (0.16 ns/pF)C <sub>L</sub>  | -   | 35  | 70  | ns   |
| t <sub>t</sub>   | transition time                     |                        | 5 V [1]         | 10 ns + (1.00 ns/pF)C <sub>L</sub>  | -   | 60  | 120 | ns   |
|                  |                                     |                        | 10 V            | 9 ns + (0.42 ns/pF)C <sub>L</sub>   | -   | 30  | 60  | ns   |
|                  |                                     |                        | 15 V            | 6 ns + (0.28 ns/pF)C <sub>L</sub>   | -   | 20  | 40  | ns   |
| t <sub>PZH</sub> | OFF-state to HIGH propagation delay | OE to QPn; see Fig. 8  | 5 V             |                                     | -   | 40  | 80  | ns   |
|                  |                                     |                        | 10 V            |                                     | -   | 25  | 50  | ns   |
|                  |                                     |                        | 15 V            |                                     | -   | 20  | 40  | ns   |
| t <sub>PZL</sub> | OFF-state to LOW propagation delay  | OE to QPn; see Fig. 8  | 5 V             |                                     | -   | 40  | 80  | ns   |
|                  |                                     |                        | 10 V            |                                     | -   | 25  | 50  | ns   |
|                  |                                     |                        | 15 V            |                                     | -   | 20  | 40  | ns   |
| t <sub>PHZ</sub> | HIGH to OFF-state propagation delay | OE to QPn; see Fig. 8  | 5 V             |                                     | -   | 75  | 150 | ns   |
|                  |                                     |                        | 10 V            |                                     | -   | 40  | 80  | ns   |
|                  |                                     |                        | 15 V            |                                     | -   | 30  | 60  | ns   |
| t <sub>PLZ</sub> | LOW to OFF-state propagation delay  | OE to QPn; see Fig. 8  | 5 V             |                                     | -   | 80  | 160 | ns   |
|                  |                                     |                        | 10 V            |                                     | -   | 40  | 80  | ns   |
|                  |                                     |                        | 15 V            |                                     | -   | 30  | 60  | ns   |

| Symbol           | Parameter         | Conditions                                  | V <sub>DD</sub> | Extrapolation formula | Min | Typ | Max | Unit |
|------------------|-------------------|---|-----------------|-----------------------|-----|-----|-----|------|
| t <sub>su</sub>  | set-up time       | D to CP;<br>see Fig. 9                      | 5 V             |                       | 60  | 30  | -   | ns   |
|                  |                   |   | 10 V            |                       | 20  | 10  | -   | ns   |
|                  |                   |   | 15 V            |                       | 15  | 5   | -   | ns   |
| t <sub>h</sub>   | hold time         | D to CP;<br>see Fig. 9                      | 5 V             |                       | +5  | -15 | -   | ns   |
|                  |                   |   | 10 V            |                       | 20  | 5   | -   | ns   |
|                  |                   |   | 15 V            |                       | 20  | 5   | -   | ns   |
| t <sub>w</sub>   | pulse width       | minimum LOW<br>clock pulse; see<br>Fig. 6   | 5 V             |                       | 60  | 30  | -   | ns   |
|                  |                   |   | 10 V            |                       | 30  | 15  | -   | ns   |
|                  |                   |   | 15 V            |                       | 24  | 12  | -   | ns   |
|                  |                   | minimum HIGH<br>strobe pulse;<br>see Fig. 7 | 5 V             |                       | 40  | 20  | -   | ns   |
|                  |                   |   | 10 V            |                       | 30  | 15  | -   | ns   |
|                  |                   |   | 15 V            |                       | 24  | 12  | -   | ns   |
| f <sub>max</sub> | maximum frequency | see Fig. 6                                  | 5 V             |                       | 5   | 10  | -   | MHz  |
|                  |                   |   | 10 V            |                       | 11  | 22  | -   | MHz  |
|                  |                   |   | 15 V            |                       | 14  | 28  | -   | MHz  |


[1] The typical values of the propagation delay and transition times are calculated from the extrapolation formulas shown (C<sub>L</sub> in pF).


**Table 8. Dynamic power dissipation**

V<sub>SS</sub> = 0 V; t<sub>r</sub> = t<sub>f</sub> ≤ 20 ns; T<sub>amb</sub> = 25 °C.

| Symbol         | Parameter                 | V <sub>DD</sub> | Typical formula for P <sub>D</sub> (μW)                           | where:  |
|----------------|---------------------------|-----------------|---|---|
| P <sub>D</sub> | dynamic power dissipation | 5 V             | $P_D = 2100 \times f_i + \Sigma(f_o \times C_L) \times V_{DD}^2$  | f <sub>i</sub> = input frequency in MHz,<br>f <sub>o</sub> = output frequency in MHz,<br>C <sub>L</sub> = output load capacitance in pF,<br>V <sub>DD</sub> = supply voltage in V,<br>Σ(f <sub>o</sub> × C <sub>L</sub> ) = sum of the outputs. |
|                |                           | 10 V            | $P_D = 9700 \times f_i + \Sigma(f_o \times C_L) \times V_{DD}^2$  |   |
|                |                           | 15 V            | $P_D = 26000 \times f_i + \Sigma(f_o \times C_L) \times V_{DD}^2$ |   |

### 10.1. Waveforms and test circuit

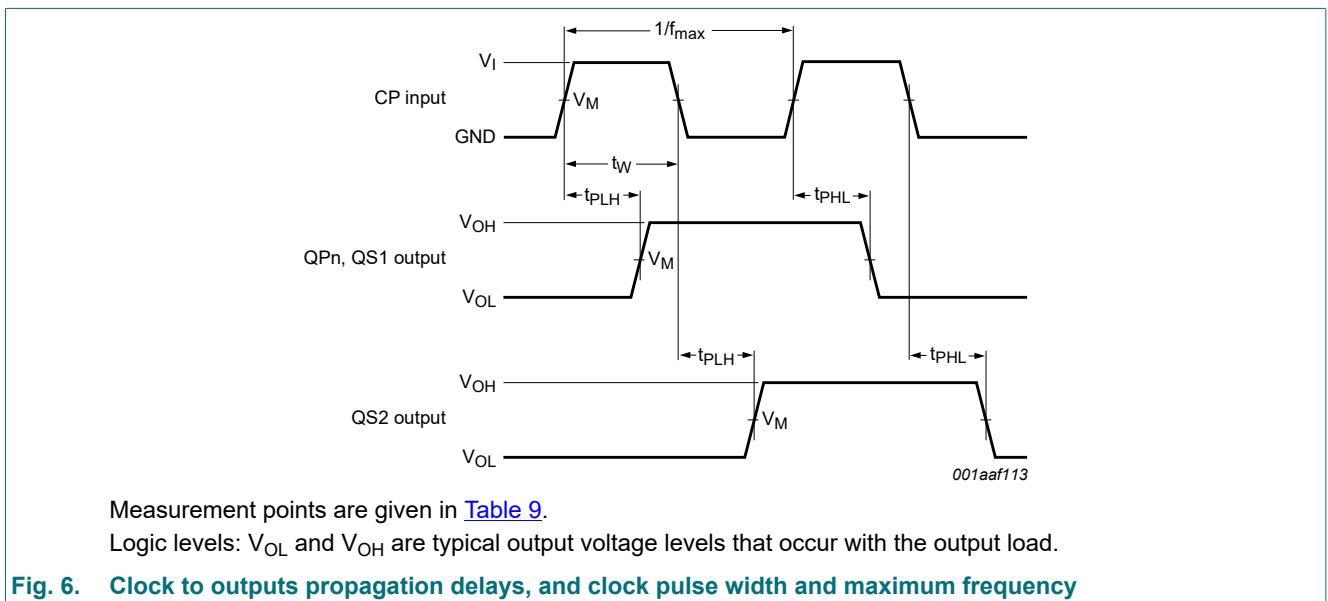


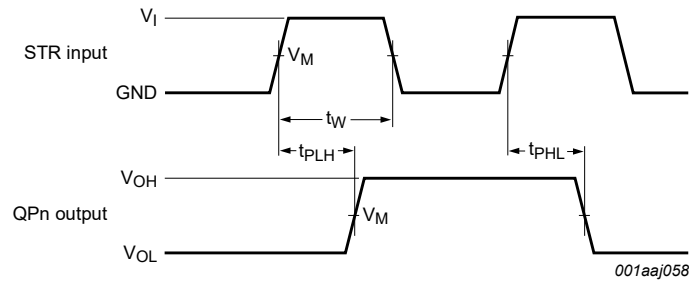

Measurement points are given in [Table 9](#).

Logic levels:  $V_{OL}$  and  $V_{OH}$  are typical output voltage levels that occur with the output load.


**Fig. 7. Strobe to output propagation delays, and strobe pulse width, set up and hold times**

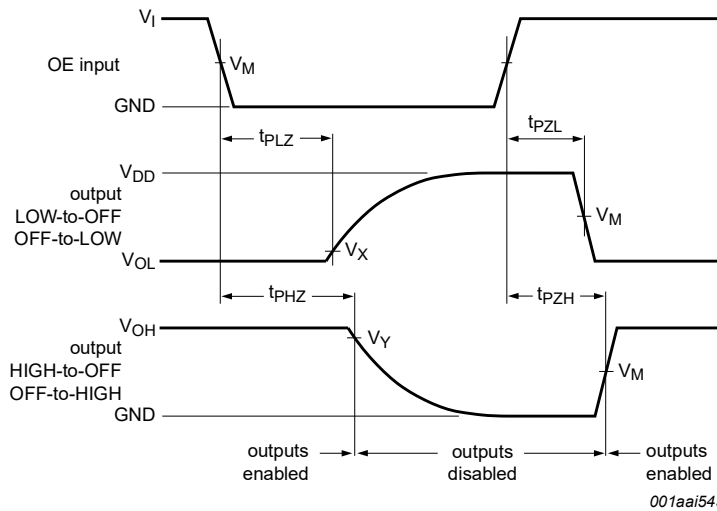

Measurement points are given in [Table 9](#).

Logic levels:  $V_{OL}$  and  $V_{OH}$  are typical output voltage levels that occur with the output load.

**Fig. 8. 3-state output enable and disable times for OE input**

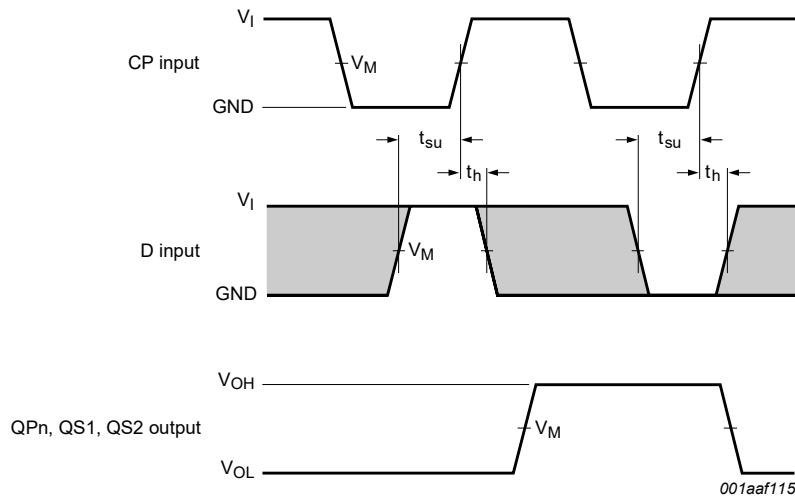

Measurement points are given in [Table 9](#).

Logic levels:  $V_{OL}$  and  $V_{OH}$  are typical output voltage levels that occur with the output load.

**Fig. 9. Data input data set up and hold times**

Table 9. Measurement points

| Supply voltage | Input       | Output      |             |             |
|----------------|-------------|-------------|-------------|-------------|
| $V_{DD}$       | $V_M$       | $V_M$       | $V_X$       | $V_Y$       |
| 5 V to 15 V    | $0.5V_{DD}$ | $0.5V_{DD}$ | $0.1V_{DD}$ | $0.9V_{DD}$ |

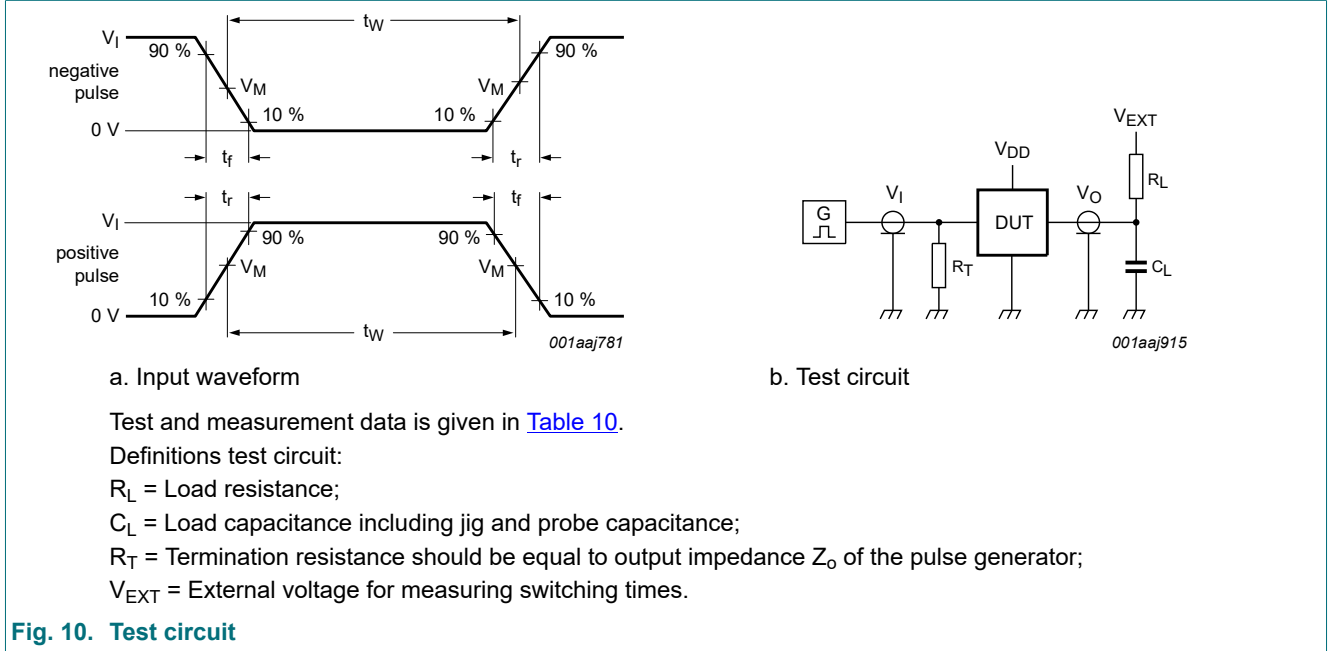


Fig. 10. Test circuit

Table 10. Test data

| Supply voltage | Input                |              | $V_{EXT}$          | Load               |                    |                     |
|----------------|----------------------|--------------|--------------------|--------------------|--------------------|---------------------|
| $V_{DD}$       | $V_I$                | $t_r, t_f$   | $t_{PHL}, t_{PLH}$ | $t_{PHZ}, t_{PZH}$ | $t_{PLZ}, t_{PZL}$ | $C_L, R_L$          |
| 5 V to 15 V    | $V_{SS}$ or $V_{DD}$ | $\leq 20$ ns | open               | $V_{SS}$           | $V_{DD}$           | 50 pF, 1 k $\Omega$ |

## 11. Application information

Some examples of applications for the HEF4094B are:

- Serial-to-parallel data conversion
- Remote control holding register

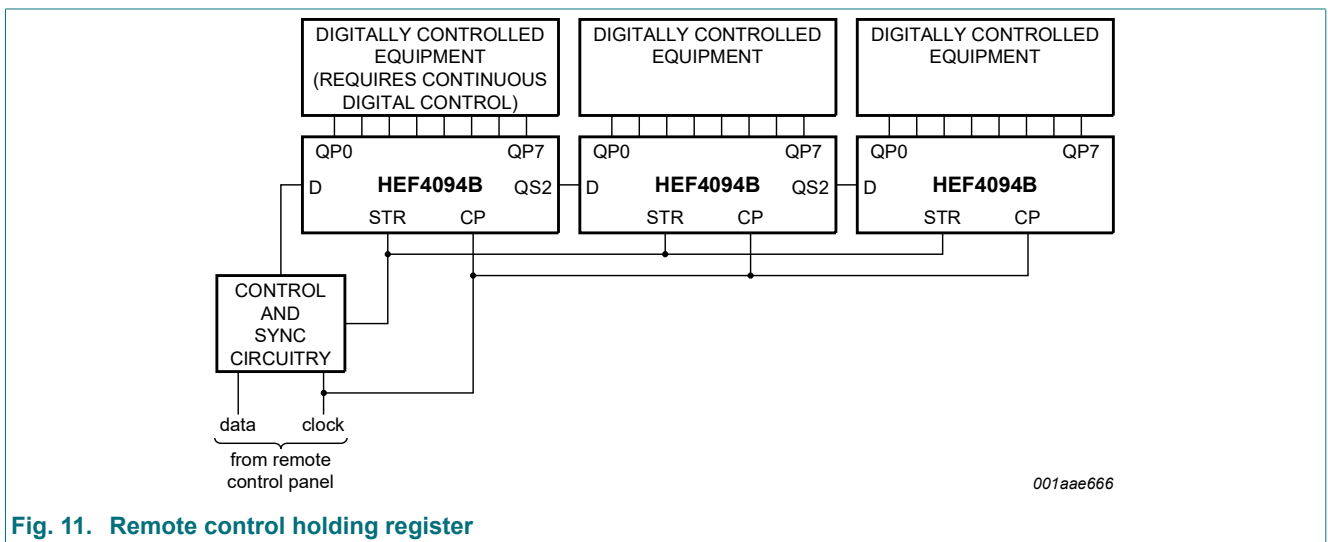


Fig. 11. Remote control holding register

## 12. Package outline

SO16: plastic small outline package; 16 leads; body width 3.9 mm

SOT109-1

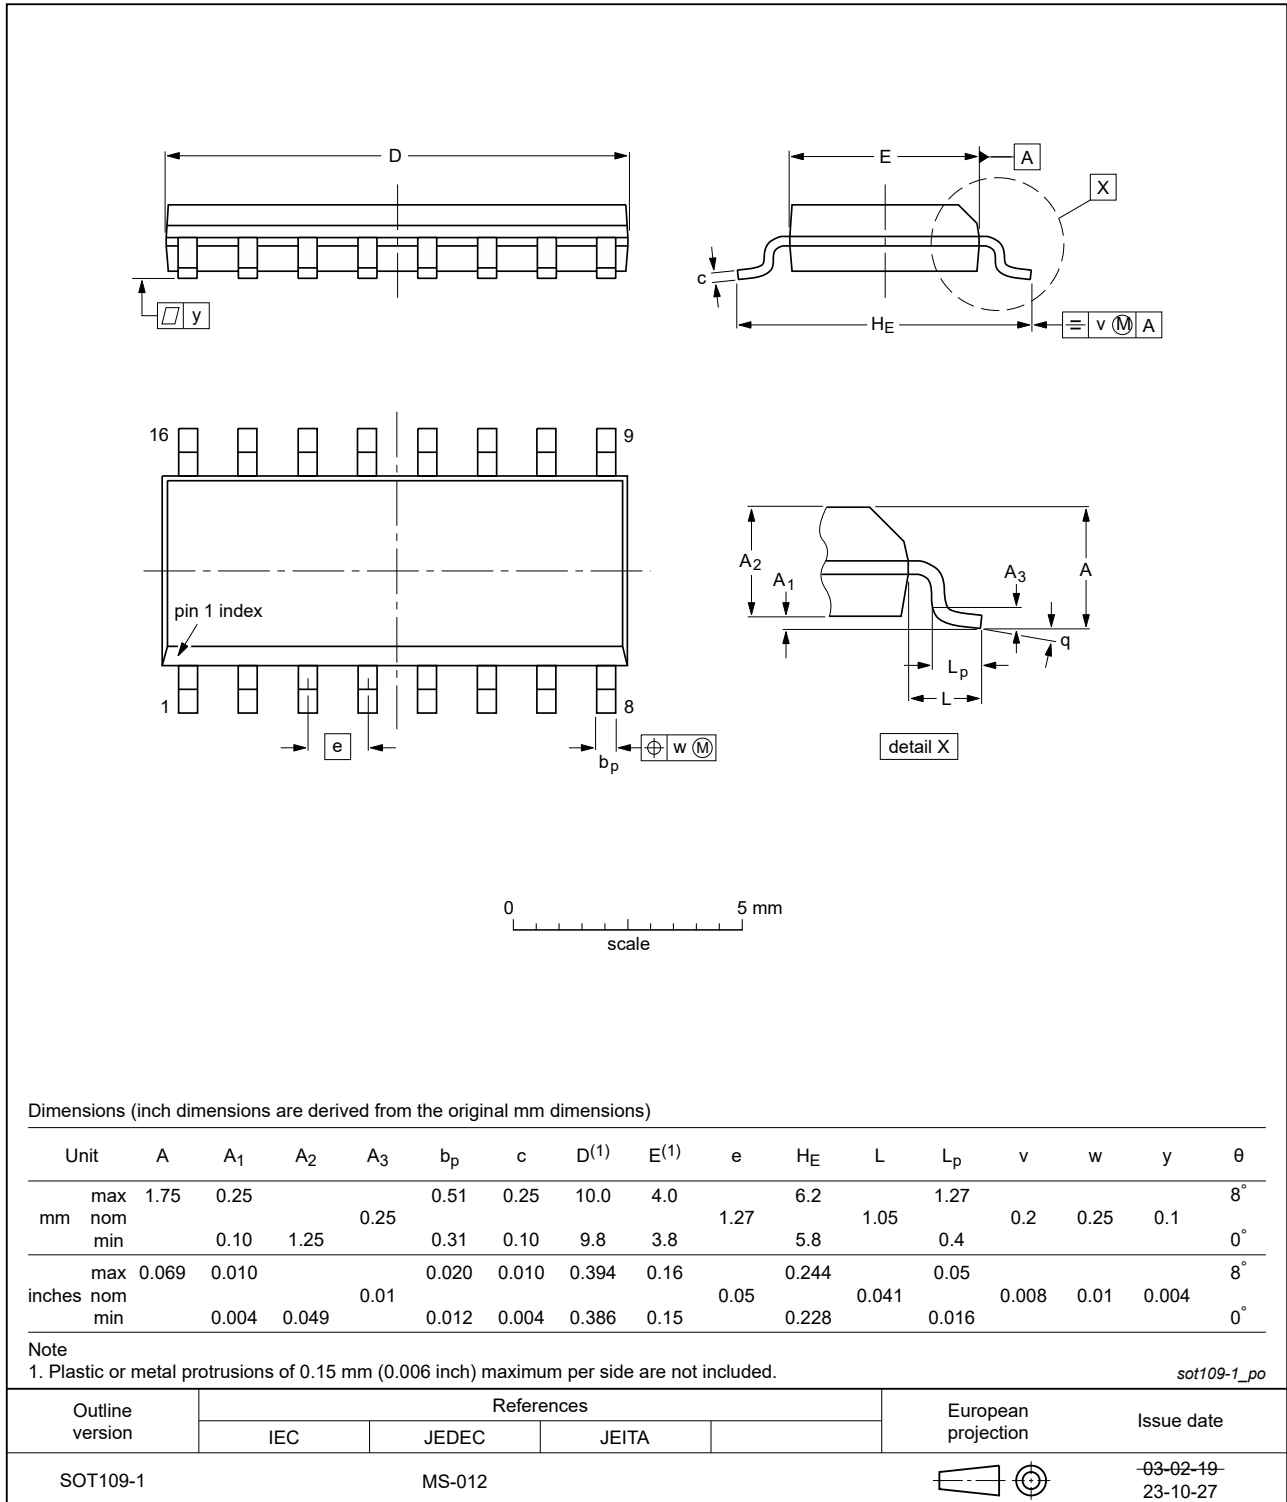


Fig. 12. Package outline SOT109-1 (SO16)

TSSOP16: plastic thin shrink small outline package; 16 leads; body width 4.4 mm

SOT403-1



Fig. 13. Package outline SOT403-1 (TSSOP16)

## 13. Abbreviations

Table 11. Abbreviations

| Acronym | Description                               |
|---------|---|
| ANSI    | American National Standards Institute     |
| CDM     | Charged Device Model                      |
| CMOS    | Complementary Metal-Oxide Semiconductor   |
| DUT     | Device Under Test                         |
| ESD     | ElectroStatic Discharge                   |
| ESDA    | ElectroStatic Discharge Association       |
| HBM     | Human Body Model                          |
| JEDEC   | Joint Electron Device Engineering Council |

## 14. Revision history

Table 12. Revision history

| Document ID      | Release date  | Data sheet status     | Change notice | Supersedes       |
|------------------|---|-----------------------|---------------|------------------|
| HEF4094B v.15    | 20240905  | Product data sheet    | -             | HEF4094B v.14    |
| Modifications:   | <ul style="list-style-type: none"> <li><a href="#">Section 2</a>: ESD specification updated according to the latest JEDEC standard.</li> <li><a href="#">Fig. 12</a>, <a href="#">Fig. 13</a>: Aligned SO and TSSOP package outline drawings to JEDEC MS-012 and MO-153</li> </ul>            |                       |               |                  |
| HEF4094B v.14    | 20210708  | Product data sheet    | -             | HEF4094B v.13    |
| Modifications:   | <ul style="list-style-type: none"> <li>Type number HEF4094BTS (SOT338-1 / SSOP16) removed.</li> <li><a href="#">Section 1</a> and <a href="#">Section 2</a> updated.</li> <li><a href="#">Section 7</a>: Derating values for <math>P_{tot}</math> total power dissipation updated.</li> </ul> |                       |               |                  |
| HEF4094B v.13    | 20181114  | Product data sheet    | -             | HEF4094B v.11    |
| Modifications:   | <ul style="list-style-type: none"> <li>The format of this data sheet has been redesigned to comply with the identity guidelines of Nexperia.</li> <li>Legal texts have been adapted to the new company name where appropriate.</li> <li><a href="#">Fig. 5</a> corrected.</li> </ul>          |                       |               |                  |
| HEF4094B v.12    | 20160325  | Product data sheet    | -             | HEF4094B v.11    |
| Modifications:   | <ul style="list-style-type: none"> <li>Type number HEF4094BP (SOT38-4) removed.</li> </ul>  |                       |               |                  |
| HEF4094B v.11    | 20130829  | Product data sheet    | -             | HEF4094B v.10    |
| Modifications:   | <ul style="list-style-type: none"> <li><a href="#">Table 4</a>: Table note corrected (errata).</li> </ul>   |                       |               |                  |
| HEF4094B v.10    | 20130625  | Product data sheet    | -             | HEF4094B v.9     |
| Modifications:   | <ul style="list-style-type: none"> <li>added type number HEF4094BTT.</li> </ul>   |                       |               |                  |
| HEF4094B v.9     | 20111116  | Product data sheet    | -             | HEF4094B v.8     |
| Modifications:   | <ul style="list-style-type: none"> <li><a href="#">Table 6</a>: <math>I_{OH}</math> minimum values changed to maximum</li> </ul>  |                       |               |                  |
| HEF4094B v.8     | 20100402  | Product data sheet    | -             | HEF4094B v.7     |
| HEF4094B v.7     | 20091216  | Product data sheet    | -             | HEF4094B v.6     |
| HEF4094B v.6     | 20091103  | Product data sheet    | -             | HEF4094B v.5     |
| HEF4094B v.5     | 20090728  | Product data sheet    | -             | HEF4094B v.4     |
| HEF4094B v.4     | 20081030  | Product data sheet    | -             | HEF4094B_CNV v.3 |
| HEF4094B_CNV v.3 | 19950101  | Product specification | -             | HEF4094B_CNV v.2 |
| HEF4094B_CNV v.2 | 19950101  | Product specification | -             | -                |

## 15. Legal information

### Data sheet status

| Document status [1][2]         | Product status [3] | Definition  |
|--------------------------------|--------------------|---|
| Objective [short] data sheet   | Development        | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet | Qualification      | This document contains data from the preliminary specification.                       |
| Product [short] data sheet     | Production         | This document contains the product specification.                                     |

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <https://www.nexperia.com>.

### Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

**Right to make changes** — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal

injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nexperia.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

### Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## Contents

---

|  |           |
|--|-----------|
| <b>1. General description</b> .....              | <b>1</b>  |
| <b>2. Features and benefits</b> .....            | <b>1</b>  |
| <b>3. Ordering information</b> .....             | <b>1</b>  |
| <b>4. Functional diagram</b> .....               | <b>2</b>  |
| <b>5. Pinning information</b> .....              | <b>3</b>  |
| 5.1. Pinning.....                                | 3         |
| 5.2. Pin description.....                        | 3         |
| <b>6. Functional description</b> .....           | <b>4</b>  |
| <b>7. Limiting values</b> .....                  | <b>5</b>  |
| <b>8. Recommended operating conditions</b> ..... | <b>5</b>  |
| <b>9. Static characteristics</b> .....           | <b>6</b>  |
| <b>10. Dynamic characteristics</b> .....         | <b>7</b>  |
| 10.1. Waveforms and test circuit.....            | 8         |
| <b>11. Application information</b> .....         | <b>10</b> |
| <b>12. Package outline</b> .....                 | <b>11</b> |
| <b>13. Abbreviations</b> .....                   | <b>13</b> |
| <b>14. Revision history</b> .....                | <b>13</b> |
| <b>15. Legal information</b> .....               | <b>14</b> |

---

© Nexperia B.V. 2024. All rights reserved

For more information, please visit: <http://www.nexperia.com>

For sales office addresses, please send an email to: [salesaddresses@nexperia.com](mailto:salesaddresses@nexperia.com)

Date of release: 5 September 2024

---

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View HEF4094BP,652 on WIN SOURCE](#)

 [Nexperia USA Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management