

Part No. M830320

Wi-Fi / BT / Zigbee Ceramic Antenna

2.4 GHz

Supports: Wi-Fi applications, Bluetooth, Zigbee, WLAN



KYOCERA AVX's series of Ceramic Isolated Magnetic Dipole™ (IMD) antennas deliver on the key needs of device designers for higher functionality and performance in smaller/thinner designs. These innovative antennas provide compelling advantages for Bluetooth® enabled mobile devices.

Real-World Performance and Implementation

Ceramic antennas may look alike on the outside, but the important difference is inside. Other antennas may contain simple PiFA or monopole designs that interact with their surroundings, complicating layout and compromising performance. KYOCERA AVX's antennas utilize patented IMD technology to deliver optimum performance in a miniature size configuration.

Ceramic Wi-Fi / Bluetooth Antenna

2400 – 2485 MHz

Greater Flexibility

KYOCERA AVX's first-in-class IMD technology enables you to develop designs that are more advanced and that deliver superior performance in reception critical applications.

Electrical Specifications

Typical performance on a 40 x 60 mm PCB

Frequency (MHz)	2400 – 2485
Peak Gain	1.8 dBi
Average Efficiency	72%
VSWR Match	2.0:1 max
Feed Point Impedance	50 ohms unbalanced
Polarization	Linear
Power Handling	0.5 Watt CW
Additional Resources	Download Application Note and Simulation Files

KEY BENEFITS

Stay-in-Tune

IMD antenna technology provides superior RF field containment, resulting in less interaction with surrounding components.

Quicker Time-to-Market

By optimizing antenna size, performance and emissions, customer and regulatory specifications are more easily met.

Environmental Compliance

Products are the latest RoHS version compliant.

APPLICATIONS

- Embedded design
- Cellular, Headsets, Tablets
- Gateway, Access Point
- Handheld
- Telematics
- Tracking
- Healthcare (FDA Class I)
- M2M, Industrial devices
- Smart Grid
- OBD-II

Mechanical Specifications & Ordering Part Number


Ordering Part Number	M830320
Size (mm)	8.0 x 3.0 x 1.3
Mounting	Surface mounted
Weight (grams)	0.2
Packaging	Tape & Reel, M830320 – 1,000 pieces per reel
Demo Board	M830320-01
Additional Resources	Download DXF, Gerber and 3D FIT Files

2.4 GHz KYOCERA AVX Embedded Antenna Specifications
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


VSWR, Efficiency Plots

Typical performance on 40 x 60 mm PCB

VSWR




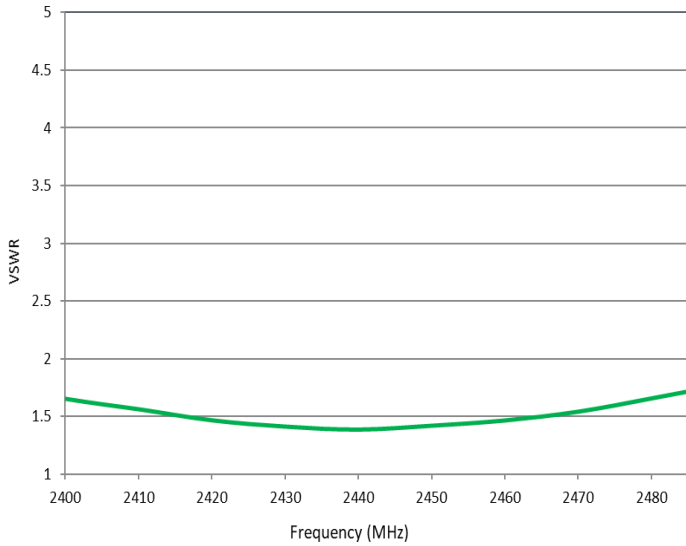


Efficiency

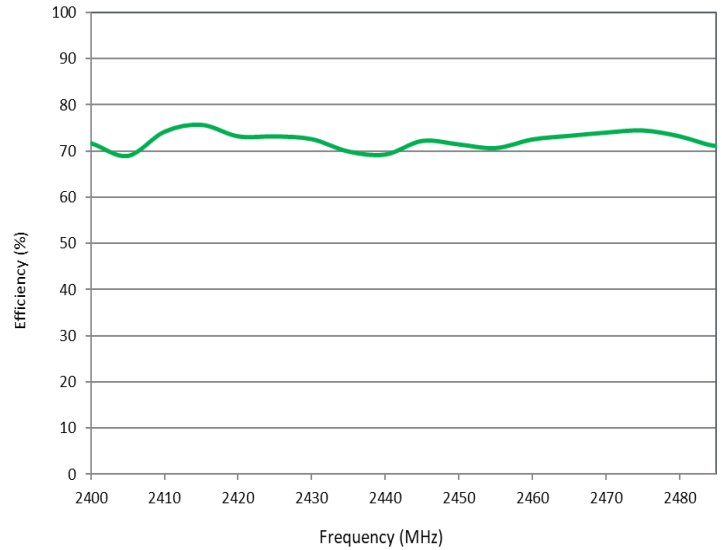

Antenna Radiation Patterns

Typical performance on 40 x 60 mm PCB
 Measured @ 2440 MHz

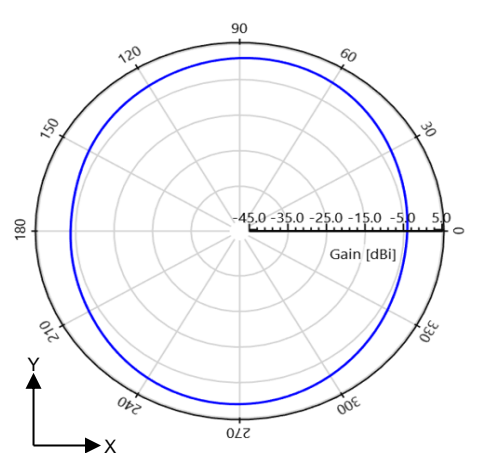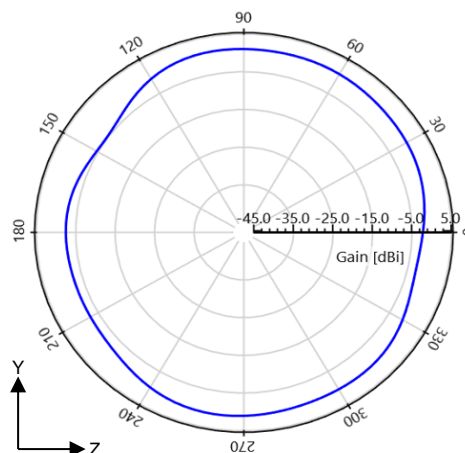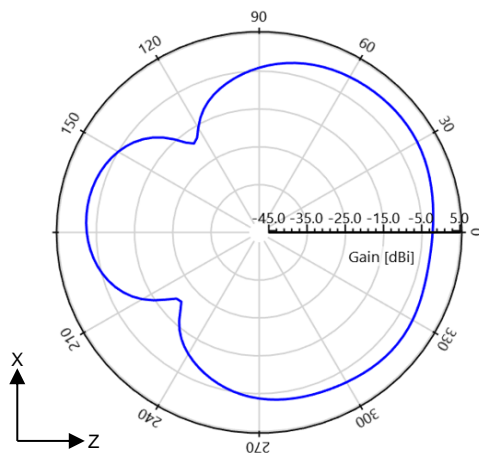
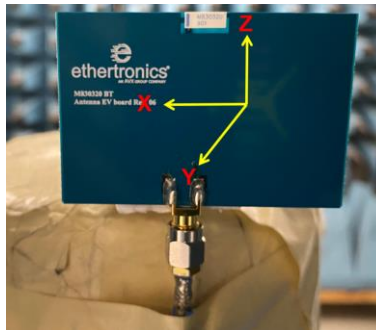


2.4 GHz KYOCERA AVX Embedded Antenna Specifications
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


Antenna Dimensions

Typical antenna dimensions (mm)

Part Number	A (mm)	B (mm)	C (mm)
M830320	8.0 ± 0.2	3.0 ± 0.2	1.33 ± 0.1

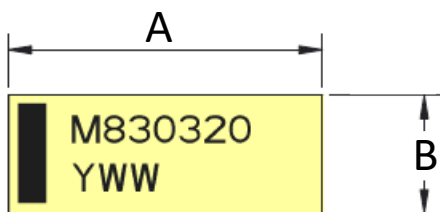


TOP VIEW

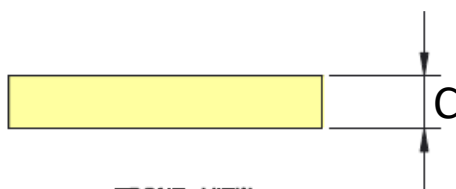

FRONT VIEW

Pin	Description
1	Feed
2	Ground
3	Dummy Pad
4	Tuning Pad
5	Dummy Pad
6	Dummy Pad


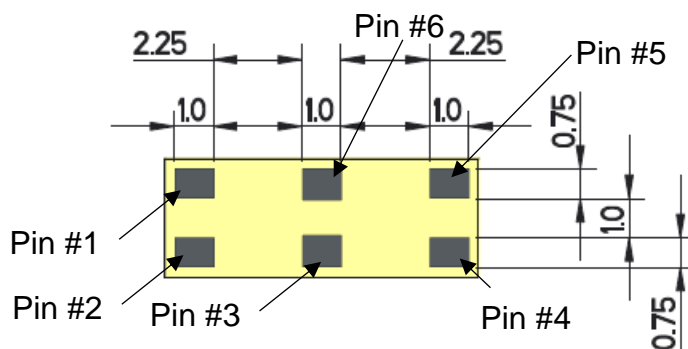


BOTTOM VIEW

2.4 GHz KYOCERA AVX Embedded Antenna Specifications
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Layout


Typical layout dimensions (mm)

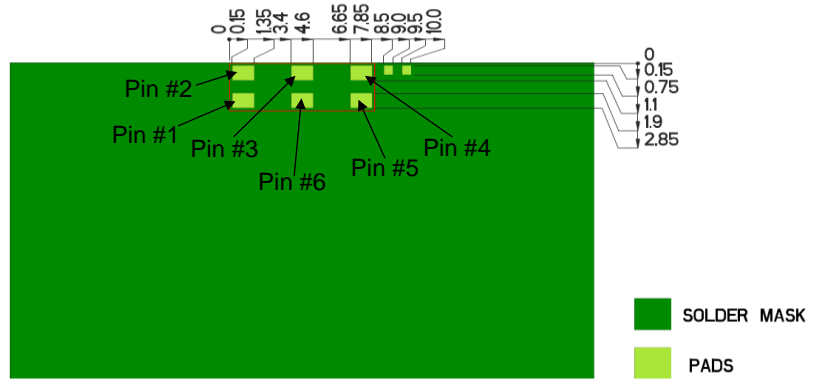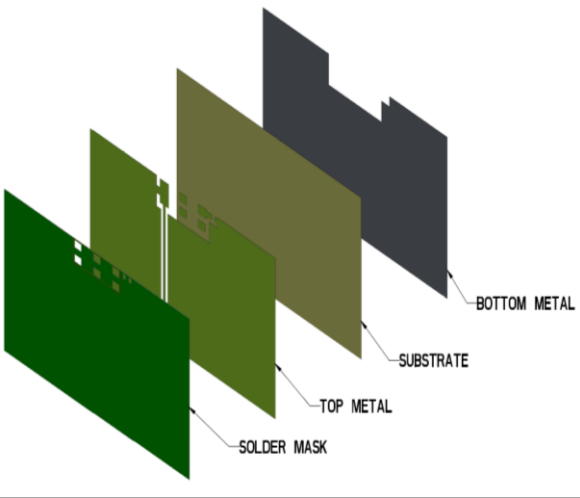

- Additional VIAS: Diam. 0.2mm to be placed around antenna, (no vias on transmission lines).
- Via holes must be covered by solder mask

Pin Descriptions



Pin#	Description
1	Feed
2	Ground
3	Dummy Pad
4	Tuning Pad
5	Dummy Pad
6	Dummy Pad

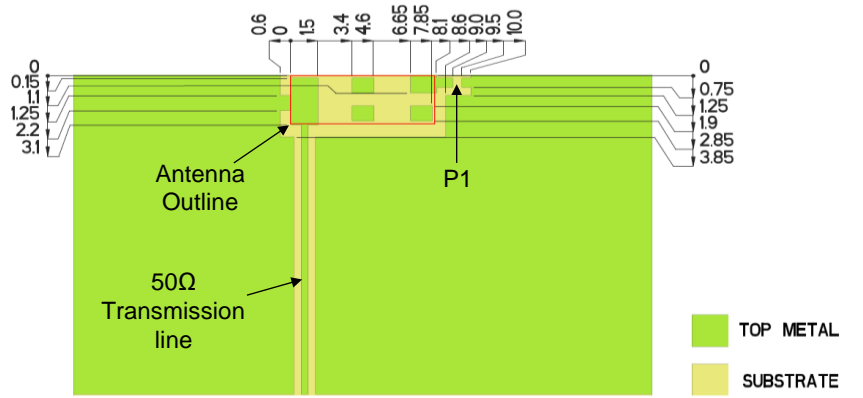

Matching Network (Demo Board)

Component	Value	Tolerance
P1	0Ω	N/A


*Actual matching values depend on customer design

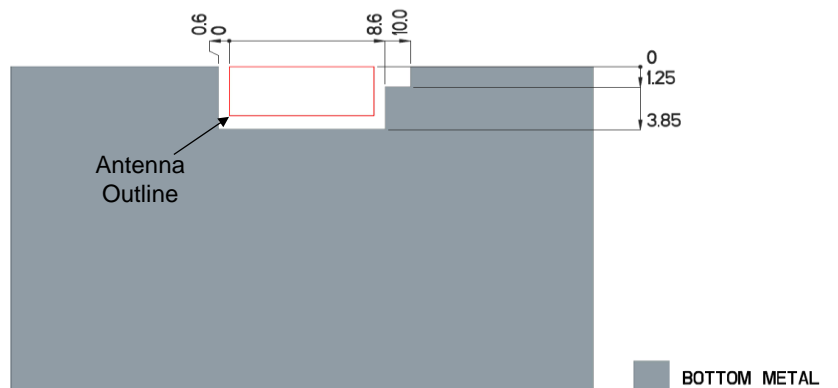


2.4 GHz KYOCERA AVX Embedded Antenna Specifications
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Layout Tips (General reference)

Important, layout guidelines for correct operation of KYOCERA AVX's Ceramic Antennas. Please read guidelines below before laying out the antenna in a device. Figure 1 shows the typical antenna layout. Figure 2 shows KYOCERA AVX's antenna layout.

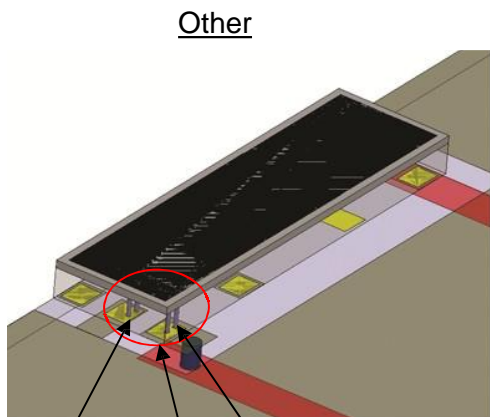

Other
 Shorting pin Feed pin
 Antenna tuning loop:
 Figure 1
 Typical Antenna Layout

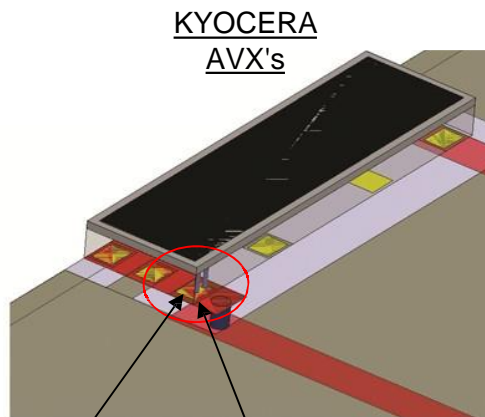

KYOCERA
 AVX's
 Shorting pin and feed pin are shared in
 KYOCERA AVX's ceramic antennas

Figure 2
 KYOCERA AVX's Antenna
 Layout
 (Required)


- The antenna tuning loop is formed by the PCB layout.
- The feed pin and shorting pin are combined because it requires very close proximity to achieve more band- width.

2.4 GHz KYOCERA AVX Embedded Antenna Specifications
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Demo Board

Typical layout dimensions (mm)

Part Number	A (mm)	B (mm)	C (mm)
M830320-01	60.0	40.0	26.0

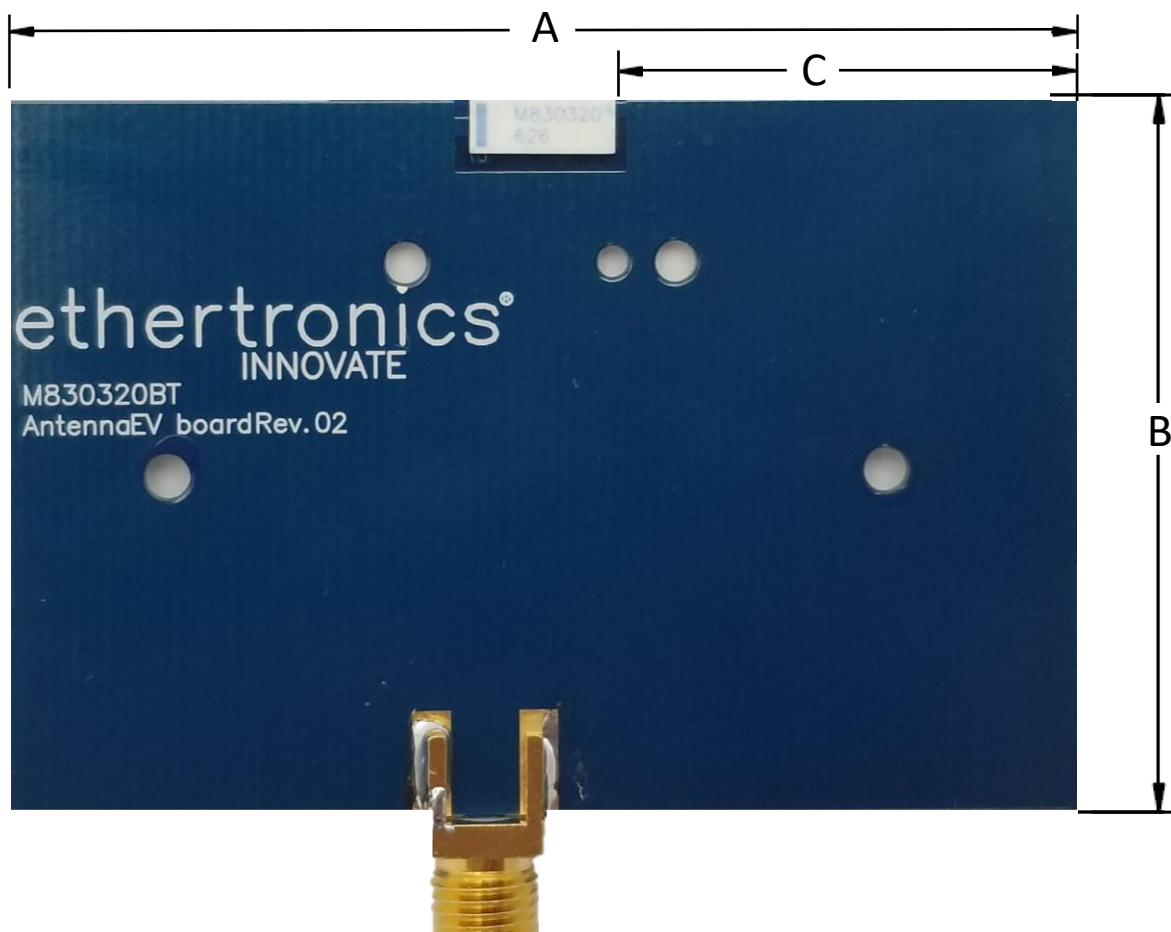

2.4 GHz KYOCERA AVX Embedded Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Additional Resources – M830320

Simulation Files:

HFSS (23 R1): https://www.kyocera-avx.com/download/antennas/ansys-hfss/23r1/M830320_08232022_23r1.zip

HFSS (19R3-22R2): https://www.kyocera-avx.com/download/antennas/ansys-hfss/19r3/M830320_08232022_19r3.zip

Application Note:

https://www.kyocera-avx.com/docs/techinfo/ApplicationNotes/Antenna-AppNotes/AVX-E_AppNote-M-Series.pdf

3D FIT File:

https://www.kyocera-avx.com/download/antennas/ME-FIT/M830320_ME_fit.zip

DXF File:


https://www.kyocera-avx.com/download/antennas/3D-DXF/M830320_3D-DXF.zip

Gerber File:

https://www.kyocera-avx.com/download/antennas/GERBER/M830320_GERBERS.zip

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View M830320](#) on WIN SOURCE

 [AVX Corporation](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management