



**THE DATASHEET OF  
SMAJ4764CE3/TR13**





8700 E. Thomas Road  
 Scottsdale, AZ 85252  
 Phone: (480) 941-6300  
 Fax: (480) 947-1503

**SMAJ4728A  
 THRU  
 SMAJ4764A**

**SILICON  
 2 WATT  
 ZENER DIODES**

**Features**

- For surface mount applications (flat handling surface for accurate placement)
- 3.3 thru 100 Volt Voltage Range
- High Surge Current Rating
- Higher Voltages Available
- Electrically Equivalent to JEDEC Registered 1N4728A thru 1N4764A
- Available on Tape and Reel.

**Mechanical Data**


- Package similar to JEDEC DO-214AC (see dimension 'A' note)
- Terminals solderable per MIL-STD-750, Method 2026
- Polarity is indicated by cathode band.
- Maximum temperature for soldering: 260°C for 10 seconds.
- For surface mount applications with flame retardent epoxy meeting UL94V-0

**Maximum Ratings @ 25°C Unless Otherwise Specified**

|                                    |                 |                 |             |
|------------------------------------|-----------------|-----------------|-------------|
| Maximum Forward Voltage            | $V_F$           | 1.2V            | (Note: 1)   |
| Peak Surge Current                 | $I_s$           | See Table 1     |             |
| Steady State Power Dissipation     | $P_{(AV)}$      | 2.0W            | (Note: 2,3) |
| Operating And Storage Temperatures | $T_J, T_{STG}$  | -55°C to +150°C |             |
| Thermal Resistance                 | $R_{\theta JL}$ | 25°C/W          |             |

**NOTES:**

1. Forward Current @ 200mA.
2. Mounted on 4.0mm<sup>2</sup> copper pads to each terminal.
3. Lead temperature at 100°C or less. Derate linearly above 100°C to zero power at 150°C.

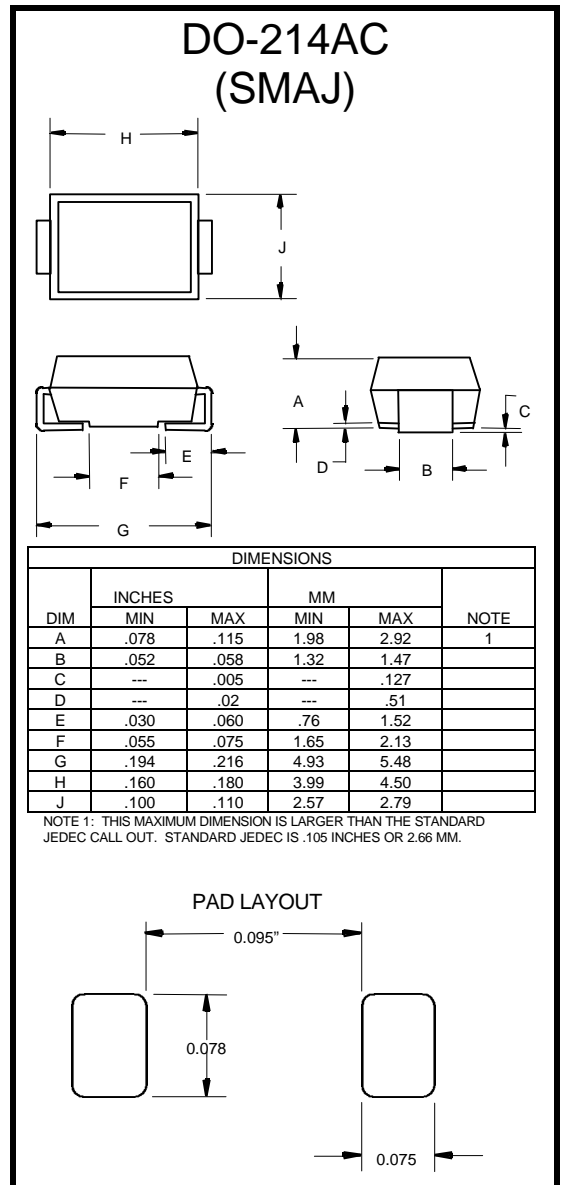

## SMAJ4728A thru SMAJ4764A

### Electrical Characteristics @ 25°C Unless Otherwise Specified

| PART NUMBER | ZENER VOLTAGE (V <sub>Z</sub> )<br>(NOTE 4) | TEST CURRENT (I <sub>ZT</sub> ) | MAXIMUM DYNAMIC IMPEDANCE (Z <sub>ZT</sub> @ I <sub>ZT</sub> )<br>(NOTE 2) | MAXIMUM REVERSE CURRENT (I <sub>R</sub> @ V <sub>R</sub> ) | TEST VOLTAGE (V <sub>R</sub> ) | MAXIMUM REGULATOR CURRENT (I <sub>ZM</sub> )<br>T <sub>L</sub> = 100 °C | MAXIMUM KNEE IMPEDANCE (Z <sub>ZK</sub> @ I <sub>ZK</sub> )<br>(NOTE 2) | TEST CURRENT (I <sub>ZK</sub> ) | MAXIMUM (SURGE) CURRENT (I <sub>S</sub> )<br>(NOTE 3) |
|-------------|---|---------------------------------|--|--|--------------------------------|---|---|---------------------------------|---|
|             | VOLTS                                       | mA                              | OHMS   | µA   | VOLTS                          | MA  | OHMS  | mA                              | mA  |
| SMAJ4728A   | 3.3   | 76                              | 10   | 100  | 1                              | 552   | 400   | 1.0                             | 1380  |
| SMAJ4729A   | 3.6   | 69                              | 10   | 100  | 1                              | 504   | 400   | 1.0                             | 1260  |
| SMAJ4730A   | 3.9   | 64                              | 9  | 50   | 1                              | 468   | 400   | 1.0                             | 1190  |
| SMAJ4731A   | 4.3   | 58                              | 9  | 10   | 1                              | 434   | 400   | 1.0                             | 1070  |
| SMAJ4732A   | 4.7   | 53                              | 8  | 10   | 1                              | 386   | 500   | 1.0                             | 970   |
| SMAJ4733A   | 5.1   | 49                              | 7  | 10   | 1                              | 356   | 550   | 1.0                             | 890   |
| SMAJ4734A   | 5.6   | 45                              | 5  | 10   | 2                              | 324   | 600   | 1.0                             | 810   |
| SMAJ4735A   | 6.2   | 41                              | 2  | 10   | 3                              | 292   | 700   | 1.0                             | 730   |
| SMAJ4736A   | 6.8   | 37                              | 3.5  | 10   | 4                              | 266   | 700   | 1.0                             | 660   |
| SMAJ4737A   | 7.5   | 34                              | 4.0  | 10   | 5                              | 242   | 700   | 0.5                             | 605   |
| SMAJ4738A   | 8.2   | 31                              | 4.5  | 10   | 6                              | 220   | 700   | 0.5                             | 550   |
| SMAJ4739A   | 9.1   | 28                              | 5.0  | 10   | 7                              | 200   | 700   | 0.5                             | 500   |
| SMAJ4740A   | 10  | 25                              | 7  | 10   | 7.6                            | 182   | 700   | 0.25                            | 454   |
| SMAJ4741A   | 11  | 23                              | 8  | 5  | 8.4                            | 166   | 700   | 0.25                            | 414   |
| SMAJ4742A   | 12  | 21                              | 9  | 5  | 9.1                            | 152   | 700   | 0.25                            | 380   |
| SMAJ4743A   | 13  | 19                              | 10   | 5  | 9.9                            | 138   | 700   | 0.25                            | 344   |
| SMAJ4744A   | 15  | 17                              | 14   | 5  | 11.4                           | 132   | 700   | 0.25                            | 304   |
| SMAJ4745A   | 16  | 15.5                            | 16   | 5  | 12.2                           | 114   | 700   | 0.25                            | 285   |
| SMAJ4746A   | 18  | 14                              | 20   | 5  | 13.7                           | 100   | 750   | 0.25                            | 250   |
| SMAJ4747A   | 20  | 12.5                            | 22   | 5  | 15.2                           | 90  | 750   | 0.25                            | 225   |
| SMAJ4748A   | 22  | 11.5                            | 23   | 5  | 16.7                           | 82  | 720   | 0.25                            | 205   |
| SMAJ4749A   | 24  | 10.5                            | 25   | 5  | 18.2                           | 76  | 750   | 0.25                            | 190   |
| SMAJ4750A   | 27  | 9.5                             | 35   | 5  | 20.6                           | 68  | 750   | 0.25                            | 170   |
| SMAJ4751A   | 30  | 8.5                             | 40   | 5  | 22.8                           | 60  | 1000  | 0.25                            | 150   |
| SMAJ4752A   | 33  | 7.5                             | 45   | 5  | 25.1                           | 54  | 1000  | 0.25                            | 135   |
| SMAJ4753A   | 36  | 7.0                             | 50   | 5  | 27.4                           | 50  | 1000  | 0.25                            | 125   |
| SMAJ4754A   | 39  | 6.5                             | 60   | 5  | 29.7                           | 46  | 1000  | 0.25                            | 115   |
| SMAJ4755A   | 43  | 6.0                             | 70   | 5  | 32.7                           | 44  | 1500  | 0.25                            | 110   |
| SMAJ4756A   | 47  | 5.5                             | 80   | 5  | 35.8                           | 38  | 1500  | 0.25                            | 95  |
| SMAJ4757A   | 51  | 5.0                             | 95   | 5  | 38.8                           | 36  | 1500  | 0.25                            | 90  |
| SMAJ4758A   | 56  | 4.5                             | 110  | 5  | 42.6                           | 32  | 2000  | 0.25                            | 80  |
| SMAJ4759A   | 62  | 4.0                             | 125  | 5  | 47.1                           | 28  | 2000  | 0.25                            | 70  |
| SMAJ4760A   | 68  | 3.7                             | 150  | 5  | 51.7                           | 26  | 2000  | 0.25                            | 65  |
| SMAJ4761A   | 75  | 3.3                             | 175  | 5  | 56.0                           | 24  | 2000  | 0.25                            | 60  |
| SMAJ4762A   | 82  | 3.0                             | 200  | 5  | 62.2                           | 22  | 3000  | 0.25                            | 55  |
| SMAJ4763A   | 91  | 2.8                             | 250  | 5  | 69.2                           | 20  | 3000  | 0.25                            | 50  |
| SMAJ4764A   | 100   | 2.5                             | 350  | 5  | 76.0                           | 18  | 3000  | 0.25                            | 45  |

- NOTE:**
- The type numbers shown have a 5% tolerance on nominal zener voltage. No suffix signifies a 10% tolerance, C signifies 2%, and D signifies 1% tolerance.
  - The Zener impedance is derived from the 60 Hz ac voltage, which results when an ac current having an rms value equal to 10% of the dc Zener current (I<sub>ZT</sub> or I<sub>ZK</sub>) is superimposed on I<sub>ZT</sub>. Zener impedance is measured at two points to insure a sharp knee on the breakdown curve and eliminate unstable units.
  - The reverse surge current is measured at 25 °C ambient using a square wave or equivalent sine wave pulse 1/120 second duration superimposed on I<sub>ZT</sub>.
  - Voltage at thermal equilibrium or 90 seconds after application of dc current.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View SMAJ4764CE3/TR13 on WIN SOURCE](#)
- ⊖ [Microchip Technology](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management