




**THE DATASHEET OF  
NB3L553DR2G**



# 2.5 V / 3.3 V / 5.0 V 1:4 Clock Fanout Buffer

## NB3L553



### Description

The NB3L553 is a low skew 1-to 4 clock fanout buffer, designed for clock distribution in mind. The NB3L553 specifically guarantees low output-to-output skew. Optimal design, layout and processing minimize skew within a device and from device to device.

### Features

- Input/Output Clock Frequency up to 200 MHz
- Low Skew Outputs (35 ps), Typical
- RMS Phase Jitter (12 kHz – 20 MHz): 29 fs (Typical)
- Output goes to Three-State Mode via OE
- Operating Range:  $V_{DD} = 2.375\text{ V to }5.25\text{ V}$
- 5 V Tolerant Input Clock  $I_{CLK}$
- Ideal for Networking Clocks
- Packaged in 8-pin SOIC
- Industrial Temperature Range
- These are Pb-Free Devices






Figure 1. Block Diagram

### MARKING DIAGRAM




- 3L553 = Specific Device Code
- A = Assembly Location
- L = Wafer Lot
- Y = Year
- W = Work Week
- = Pb-Free Package



- 6P = Specific Device Code
  - M = Date Code
  - = Pb-Free Package
- (Note: Microdot may be in either location)

\*For additional marking information, refer to Application Note [AND8002/D](#).

### PINOUT DIAGRAM



### ORDERING INFORMATION

| Device       | Package          | Shipping†        |
|--------------|------------------|------------------|
| NB3L553DG    | SOIC-8 (Pb-Free) | 98 Units/Rail    |
| NB3L553DR2G  | SOIC-8 (Pb-Free) | 2500/Tape & Reel |
| NB3L553MNR4G | DFN-8 (Pb-Free)  | 1000/Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

# NB3L553

**Table 1. OE, OUTPUT ENABLE FUNCTION**

| OE | Function |
|----|----------|
| 0  | Disable  |
| 1  | Enable   |

**Table 2. PIN DESCRIPTION**

| Pin # | Name             | Type                    | Description   |
|-------|------------------|-------------------------|---|
| 1     | V <sub>DD</sub>  | Power                   | Positive supply voltage (2.375 V to 5.25 V)   |
| 2     | Q0               | (LV)CMOS/(LV)TTL Output | Clock Output 0  |
| 3     | Q1               | (LV)CMOS/(LV)TTL Output | Clock Output 1  |
| 4     | GND              | Power                   | Negative supply voltage; Connect to ground, 0 V   |
| 5     | I <sub>CLK</sub> | (LV)CMOS Input          | Clock Input. 5.0 V tolerant   |
| 6     | Q2               | (LV)CMOS/(LV)TTL Output | Clock Output 2  |
| 7     | Q3               | (LV)CMOS/(LV)TTL Output | Clock Output 3  |
| 8     | OE               | (LV)TTL Input           | V <sub>DD</sub> for normal operation. Pin has no internal pullup or pull down resistor for open condition default. Use from 1 to 10 kOhms external resistor to force an open condition default state. |
| -     | EP               | Thermal Exposed Pad     | (DFN8 only) Thermal exposed pad must be connected to a sufficient thermal conduit. Electrically connect to the most negative supply (GND) or leave unconnected, floating open.                        |

# NB3L553

**Table 3. MAXIMUM RATINGS**

| Symbol           | Parameter                                   | Condition 1            | Condition 2  | Rating  | Unit         |
|------------------|---|------------------------|--|---|--------------|
| V <sub>DD</sub>  | Positive Power Supply                       | GND = 0 V              | –  | 6.0   | V            |
| V <sub>I</sub>   | Input Voltage                               | OE<br>I <sub>CLK</sub> | GND = 0 V and<br>V <sub>DD</sub> = 2.375 V to 5.25 V | GND – 0.5 ≤ V <sub>I</sub> ≤ V <sub>DD</sub> + 0.5<br>GND – 0.5 ≤ V <sub>I</sub> ≤ 5.75 | V            |
| T <sub>A</sub>   | Operating Temperature Range,<br>Industrial  | –                      | –  | ≥ –40 to ≤ +85  | °C           |
| T <sub>stg</sub> | Storage Temperature Range                   | –                      | –  | –65 to +150   | °C           |
| θ <sub>JA</sub>  | Thermal Resistance<br>(Junction–to–Ambient) | 0 lfpm<br>500 lfpm     | SOIC–8   | 190<br>130  | °C/W<br>°C/W |
| θ <sub>JC</sub>  | Thermal Resistance (Junction–to–Case)       | (Note 1)               | SOIC–8   | 41 to 44  | °C/W         |
| θ <sub>JA</sub>  | Thermal Resistance<br>(Junction–to–Ambient) | 0 lfpm<br>500 lfpm     | DFN8<br>DFN8   | 129<br>84   | °C/W<br>°C/W |
| θ <sub>JC</sub>  | Thermal Resistance (Junction–to–Case)       | (Note 1)               | DFN8   | 35 to 40  | °C/W         |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. JEDEC standard multilayer board – 2S2P (2 signal, 2 power)

**Table 4. ATTRIBUTES**

| Characteristic  | Value   |
|---|---|
| ESD Protection  | Human Body Model > 2 kV<br>Machine Model > 150 V<br>Charged Device Model > 2 kV |
| Moisture Sensitivity, Indefinite Time Out of Drypack (Note 2) | Level 1   |
| Flammability Rating   | Oxygen Index: 28 to 34<br>UL–94 code V–0 @ 0.125 in                             |
| Transistor Count  | 531 Devices   |
| Meets or Exceeds JEDEC Standard EIA/JESD78 IC Latchup Test    |   |

2. For additional Moisture Sensitivity information, refer to Application Note [AND8003/D](#).

# NB3L553

**Table 5. DC CHARACTERISTICS** ( $V_{DD} = 2.375\text{ V to }2.625\text{ V}$ ,  $GND = 0\text{ V}$ ,  $T_A = -40^\circ\text{C to }+85^\circ\text{C}$ ) (Note 3)

| Symbol            | Characteristic                                 | Min                     | Typ      | Max                     | Unit     |
|-------------------|--|-------------------------|----------|-------------------------|----------|
| $I_{DD}$          | Power Supply Current @ 135 MHz, No Load        | -                       | 25       | 30                      | mA       |
| $V_{OH}$          | Output HIGH Voltage – $I_{OH} = -16\text{ mA}$ | 1.7                     | -        | -                       | V        |
| $V_{OL}$          | Output LOW Voltage – $I_{OL} = 16\text{ mA}$   | -                       | -        | 0.4                     | V        |
| $V_{IH}, I_{CLK}$ | Input HIGH Voltage, $I_{CLK}$                  | $(V_{DD} \div 2) + 0.5$ | -        | 5.0                     | V        |
| $V_{IL}, I_{CLK}$ | Input LOW Voltage, $I_{CLK}$                   | -                       | -        | $(V_{DD} \div 2) - 0.5$ | V        |
| $V_{IH}, OE$      | Input HIGH Voltage, OE                         | 1.8                     | -        | $V_{DD}$                | V        |
| $V_{IL}, OE$      | Input LOW Voltage, OE                          | -                       | -        | 0.7                     | V        |
| ZO                | Nominal Output Impedance                       | -                       | 20       | -                       | $\Omega$ |
| CIN               | Input Capacitance, $I_{CLK}$ , OE              | -                       | 5.0      | -                       | pF       |
| IOS               | Short Circuit Current                          | -                       | $\pm 28$ | -                       | mA       |

**DC CHARACTERISTICS** ( $V_{DD} = 3.15\text{ V to }3.45\text{ V}$ ,  $GND = 0\text{ V}$ ,  $T_A = -40^\circ\text{C to }+85^\circ\text{C}$ ) (Note 3)

| Symbol            | Characteristic  | Min                     | Typ      | Max                     | Unit     |
|-------------------|---|-------------------------|----------|-------------------------|----------|
| $I_{DD}$          | Power Supply Current @ 135 MHz, No Load                     | -                       | 35       | 40                      | mA       |
| $V_{OH}$          | Output HIGH Voltage – $I_{OH} = -25\text{ mA}$              | 2.4                     | -        | -                       | V        |
| $V_{OL}$          | Output LOW Voltage – $I_{OL} = 25\text{ mA}$                | -                       | -        | 0.4                     | V        |
| $V_{OH}$          | Output HIGH Voltage – $I_{OH} = -12\text{ mA}$ (CMOS level) | $V_{DD} - 0.4$          | -        | -                       | V        |
| $V_{IH}, I_{CLK}$ | Input HIGH Voltage, $I_{CLK}$                               | $(V_{DD} \div 2) + 0.7$ | -        | 5.0                     | V        |
| $V_{IL}, I_{CLK}$ | Input LOW Voltage, $I_{CLK}$                                | -                       | -        | $(V_{DD} \div 2) - 0.7$ | V        |
| $V_{IH}, OE$      | Input HIGH Voltage, OE                                      | 2.0                     | -        | $V_{DD}$                | V        |
| $V_{IL}, OE$      | Input LOW Voltage, OE                                       | 0                       | -        | 0.8                     | V        |
| ZO                | Nominal Output Impedance                                    | -                       | 20       | -                       | $\Omega$ |
| CIN               | Input Capacitance, OE                                       | -                       | 5.0      | -                       | pF       |
| IOS               | Short Circuit Current                                       | -                       | $\pm 50$ | -                       | mA       |

**DC CHARACTERISTICS** ( $V_{DD} = 4.75\text{ V to }5.25\text{ V}$ ,  $GND = 0\text{ V}$ ,  $T_A = -40^\circ\text{C to }+85^\circ\text{C}$ ) (Note 3)

| Symbol            | Characteristic  | Min                   | Typ      | Max                   | Unit     |
|-------------------|---|-----------------------|----------|-----------------------|----------|
| $I_{DD}$          | Power Supply Current @ 135 MHz, – No Load                   | -                     | 45       | 85                    | mA       |
| $V_{OH}$          | Output HIGH Voltage – $I_{OH} = -35\text{ mA}$              | 2.4                   | -        | -                     | V        |
| $V_{OL}$          | Output LOW Voltage – $I_{OL} = 35\text{ mA}$                | -                     | -        | 0.4                   | V        |
| $V_{OH}$          | Output HIGH Voltage – $I_{OH} = -12\text{ mA}$ (CMOS level) | $V_{DD} - 0.4$        | -        | -                     | V        |
| $V_{IH}, I_{CLK}$ | Input HIGH Voltage, $I_{CLK}$                               | $(V_{DD} \div 2) + 1$ | -        | 5.0                   | V        |
| $V_{IL}, I_{CLK}$ | Input LOW Voltage, $I_{CLK}$                                | -                     | -        | $(V_{DD} \div 2) - 1$ | V        |
| $V_{IH}, OE$      | Input HIGH Voltage, OE                                      | 2.0                   | -        | $V_{DD}$              | V        |
| $V_{IL}, OE$      | Input LOW Voltage, OE                                       | -                     | -        | 0.8                   | V        |
| ZO                | Nominal Output Impedance                                    | -                     | 20       | -                     | $\Omega$ |
| CIN               | Input Capacitance, OE                                       | -                     | 5.0      | -                     | pF       |
| IOS               | Short Circuit Current                                       | -                     | $\pm 80$ | -                     | mA       |

# NB3L553

**Table 6. AC CHARACTERISTICS;  $V_{DD} = 2.5\text{ V} \pm 5\%$**  ( $V_{DD} = 2.375\text{ V}$  to  $2.625\text{ V}$ ,  $GND = 0\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ ) (Note 3)

| Symbol     | Characteristic                             | Min | Typ | Max | Unit |
|------------|--|-----|-----|-----|------|
| $f_{in}$   | Input Frequency                            | –   | –   | 200 | MHz  |
| $t_r/t_f$  | Output rise and fall times; 0.8 V to 2.0 V | –   | 1.0 | 1.5 | ns   |
| $t_{pd}$   | Propagation Delay, CLK to $Q_n$ (Note 4)   | 2.2 | 3.0 | 5.0 | ns   |
| $t_{skew}$ | Output-to-output skew; (Note 5)            | –   | 35  | 50  | ps   |
| $t_{skew}$ | Device-to-device skew, (Note 5)            | –   | –   | 500 | ps   |

**AC CHARACTERISTICS;  $V_{DD} = 3.3\text{ V} \pm 5\%$**  ( $V_{DD} = 3.15\text{ V}$  to  $3.45\text{ V}$ ,  $GND = 0\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ ) (Note 3)

| Symbol             | Characteristic  | Conditions                     | Min | Typ | Max | Unit |
|--------------------|---|--------------------------------|-----|-----|-----|------|
| $f_{in}$           | Input Frequency   |                                | –   | –   | 200 | MHz  |
| $t_{jitter}(\phi)$ | RMS Phase Jitter (Integrated 12 kHz – 20 MHz) (See Figures 2 and 3) | $f_{carrier} = 100\text{ MHz}$ | –   | 18  | –   | fs   |
| $t_r/t_f$          | Output rise and fall times; 0.8 V to 2.0 V                          |                                | –   | 0.6 | 1.0 | ns   |
| $t_{pd}$           | Propagation Delay, CLK to $Q_n$ (Note 4)                            |                                | 2.0 | 2.4 | 4.0 | ns   |
| $t_{skew}$         | Output-to-output skew; (Note 5)                                     |                                | –   | 35  | 50  | ps   |
| $t_{skew}$         | Device-to-device skew, (Note 5)                                     |                                | –   | –   | 500 | ps   |

**AC CHARACTERISTICS;  $V_{DD} = 5.0\text{ V} \pm 5\%$**  ( $V_{DD} = 4.75\text{ V}$  to  $5.25\text{ V}$ ,  $GND = 0\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ ) (Note 3)

| Symbol             | Characteristic  | Min | Min                            | Typ | Max | Unit |
|--------------------|---|-----|--------------------------------|-----|-----|------|
| $f_{in}$           | Input Frequency   |     | –                              | –   | 200 | MHz  |
| $t_{jitter}(\phi)$ | RMS Phase Jitter (Integrated 12 kHz – 20 MHz) (See Figures 2 and 3) |     | $f_{carrier} = 100\text{ MHz}$ | 29  | –   | fs   |
| $t_r/t_f$          | Output rise and fall times; 0.8 V to 2.0 V                          |     | –                              | 0.3 | 0.7 | ns   |
| $t_{pd}$           | Propagation Delay, CLK to $Q_n$ (Note 4)                            |     | 1.7                            | 2.5 | 4.0 | ns   |
| $t_{skew}$         | Output-to-output skew; (Note 5)                                     |     | –                              | 35  | 50  | ps   |
| $t_{skew}$         | Device-to-device skew, (Note 5)                                     |     | –                              | –   | 500 | ps   |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

3. Outputs loaded with external  $R_L = 33\ \Omega$  series resistor and  $C_L = 15\text{ pF}$  to GND. Duty cycle out = duty in. A  $0.01\ \mu\text{F}$  decoupling capacitor should be connected between  $V_{DD}$  and GND.
4. Measured with rail-to-rail input clock
5. Measured on rising edges at  $V_{DD} \div 2$  between any two outputs with equal loading.

# NB3L553

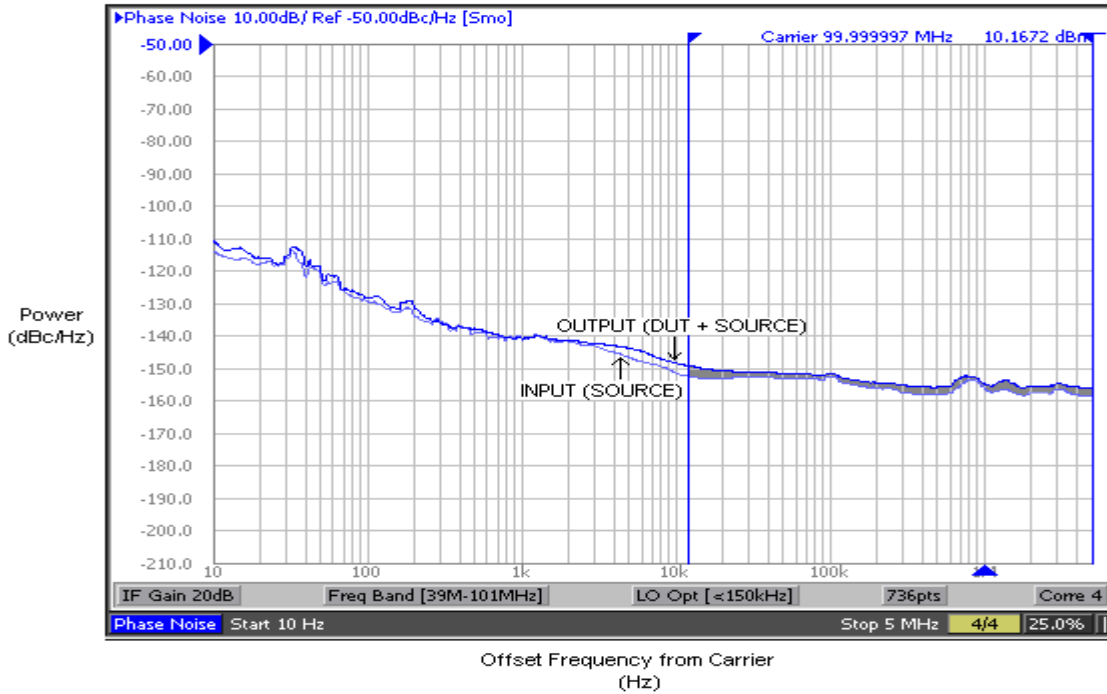


Figure 2. Phase Noise Plot at 100 MHz at an Operating Voltage of 3.3 V, Room Temperature

The above plot captured using Agilent E5052A shows Additive Phase Noise of the NB3L553 device measured with an input source generated by Agilent E8663B. The RMS phase jitter contributed by the device (integrated between 12 kHz to 20 MHz; as shown in the shaded area) is 18 fs (RMS Phase Jitter of the input source is 75.40 fs and Output (DUT+Source) is 93.16 fs).


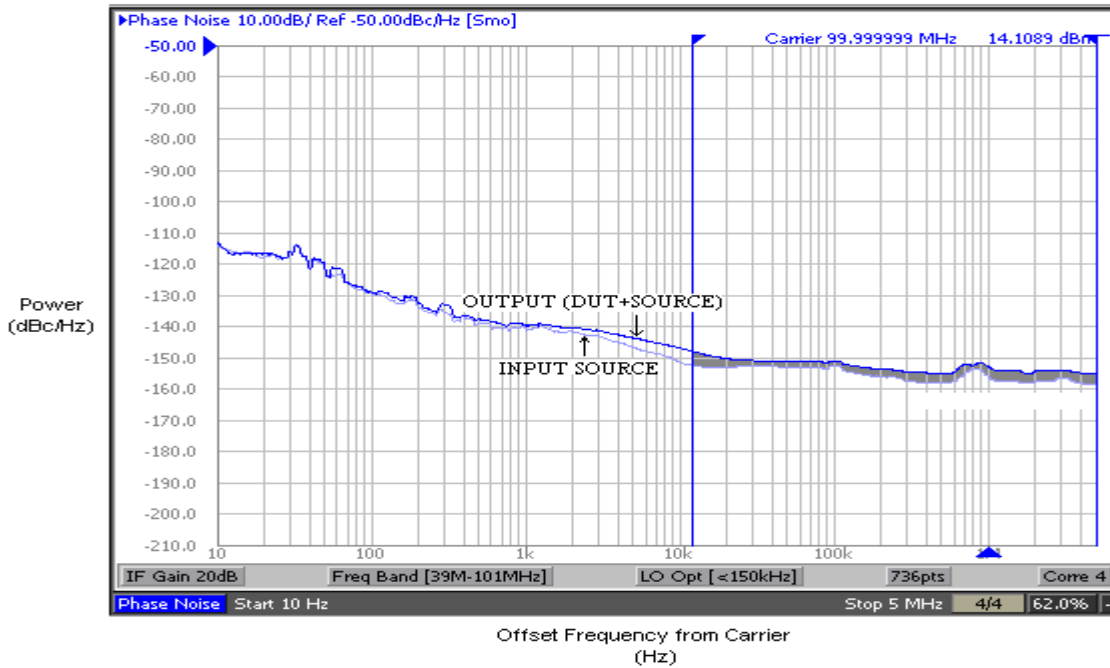


Figure 3. Phase Noise Plot at 100 MHz at an Operating Voltage of 5 V, Room Temperature

The above plot captured using Agilent E5052A shows Additive Phase Noise of the NB3L553 device measured with an input source generated by Agilent E8663B. The RMS phase jitter contributed by the device (integrated between 12 kHz to 20 MHz; as shown in the shaded area) is 29 fs (RMS Phase Jitter of the input source is 75.40 fs and Output (DUT+Source) is 103.85 fs).



# MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS



SCALE 4:1

DFN8 2x2, 0.5P  
CASE 506AA  
ISSUE F

DATE 04 MAY 2016

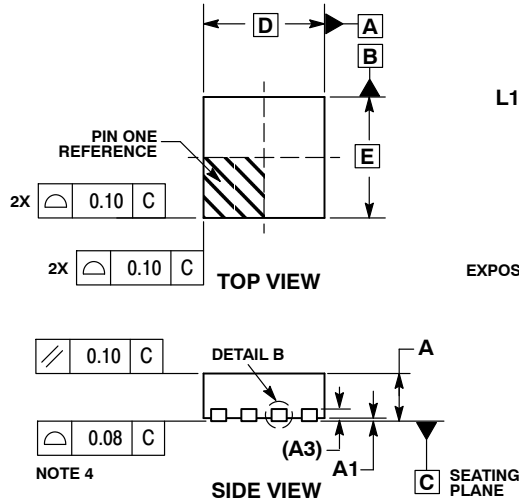


NOTES:


1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994 .
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.20 MM FROM TERMINAL TIP.
4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

| MILLIMETERS |          |      |
|-------------|----------|------|
| DIM         | MIN      | MAX  |
| A           | 0.80     | 1.00 |
| A1          | 0.00     | 0.05 |
| A3          | 0.20 REF |      |
| b           | 0.20     | 0.30 |
| D           | 2.00 BSC |      |
| D2          | 1.10     | 1.30 |
| E           | 2.00 BSC |      |
| E2          | 0.70     | 0.90 |
| e           | 0.50 BSC |      |
| K           | 0.30 REF |      |
| L           | 0.25     | 0.35 |
| L1          | ---      | 0.10 |


### RECOMMENDED SOLDERING FOOTPRINT\*

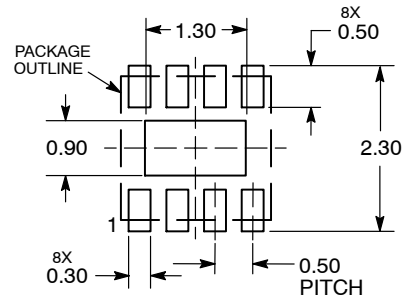

DIMENSIONS: MILLIMETERS

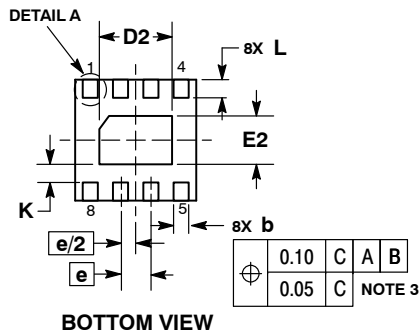

### GENERIC MARKING DIAGRAM\*



- XX = Specific Device Code
- M = Date Code
- = Pb-Free Device

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

|                  |                            |  |
|------------------|----------------------------|--|
| DOCUMENT NUMBER: | 98AON18658D                | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | DFN8, 2.0X2.0, 0.5MM PITCH | PAGE 1 OF 1  |

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

# MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS



SCALE 1:1

SOIC-8 NB  
CASE 751-07  
ISSUE AK

DATE 16 FEB 2011





- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
  4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
  5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.
  6. 751-01 THRU 751-06 ARE OBSOLETE. NEW STANDARD IS 751-07.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 4.80        | 5.00 | 0.189     | 0.197 |
| B   | 3.80        | 4.00 | 0.150     | 0.157 |
| C   | 1.35        | 1.75 | 0.053     | 0.069 |
| D   | 0.33        | 0.51 | 0.013     | 0.020 |
| G   | 1.27 BSC    |      | 0.050 BSC |       |
| H   | 0.10        | 0.25 | 0.004     | 0.010 |
| J   | 0.19        | 0.25 | 0.007     | 0.010 |
| K   | 0.40        | 1.27 | 0.016     | 0.050 |
| M   | 0°          | 8°   | 0°        | 8°    |
| N   | 0.25        | 0.50 | 0.010     | 0.020 |
| S   | 5.80        | 6.20 | 0.228     | 0.244 |

## GENERIC MARKING DIAGRAM\*

### SOLDERING FOOTPRINT\*

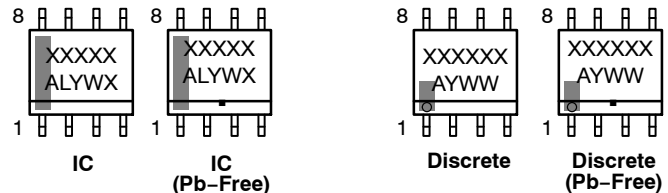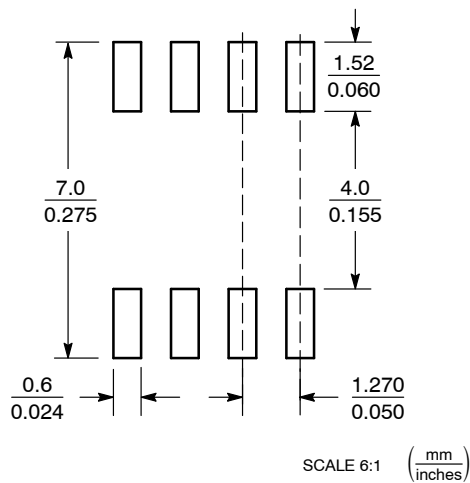

XXXXX = Specific Device Code  
 A = Assembly Location  
 L = Wafer Lot  
 Y = Year  
 W = Work Week  
 ■ = Pb-Free Package

XXXXXX = Specific Device Code  
 A = Assembly Location  
 Y = Year  
 WW = Work Week  
 ■ = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

## STYLES ON PAGE 2

|                  |             |  |
|------------------|-------------|--|
| DOCUMENT NUMBER: | 98ASB42564B | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | SOIC-8 NB   | PAGE 1 OF 2  |

onsemi and ONsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**SOIC-8 NB**  
**CASE 751-07**  
**ISSUE AK**

DATE 16 FEB 2011

- |   |  |  |  |
|---|--|--|--|
| <p>STYLE 1:<br/>         PIN 1. EMITTER<br/>         2. COLLECTOR<br/>         3. COLLECTOR<br/>         4. EMITTER<br/>         5. EMITTER<br/>         6. BASE<br/>         7. BASE<br/>         8. EMITTER</p>   | <p>STYLE 2:<br/>         PIN 1. COLLECTOR, DIE, #1<br/>         2. COLLECTOR, #1<br/>         3. COLLECTOR, #2<br/>         4. COLLECTOR, #2<br/>         5. BASE, #2<br/>         6. EMITTER, #2<br/>         7. BASE, #1<br/>         8. EMITTER, #1</p>               | <p>STYLE 3:<br/>         PIN 1. DRAIN, DIE #1<br/>         2. DRAIN, #1<br/>         3. DRAIN, #2<br/>         4. DRAIN, #2<br/>         5. GATE, #2<br/>         6. SOURCE, #2<br/>         7. GATE, #1<br/>         8. SOURCE, #1</p>                            | <p>STYLE 4:<br/>         PIN 1. ANODE<br/>         2. ANODE<br/>         3. ANODE<br/>         4. ANODE<br/>         5. ANODE<br/>         6. ANODE<br/>         7. ANODE<br/>         8. COMMON CATHODE</p>   |
| <p>STYLE 5:<br/>         PIN 1. DRAIN<br/>         2. DRAIN<br/>         3. DRAIN<br/>         4. DRAIN<br/>         5. GATE<br/>         6. GATE<br/>         7. SOURCE<br/>         8. SOURCE</p>   | <p>STYLE 6:<br/>         PIN 1. SOURCE<br/>         2. DRAIN<br/>         3. DRAIN<br/>         4. SOURCE<br/>         5. SOURCE<br/>         6. GATE<br/>         7. GATE<br/>         8. SOURCE</p>  | <p>STYLE 7:<br/>         PIN 1. INPUT<br/>         2. EXTERNAL BYPASS<br/>         3. THIRD STAGE SOURCE<br/>         4. GROUND<br/>         5. DRAIN<br/>         6. GATE 3<br/>         7. SECOND STAGE Vd<br/>         8. FIRST STAGE Vd</p>                    | <p>STYLE 8:<br/>         PIN 1. COLLECTOR, DIE #1<br/>         2. BASE, #1<br/>         3. BASE, #2<br/>         4. COLLECTOR, #2<br/>         5. COLLECTOR, #2<br/>         6. EMITTER, #2<br/>         7. EMITTER, #1<br/>         8. COLLECTOR, #1</p>                              |
| <p>STYLE 9:<br/>         PIN 1. EMITTER, COMMON<br/>         2. COLLECTOR, DIE #1<br/>         3. COLLECTOR, DIE #2<br/>         4. EMITTER, COMMON<br/>         5. EMITTER, COMMON<br/>         6. BASE, DIE #2<br/>         7. BASE, DIE #1<br/>         8. EMITTER, COMMON</p> | <p>STYLE 10:<br/>         PIN 1. GROUND<br/>         2. BIAS 1<br/>         3. OUTPUT<br/>         4. GROUND<br/>         5. GROUND<br/>         6. BIAS 2<br/>         7. INPUT<br/>         8. GROUND</p>  | <p>STYLE 11:<br/>         PIN 1. SOURCE 1<br/>         2. GATE 1<br/>         3. SOURCE 2<br/>         4. GATE 2<br/>         5. DRAIN 2<br/>         6. DRAIN 2<br/>         7. DRAIN 1<br/>         8. DRAIN 1</p>   | <p>STYLE 12:<br/>         PIN 1. SOURCE<br/>         2. SOURCE<br/>         3. SOURCE<br/>         4. GATE<br/>         5. DRAIN<br/>         6. DRAIN<br/>         7. DRAIN<br/>         8. DRAIN</p>   |
| <p>STYLE 13:<br/>         PIN 1. N.C.<br/>         2. SOURCE<br/>         3. SOURCE<br/>         4. GATE<br/>         5. DRAIN<br/>         6. DRAIN<br/>         7. DRAIN<br/>         8. DRAIN</p>  | <p>STYLE 14:<br/>         PIN 1. N-SOURCE<br/>         2. N-GATE<br/>         3. P-SOURCE<br/>         4. P-GATE<br/>         5. P-DRAIN<br/>         6. P-DRAIN<br/>         7. N-DRAIN<br/>         8. N-DRAIN</p>   | <p>STYLE 15:<br/>         PIN 1. ANODE 1<br/>         2. ANODE 1<br/>         3. ANODE 1<br/>         4. ANODE 1<br/>         5. CATHODE, COMMON<br/>         6. CATHODE, COMMON<br/>         7. CATHODE, COMMON<br/>         8. CATHODE, COMMON</p>               | <p>STYLE 16:<br/>         PIN 1. EMITTER, DIE #1<br/>         2. BASE, DIE #1<br/>         3. EMITTER, DIE #2<br/>         4. BASE, DIE #2<br/>         5. COLLECTOR, DIE #2<br/>         6. COLLECTOR, DIE #2<br/>         7. COLLECTOR, DIE #1<br/>         8. COLLECTOR, DIE #1</p> |
| <p>STYLE 17:<br/>         PIN 1. VCC<br/>         2. V2OUT<br/>         3. V1OUT<br/>         4. TXE<br/>         5. RXE<br/>         6. VEE<br/>         7. GND<br/>         8. ACC</p>  | <p>STYLE 18:<br/>         PIN 1. ANODE<br/>         2. ANODE<br/>         3. SOURCE<br/>         4. GATE<br/>         5. DRAIN<br/>         6. DRAIN<br/>         7. CATHODE<br/>         8. CATHODE</p>   | <p>STYLE 19:<br/>         PIN 1. SOURCE 1<br/>         2. GATE 1<br/>         3. SOURCE 2<br/>         4. GATE 2<br/>         5. DRAIN 2<br/>         6. MIRROR 2<br/>         7. DRAIN 1<br/>         8. MIRROR 1</p>   | <p>STYLE 20:<br/>         PIN 1. SOURCE (N)<br/>         2. GATE (N)<br/>         3. SOURCE (P)<br/>         4. GATE (P)<br/>         5. DRAIN<br/>         6. DRAIN<br/>         7. DRAIN<br/>         8. DRAIN</p>   |
| <p>STYLE 21:<br/>         PIN 1. CATHODE 1<br/>         2. CATHODE 2<br/>         3. CATHODE 3<br/>         4. CATHODE 4<br/>         5. CATHODE 5<br/>         6. COMMON ANODE<br/>         7. COMMON ANODE<br/>         8. CATHODE 6</p>  | <p>STYLE 22:<br/>         PIN 1. I/O LINE 1<br/>         2. COMMON CATHODE/VCC<br/>         3. COMMON CATHODE/VCC<br/>         4. I/O LINE 3<br/>         5. COMMON ANODE/GND<br/>         6. I/O LINE 4<br/>         7. I/O LINE 5<br/>         8. COMMON ANODE/GND</p> | <p>STYLE 23:<br/>         PIN 1. LINE 1 IN<br/>         2. COMMON ANODE/GND<br/>         3. COMMON ANODE/GND<br/>         4. LINE 2 IN<br/>         5. LINE 2 OUT<br/>         6. COMMON ANODE/GND<br/>         7. COMMON ANODE/GND<br/>         8. LINE 1 OUT</p> | <p>STYLE 24:<br/>         PIN 1. BASE<br/>         2. EMITTER<br/>         3. COLLECTOR/ANODE<br/>         4. COLLECTOR/ANODE<br/>         5. CATHODE<br/>         6. CATHODE<br/>         7. COLLECTOR/ANODE<br/>         8. COLLECTOR/ANODE</p>                                      |
| <p>STYLE 25:<br/>         PIN 1. VIN<br/>         2. N/C<br/>         3. REXT<br/>         4. GND<br/>         5. IOUT<br/>         6. IOUT<br/>         7. IOUT<br/>         8. IOUT</p>   | <p>STYLE 26:<br/>         PIN 1. GND<br/>         2. dv/dt<br/>         3. ENABLE<br/>         4. ILIMIT<br/>         5. SOURCE<br/>         6. SOURCE<br/>         7. SOURCE<br/>         8. VCC</p>  | <p>STYLE 27:<br/>         PIN 1. ILIMIT<br/>         2. OVLO<br/>         3. UVLO<br/>         4. INPUT+<br/>         5. SOURCE<br/>         6. SOURCE<br/>         7. SOURCE<br/>         8. DRAIN</p>  | <p>STYLE 28:<br/>         PIN 1. SW_TO_GND<br/>         2. DASIC_OFF<br/>         3. DASIC_SW_DET<br/>         4. GND<br/>         5. V_MON<br/>         6. VBULK<br/>         7. VBULK<br/>         8. VIN</p>  |
| <p>STYLE 29:<br/>         PIN 1. BASE, DIE #1<br/>         2. EMITTER, #1<br/>         3. BASE, #2<br/>         4. EMITTER, #2<br/>         5. COLLECTOR, #2<br/>         6. COLLECTOR, #2<br/>         7. COLLECTOR, #1<br/>         8. COLLECTOR, #1</p>                        | <p>STYLE 30:<br/>         PIN 1. DRAIN 1<br/>         2. DRAIN 1<br/>         3. GATE 2<br/>         4. SOURCE 2<br/>         5. SOURCE 1/DRAIN 2<br/>         6. SOURCE 1/DRAIN 2<br/>         7. SOURCE 1/DRAIN 2<br/>         8. GATE 1</p>                           |  |  |

|                         |                    |   |
|-------------------------|--------------------|---|
| <b>DOCUMENT NUMBER:</b> | <b>98ASB42564B</b> | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>SOIC-8 NB</b>   | <b>PAGE 2 OF 2</b>  |

**onsemi** and **ONSEMI** are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

---

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at [www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View NB3L553DR2G on WIN SOURCE](#)

 [ON Semiconductor](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management