



THE DATASHEET OF
QCS-83+



2 Way-90° Power Splitter

QCS-83+

50Ω 4000 to 8000 MHz



CASE STYLE: GE0805C-1

The Big Deal

- High Power handling (15W)
- Low Unbalance, 0.8 dB & 4 deg. typ.
- Industry leading combination of size/bandwidth

Product Overview

Mini-Circuits new 90° Power Splitter, model: QCS-83+, offers an industry leading combination of operating bandwidth and size; supporting nearly an octave band in a miniature EIA-0805 form factor. The outstanding phase and amplitude unbalance make this component a versatile building block for use in a variety of systems and sub-system designs.

Key Features

| Feature | Advantages |
|-----------------------------------|---|
| Small Size | Offered in the EIA-0805 package size, the QCS-83+ offers an industry leading combination of size, bandwidth and frequency. The small footprint (2.0mm x 1.25mm) allows for reduced parasitics in systems with improved performance and simplified layout. |
| Low Phase and Amplitude Unbalance | Supporting 4 deg. and 0.8 dB unbalance make this 90° hybrid applicable for use in higher level integrated components such as image reject mixers, single sideband modulators, phase shifters, variable attenuators, and balance amplifiers. |
| High Power Handling | Capable of operating up to 15W, the LTCC construction of the QCS-83+ makes this 90° hybrid a robust, rugged product that can be used effectively in either the transmit or receive paths. |

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Power Splitter/Combiner

QCS-83+

2 Way-90° 50Ω 4000 to 8000 MHz



Generic photo used for illustration purposes only
CASE STYLE: GE0805C-1

Maximum Ratings

| | |
|-----------------------------|----------------|
| Operating Temperature | -55°C to 100°C |
| Storage Temperature | -55°C to 100°C |
| Power Input (as a splitter) | 15W* max. |

*Derate linearly to 7W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

Pin Connections

| | |
|----------------------|-----|
| SUM PORT | 1 |
| PORT 1 (0°) | 4 |
| PORT 2 (+90°) | 6 |
| GROUND | 2,5 |
| 50 OHM TERM EXTERNAL | 3 |

Features

- Low insertion loss, 0.8 dB typ.
- Good isolation, 14 dB typ.
- Miniature size, 0.079"x0.049"x0.033"
- LTCC construction
- High power

Applications


- Balanced amplifiers
- Modulators
- DCS, PCS, UMTS
- WiMax
- WiFi • ISM
- Phase Shifter
- Attenuator
- Point to Point

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

| | |
|-----------|-----------------------------------|
| Reel Size | Devices/Reel |
| 7" | 20, 50, 100, 200, 500, 1000, 2000 |

Outline Drawing

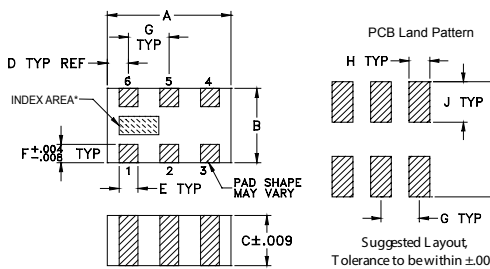


Outline Dimensions (inch/mm)

| | | | | | |
|------|------|------|------|------|-------|
| A | B | C | D | E | F |
| .079 | .049 | .033 | .014 | .012 | .012 |
| 2.01 | 1.24 | 0.84 | 0.36 | 0.30 | 0.30 |
| G | H | J | K | | wt |
| .026 | .014 | .039 | .110 | | grams |
| 0.66 | 0.36 | 1.00 | 2.80 | | .008 |


Electrical Specifications at 25°C

| Parameter | Frequency (MHz) | Min. | Typ. | Max. | Unit |
|--|-----------------|------|------|------|--------|
| Frequency | | 4000 | | 8000 | MHz |
| Insertion Loss (Avg. Of Coupled Outputs) above 3 dB | 4000-5000 | — | 0.7 | 1 | dB |
| | 5000-6000 | — | 0.7 | 1 | |
| | 6000-7000 | — | 0.8 | 1.1 | |
| | 7000-8000 | — | 1.1 | 1.5 | |
| Isolation | 4000-5000 | 13 | 16 | — | dB |
| | 5000-6000 | 13 | 16 | — | |
| | 6000-7000 | 16 | 19 | — | |
| | 7000-8000 | 13 | 16 | — | |
| Phase Unbalance | 4000-5000 | — | 3 | 6 | Degree |
| | 5000-6000 | — | 3 | 6 | |
| | 6000-7000 | — | 4 | 8 | |
| | 7000-8000 | — | 5 | 9 | |
| Amplitude Unbalance | 4000-5000 | — | 0.8 | 1.1 | dB |
| | 5000-6000 | — | 0.8 | 1.1 | |
| | 6000-7000 | — | 0.8 | 1.1 | |
| | 7000-8000 | — | 1.4 | 1.8 | |
| VSWR (Port-S) | 4000-8000 | — | 1.4 | 1.6 | :1 |
| VSWR (Port 1-2) | 4000-8000 | — | 1.4 | 2.0 | :1 |

Electrical Schematic

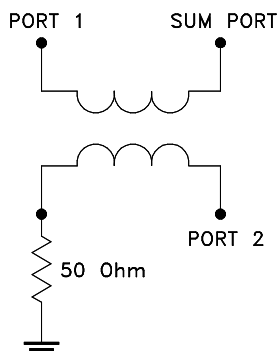

Demo Board MCL P/N: TB-489-802+ Suggested PCB Layout (PL-304)

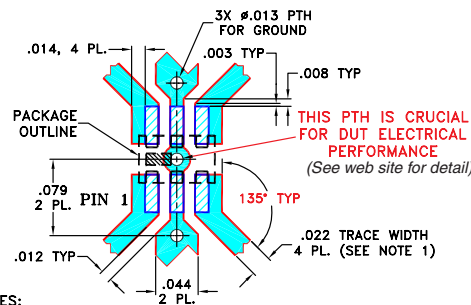

NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- ▨ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes




- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Typical Performance Data

| Frequency (MHz) | Total Loss ¹ (dB) | | Amplitude Unbalance (dB) | Isolation (dB) | Phase Unbalance (deg.) | VSWR S | VSWR 1 | VSWR 2 |
|-----------------|------------------------------|------|--------------------------|----------------|------------------------|--------|--------|--------|
| | S-1 | S-2 | | | | | | |
| 4000.00 | 3.51 | 4.15 | 0.22 | 16.82 | 91.24 | 1.34 | 1.29 | 1.28 |
| 4200.00 | 3.69 | 3.97 | 0.08 | 16.26 | 91.04 | 1.36 | 1.32 | 1.29 |
| 4500.00 | 3.89 | 3.74 | 0.43 | 15.85 | 90.62 | 1.36 | 1.36 | 1.30 |
| 4800.00 | 4.02 | 3.58 | 0.66 | 15.74 | 90.24 | 1.35 | 1.36 | 1.30 |
| 5000.00 | 4.06 | 3.49 | 0.74 | 15.95 | 90.11 | 1.33 | 1.35 | 1.28 |
| 5200.00 | 4.08 | 3.41 | 0.79 | 16.21 | 90.29 | 1.29 | 1.32 | 1.26 |
| 5500.00 | 4.08 | 3.31 | 0.81 | 17.14 | 90.85 | 1.24 | 1.25 | 1.23 |
| 5800.00 | 4.06 | 3.27 | 0.79 | 18.43 | 91.66 | 1.18 | 1.18 | 1.19 |
| 6000.00 | 4.07 | 3.30 | 0.78 | 19.71 | 92.25 | 1.14 | 1.13 | 1.16 |
| 6500.00 | 4.12 | 3.36 | 0.73 | 25.97 | 93.94 | 1.06 | 1.02 | 1.07 |
| 6800.00 | 4.09 | 3.39 | 0.65 | 37.16 | 94.21 | 1.01 | 1.07 | 1.02 |
| 7000.00 | 4.05 | 3.46 | 0.53 | 35.77 | 94.29 | 1.05 | 1.10 | 1.08 |
| 7500.00 | 3.85 | 3.84 | 0.07 | 20.77 | 94.11 | 1.15 | 1.16 | 1.31 |
| 7800.00 | 3.67 | 4.24 | 0.73 | 17.08 | 94.26 | 1.26 | 1.21 | 1.52 |
| 8000.00 | 3.55 | 4.55 | 1.31 | 15.41 | 94.99 | 1.36 | 1.28 | 1.70 |

1. Total Loss = Insertion Loss + 3dB splitter loss.

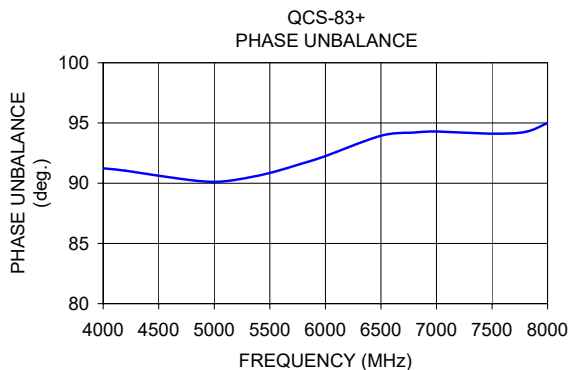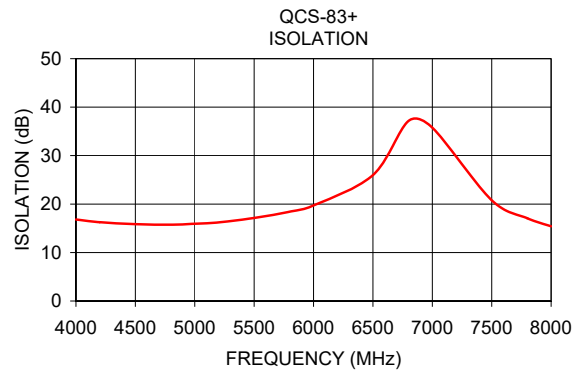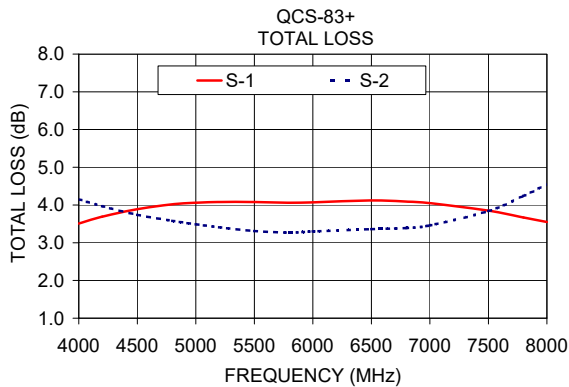


Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View QCS-83+ on WIN SOURCE](#)

 [Mini-Circuits Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management