

TLP281, TLP281-4


**PROGRAMMABLE CONTROLLERS
AC/DC-INPUT MODULE
PC CARD MODEM(PCMCIA)**

TLP281 and TLP281-4 is a very small and thin coupler, suitable for surface mount assembly in applications such as PCMCIA Fax modem, programmable controllers.

TLP281 and TLP281-4 consist of photo transistor, optically coupled to a gallium arsenide infrared emitting diode.


- Collector-Emitter Voltage : 80 V (min)
- Current Transfer Ratio : 50% (min)
Rank GB : 100% (min)
- Isolation Voltage : 2500 Vrms (min)
- UL Recognized : UL1577, File No. E67349
- BSI Approved : BS EN 60065: 2002,
: BS EN 60950-1: 2002
Certificate No. 8143, 8144

Unit: mm

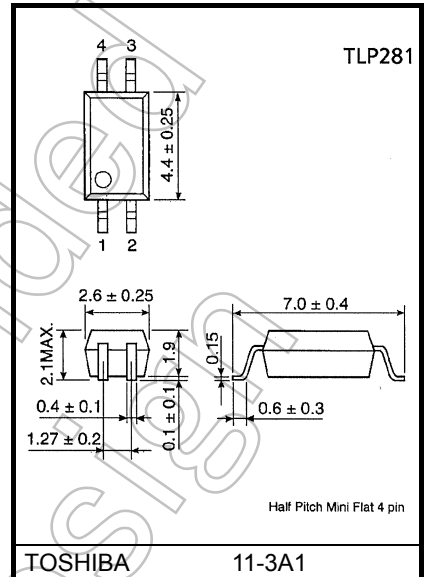


Weight: 0.05 g (typ.)

Pin Configuration (top view)




1: ANODE
2: CATHODE
3: EMITTER
4: COLLECTOR

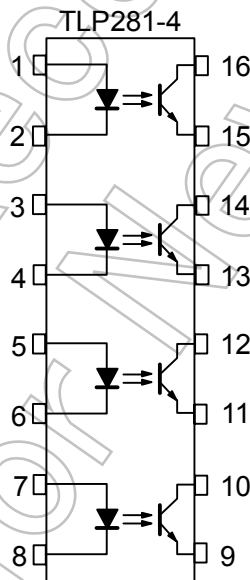

1,3,5,7 : ANODE
2,4,6,8 : CATHODE
9,11,13,15 : EMITTER
10,12,14,16 : COLLECTOR

Unit: mm

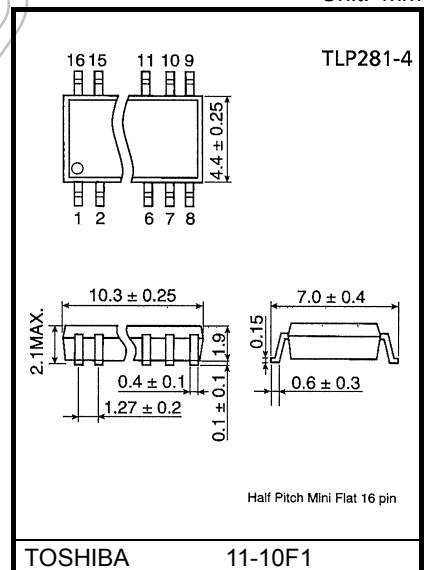

Weight: 0.19 g (typ.)

Start of commercial production
1996/03

Current Transfer Ratio

| TYPE | Classification(*1) | Current Transfer Ratio (%) (I_C / I_F) | | Marking of Classification |
|----------|--------------------|--|-----|---|
| | | $I_F = 5 \text{ mA}, V_{CE} = 5 \text{ V}, T_a = 25^\circ\text{C}$ | | |
| | | Min | Max | |
| TLP281 | Blank | 50 | 600 | Blank, Y [■] , YE, G, G [■] , GR, B, BL, GB |
| | Rank Y | 50 | 150 | YE |
| | Rank GR | 100 | 300 | GR |
| | Rank BL | 200 | 600 | BL |
| | Rank GB | 100 | 600 | GB |
| | Rank YH | 75 | 150 | Y [■] |
| | Rank GRL | 100 | 200 | G |
| | Rank GRH | 150 | 300 | G [■] |
| | Rank BLL | 200 | 400 | B |
| TLP281-4 | Blank | 50 | 600 | Blank, GB |
| | Rank GB | 100 | 600 | GB |

*1: Ex. rank GB: TLP281 (GB)

(Note): Application type name for certification test, please use standard product type name, i.e.

TLP281 (GB): TLP281, TLP281-4 (GB): TLP281-4

Not Recommended for New Design

Absolute Maximum Ratings (Ta = 25°C)

| CHARACTERISTIC | | SYMBOL | RATING | | UNIT |
|---|---|-------------------------------|---------------------------------|-----------------------|---------|
| | | | TLP281 | TLP281-4 | |
| LED | Forward Current | I_F | 50 | | mA |
| | Forward Current Derating | $\Delta I_F / ^\circ\text{C}$ | -0.7 (Ta \geq 53°C) | -0.5 (Ta \geq 25°C) | mA / °C |
| | Pulse Forward Current (Note 1) | I_{FP} | 1 | | A |
| | Reverse Voltage | V_R | 5 | | V |
| | Junction Temperature | T_j | 125 | | °C |
| DETECTOR | Collector-Emitter Voltage | V_{CEO} | 80 | | V |
| | Emitter-Collector Voltage | V_{ECO} | 7 | | V |
| | Collector Current | I_C | 50 | | mA |
| | Collector Power Dissipation (1 Circuit) | P_C | 150 | 100 | mW |
| | Collector Power Dissipation Derating (Ta \geq 25°C) (1 Circuit) | $\Delta P_C / ^\circ\text{C}$ | -1.5 | -1.0 | mW / °C |
| | Junction Temperature | T_j | 125 | | °C |
| Operating Temperature Range | | T_{opr} | -55 to 100 | | °C |
| Storage Temperature Range | | T_{stg} | -55 to 125 | | °C |
| Lead Soldering Temperature | | T_{sol} | 260 (10s) | | °C |
| Total Package Power Dissipation (1 Circuit) | | P_T | 200 | 170 | mW |
| Total Package Power Dissipation Derating (Ta \geq 25°C) (1 Circuit) | | $\Delta P_T / ^\circ\text{C}$ | -2.0 | -1.7 | mW / °C |
| Isolation Voltage (Note 2) | | BV_S | 2500(AC, 1min, R.H. \leq 60%) | | Vrms |

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

(Note 1) Pulse width \leq 100 μ s, frequency 100Hz

(Note 2) AC, 1 minute, R.H. \leq 60%, Device considered a two terminal device : LED side pins shorted together and DETECTOR side pins shorted together.

Individual Electrical Characteristics (Ta = 25°C)

| CHARACTERISTIC | | SYMBOL | TEST CONDITION | MIN | TYP. | MAX | UNIT |
|---------------------------------------|-------------------------------------|----------------------------|---|-----|------|-----|---------------|
| LED | Forward Voltage | V_F | $I_F = 10 \text{ mA}$ | 1.0 | 1.15 | 1.3 | V |
| | Reverse Current | I_R | $V_R = 5 \text{ V}$ | — | — | 10 | μA |
| | Capacitance | C_T | $V = 0, f = 1 \text{ MHz}$ | — | 30 | — | pF |
| DETECTOR | Collector-Emitter Breakdown Voltage | $V_{(BR)CEO}$ | $I_C = 0.5 \text{ mA}$ | 80 | — | — | V |
| | Emitter-Collector Breakdown Voltage | $V_{(BR)ECO}$ | $I_E = 0.1 \text{ mA}$ | 7 | — | — | V |
| | Collector Dark Current (Note 3) | I_{CEO} | $V_{CE} = 48 \text{ V}$ | — | 0.01 | 0.1 | μA |
| | | | Ambient Light Below (100 lx) (Note 4) | — | 2 | 10 | |
| | | | $V_{CE} = 48 \text{ V}, T_a = 85^\circ\text{C}$ | — | 2 | 50 | μA |
| Ambient Light Below (100 lx) (Note 4) | — | 4 | 50 | | | | |
| Capacitance (Collector to Emitter) | C_{CE} | $V = 0, f = 1 \text{ MHz}$ | — | 10 | — | pF | |

(Note 3) Because of the construction, leak current might be increased by ambient light.

Please use photocoupler with less ambient light.

(Note 4) Irradiation to marking side using standard light bulb.

Coupled Electrical Characteristics (Ta = 25°C)

| CHARACTERISTIC | SYMBOL | TEST CONDITION | MIN | TYP. | MAX | UNIT |
|--------------------------------------|--------------------------|---|-----|------|-----|---------------|
| Current Transfer Ratio | I_C / I_F | $I_F = 5 \text{ mA}, V_{CE} = 5 \text{ V}$ Rank GB | 50 | — | 600 | % |
| | | | 100 | — | 600 | |
| Saturated CTR | $I_C / I_F (\text{sat})$ | $I_F = 1 \text{ mA}, V_{CE} = 0.4 \text{ V}$ Rank GB | — | 60 | — | % |
| | | | 30 | — | — | |
| Collector-Emitter Saturation Voltage | $V_{CE (\text{sat})}$ | $I_C = 2.4 \text{ mA}, I_F = 8 \text{ mA}$ $I_C = 0.2 \text{ mA}, I_F = 1 \text{ mA}$ Rank GB | — | — | 0.4 | V |
| | | | — | 0.2 | — | |
| Off-State Collector Current | $I_C (\text{off})$ | $V_F = 0.7 \text{ V}, V_{CE} = 48 \text{ V}$ | — | — | 10 | μA |


Isolation Characteristics (Ta = 25°C)





| CHARACTERISTIC | SYMBOL | TEST CONDITION | MIN | TYP. | MAX | UNIT |
|-------------------------------|--------|--|--------------------|-----------|-----|----------|
| Capacitance (Input to Output) | C_S | $V_S = 0 \text{ V}, f = 1 \text{ MHz}$ | — | 0.8 | — | pF |
| Isolation Resistance | R_S | $V_S = 500 \text{ V}, \text{R.H.} \leq 60\%$ | 5×10^{10} | 10^{14} | — | Ω |
| Isolation Voltage | BV_S | AC, 1 minute | 2500 | — | — | Vrms |
| | | AC, 1 second, in oil | — | 5000 | — | Vdc |
| | | DC, 1 minute, in oil | — | 5000 | — | Vdc |

Switching Characteristics (Ta = 25°C)





| CHARACTERISTIC | SYMBOL | TEST CONDITION | MIN | TYP. | MAX | UNIT |
|----------------|-----------|--|-----|------|-----|---------------|
| Rise Time | t_r | $V_{CC} = 10 \text{ V}, I_C = 2 \text{ mA}$ $R_L = 100 \Omega$ | — | 2 | — | μs |
| Fall Time | t_f | | — | 3 | — | |
| Turn-On Time | t_{on} | | — | 3 | — | |
| Turn-Off Time | t_{off} | | — | 3 | — | |
| Turn-On Time | t_{ON} | $R_L = 1.9 \text{ k}\Omega$ (Fig.1) $V_{CC} = 5 \text{ V}, I_F = 16 \text{ mA}$ | — | 2 | — | μs |
| Storage Time | t_s | | — | 25 | — | |
| Turn-Off Time | t_{OFF} | | — | 40 | — | |

(Fig.1) SWITCHING TIME TEST CIRCUIT




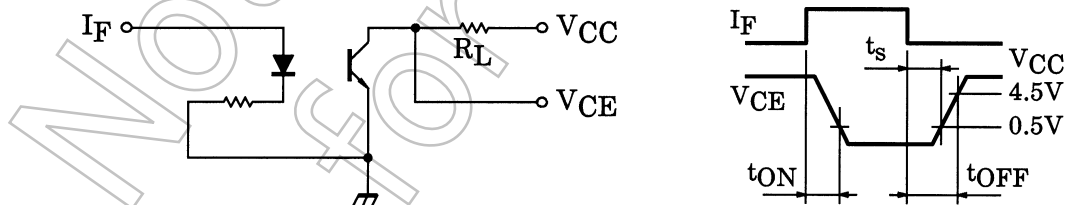


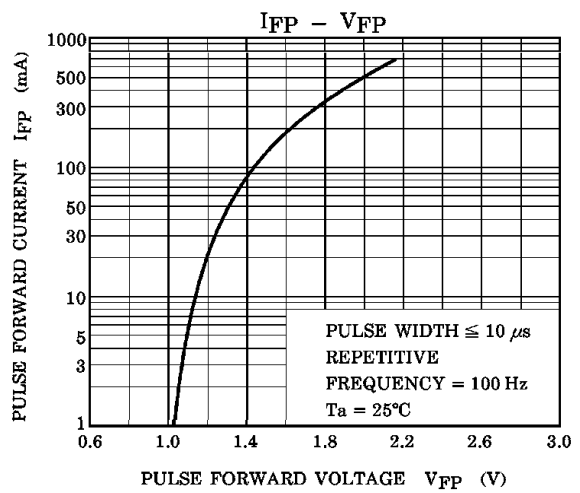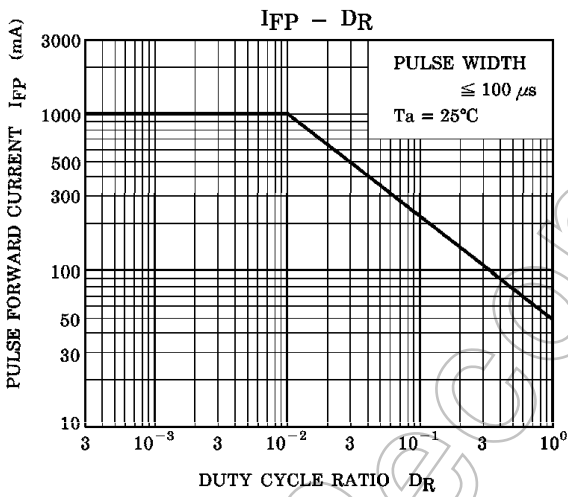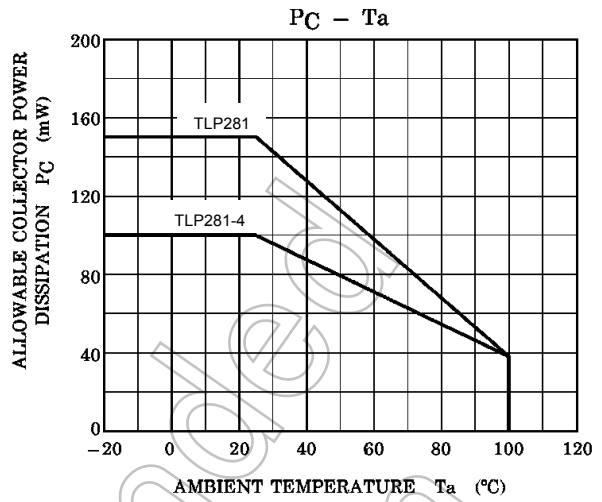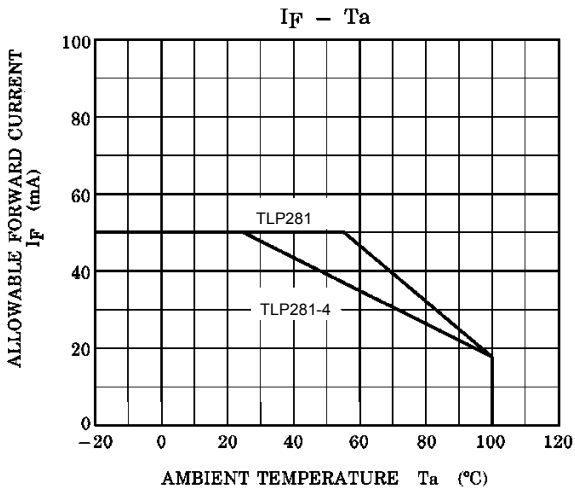

*The above graphs show typical characteristic.

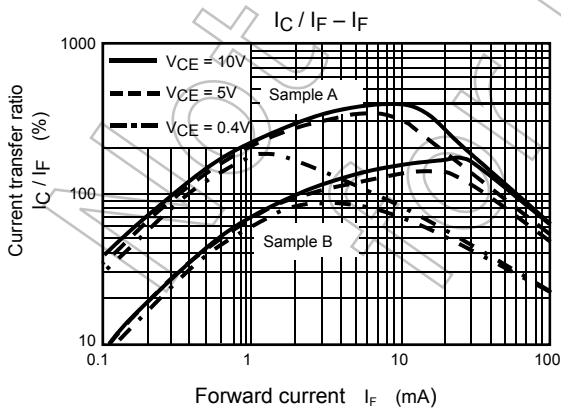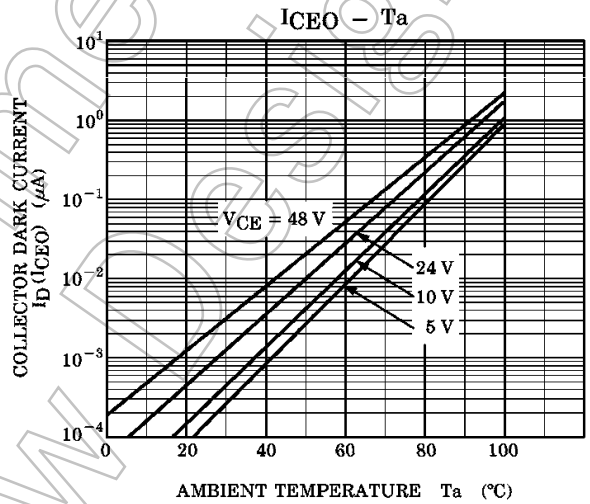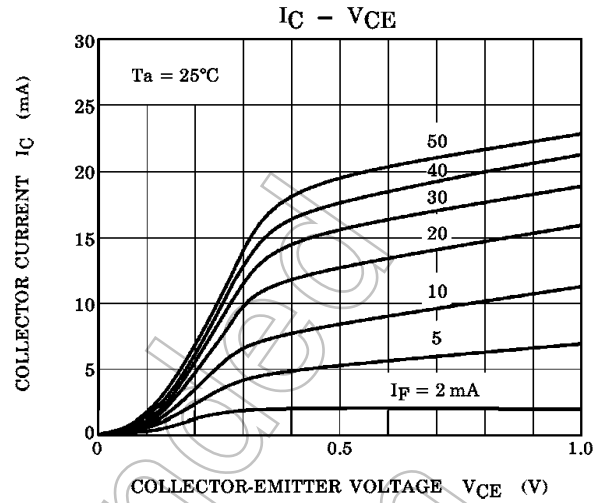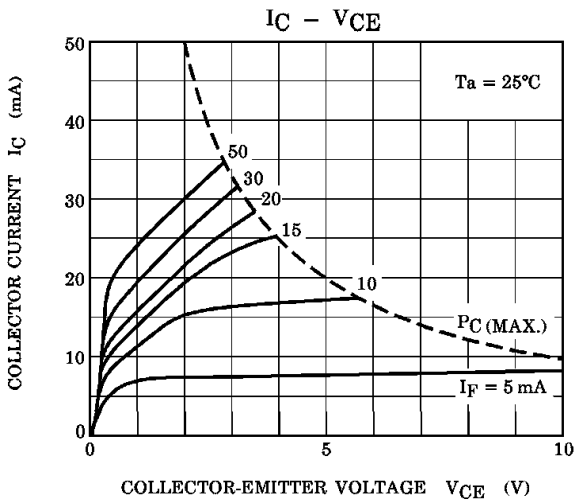

*The above graphs show typical characteristic.

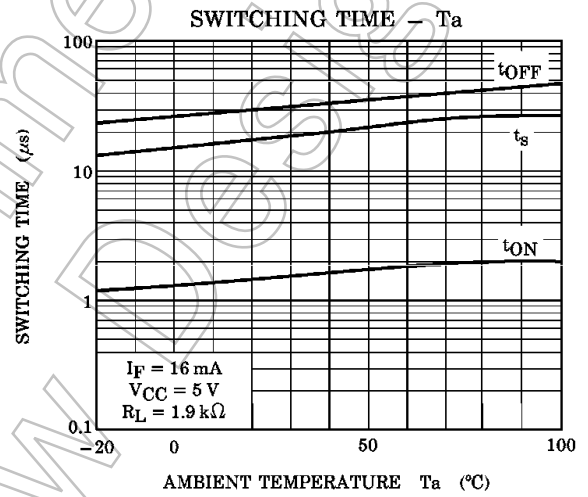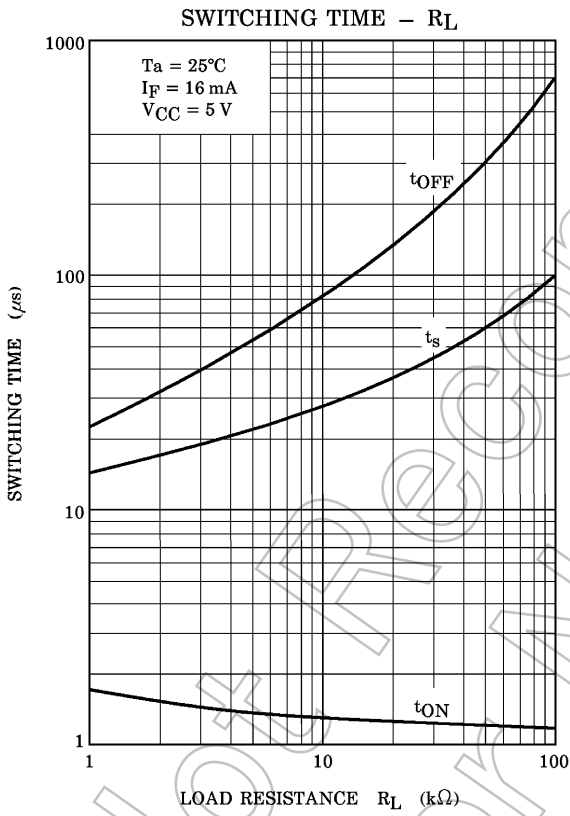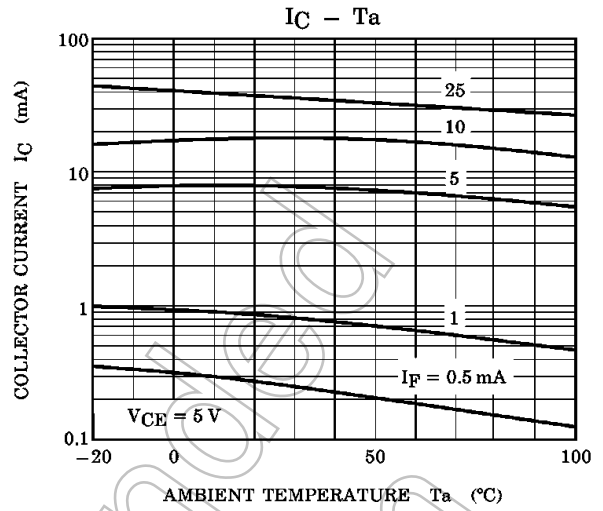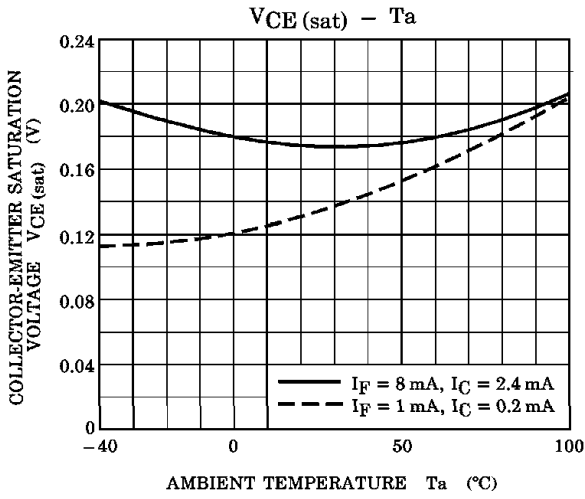

*The above graphs show typical characteristic.

RESTRICTIONS ON PRODUCT USE

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- GaAs (Gallium Arsenide) is used in Product. GaAs is harmful to humans if consumed or absorbed, whether in the form of dust or vapor. Handle with care and do not break, cut, crush, grind, dissolve chemically or otherwise expose GaAs in Product.
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View TLP281\(Y-TP\) on WIN SOURCE](#)
- [Toshiba Semiconductor and Storage Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management