



Is Now Part of



**ON Semiconductor®**

To learn more about ON Semiconductor, please visit our website at  
[www.onsemi.com](http://www.onsemi.com)

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at [www.onsemi.com](http://www.onsemi.com). Please email any questions regarding the system integration to [Fairchild\\_questions@onsemi.com](mailto:Fairchild_questions@onsemi.com).

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## FGH50N6S2D

### 600V, SMPS II Series N-Channel IGBT with Anti-Parallel Stealth™ Diode

#### General Description

The FGH50N6S2D is a Low Gate Charge, Low Plateau Voltage SMPS II IGBT combining the fast switching speed of the SMPS IGBTs along with lower gate charge, plateau voltage and avalanche capability (UIS). These LGC devices shorten delay times, and reduce the power requirement of the gate drive. These devices are ideally suited for high voltage switched mode power supply applications where low conduction loss, fast switching times and UIS capability are essential. SMPS II LGC devices have been specially designed for:

- Power Factor Correction (PFC) circuits
- Full bridge topologies
- Half bridge topologies
- Push-Pull circuits
- Uninterruptible power supplies
- Zero voltage and zero current switching circuits


#### Features

- 100kHz Operation at 390V, 40A
- 200kHz Operation at 390V, 25A
- 600V Switching SOA Capability
- Typical Fall Time. . . . . 90ns at  $T_J = 125^\circ\text{C}$
- Low Gate Charge . . . . . 70nC at  $V_{GE} = 15\text{V}$
- Low Plateau Voltage . . . . . 6.5V Typical
- UIS Rated . . . . . 480mJ
- Low Conduction Loss


IGBT (co-pack) formerly Developmental Type TA49344  
Diode formerly Developmental Type TA49392

#### Package

JEDEC STYLE TO-247

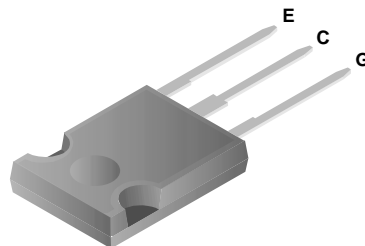

#### Symbol



#### Device Maximum Ratings $T_C = 25^\circ\text{C}$ unless otherwise noted

| Symbol     | Parameter   | Ratings      | Units               |
|------------|---|--------------|---------------------|
| $BV_{CES}$ | Collector to Emitter Breakdown Voltage  | 600          | V                   |
| $I_{C25}$  | Collector Current Continuous, $T_C = 25^\circ\text{C}$                                    | 75           | A                   |
| $I_{C110}$ | Collector Current Continuous, $T_C = 110^\circ\text{C}$                                   | 60           | A                   |
| $I_{CM}$   | Collector Current Pulsed (Note 1)   | 240          | A                   |
| $V_{GES}$  | Gate to Emitter Voltage Continuous  | $\pm 20$     | V                   |
| $V_{GEM}$  | Gate to Emitter Voltage Pulsed  | $\pm 30$     | V                   |
| SSOA       | Switching Safe Operating Area at $T_J = 150^\circ\text{C}$ , Figure 2                     | 150A at 600V |                     |
| $E_{AS}$   | Pulsed Avalanche Energy, $I_{CE} = 30\text{A}$ , $L = 1\text{mH}$ , $V_{DD} = 50\text{V}$ | 480          | mJ                  |
| $P_D$      | Power Dissipation Total $T_C = 25^\circ\text{C}$  | 463          | W                   |
|            | Power Dissipation Derating $T_C > 25^\circ\text{C}$                                       | 3.7          | W/ $^\circ\text{C}$ |
| $T_J$      | Operating Junction Temperature Range  | -55 to 150   | $^\circ\text{C}$    |
| $T_{STG}$  | Storage Junction Temperature Range  | -55 to 150   | $^\circ\text{C}$    |

**CAUTION:** Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTE:

1. Pulse width limited by maximum junction temperature.

## Package Marking and Ordering Information

| Device Marking | Device     | Package | Tape Width | Quantity |
|----------------|------------|---------|------------|----------|
| 50N6S2D        | FGH50N6S2D | TO-247  | N/A        | 30       |

## Electrical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise noted

| Symbol | Parameter | Test Conditions | Min | Typ | Max | Units |
|--------|-----------|-----------------|-----|-----|-----|-------|
|--------|-----------|-----------------|-----|-----|-----|-------|

### Off State Characteristics

|            |  |                                       |                           |   |           |     |               |
|------------|--|---------------------------------------|---------------------------|---|-----------|-----|---------------|
| $BV_{CES}$ | Collector to Emitter Breakdown Voltage | $I_C = 250\mu\text{A}$ , $V_{GE} = 0$ | 600                       | - | -         | V   |               |
| $I_{CES}$  | Collector to Emitter Leakage Current   | $V_{CE} = 600\text{V}$                | $T_J = 25^\circ\text{C}$  | - | -         | 250 | $\mu\text{A}$ |
|            |  |                                       | $T_J = 125^\circ\text{C}$ | - | -         | 2.8 | mA            |
| $I_{GES}$  | Gate to Emitter Leakage Current        | $V_{GE} = \pm 20\text{V}$             | -                         | - | $\pm 250$ | nA  |               |

### On State Characteristics

|               |   |   |                           |     |     |     |   |
|---------------|---|---|---------------------------|-----|-----|-----|---|
| $V_{CE(SAT)}$ | Collector to Emitter Saturation Voltage | $I_C = 30\text{A}$ ,<br>$V_{GE} = 15\text{V}$ | $T_J = 25^\circ\text{C}$  | -   | 1.9 | 2.7 | V |
|               |   |   | $T_J = 125^\circ\text{C}$ | -   | 1.7 | 2.2 | V |
| $V_{EC}$      | Diode Forward Voltage                   | $I_{EC} = 30\text{A}$                         | -                         | 2.2 | 2.6 | V   |   |

### Dynamic Characteristics

|              |                                   |  |                       |     |     |     |    |
|--------------|-----------------------------------|--|-----------------------|-----|-----|-----|----|
| $Q_{G(ON)}$  | Gate Charge                       | $I_C = 30\text{A}$ ,<br>$V_{CE} = 300\text{V}$ | $V_{GE} = 15\text{V}$ | -   | 70  | 85  | nC |
|              |                                   |  | $V_{GE} = 20\text{V}$ | -   | 90  | 110 | nC |
| $V_{GE(TH)}$ | Gate to Emitter Threshold Voltage | $I_C = 250\mu\text{A}$ , $V_{CE} = V_{GE}$     | 3.5                   | 4.3 | 5.0 | V   |    |
| $V_{GEP}$    | Gate to Emitter Plateau Voltage   | $I_C = 30\text{A}$ , $V_{CE} = 300\text{V}$    | -                     | 6.5 | 8.0 | V   |    |

### Switching Characteristics

|               |                             |   |  |     |     |               |    |
|---------------|-----------------------------|---|--|-----|-----|---------------|----|
| SSOA          | Switching SOA               | $T_J = 150^\circ\text{C}$ , $V_{GE} = 15\text{V}$ , $R_G = 3\Omega$<br>$L = 100\mu\text{H}$ , $V_{CE} = 600\text{V}$  | 150  | -   | -   | A             |    |
| $t_{d(ON)I}$  | Current Turn-On Delay Time  | IGBT and Diode at $T_J = 25^\circ\text{C}$ ,<br>$I_{CE} = 30\text{A}$ ,<br>$V_{CE} = 390\text{V}$ ,<br>$V_{GE} = 15\text{V}$ ,<br>$R_G = 3\Omega$ ,<br>$L = 200\mu\text{H}$<br>Test Circuit - Figure 26 | -  | 13  | -   | ns            |    |
| $t_{rI}$      | Current Rise Time           |   | -  | 15  | -   | ns            |    |
| $t_{d(OFF)I}$ | Current Turn-Off Delay Time |   | -  | 55  | -   | ns            |    |
| $t_{fI}$      | Current Fall Time           |   | -  | 50  | -   | ns            |    |
| $E_{ON1}$     | Turn-On Energy (Note 2)     |   | -  | 260 | -   | $\mu\text{J}$ |    |
| $E_{ON2}$     | Turn-On Energy (Note 2)     |   | -  | 330 | -   | $\mu\text{J}$ |    |
| $E_{OFF}$     | Turn-Off Energy (Note 3)    |   | -  | 250 | 350 | $\mu\text{J}$ |    |
| $t_{d(ON)I}$  | Current Turn-On Delay Time  |   | IGBT and Diode at $T_J = 125^\circ\text{C}$ ,<br>$I_{CE} = 30\text{A}$ ,<br>$V_{CE} = 390\text{V}$ ,<br>$V_{GE} = 15\text{V}$ ,<br>$R_G = 3\Omega$ ,<br>$L = 200\mu\text{H}$<br>Test Circuit - Figure 26 | -   | 13  | -             | ns |
| $t_{rI}$      | Current Rise Time           |   |  | -   | 15  | -             | ns |
| $t_{d(OFF)I}$ | Current Turn-Off Delay Time |   |  | -   | 92  | 150           | ns |
| $t_{fI}$      | Current Fall Time           | -   |  | 88  | 100 | ns            |    |
| $E_{ON1}$     | Turn-On Energy (Note 2)     | -   |  | 260 | -   | $\mu\text{J}$ |    |
| $E_{ON2}$     | Turn-On Energy (Note 2)     | -   |  | 490 | 600 | $\mu\text{J}$ |    |
| $E_{OFF}$     | Turn-Off Energy (Note 3)    | -   |  | 575 | 850 | $\mu\text{J}$ |    |
| $t_{rr}$      | Diode Reverse Recovery Time | $I_{EC} = 30\text{A}$ , $dI_{EC}/dt = 200\text{A}/\mu\text{s}$  |  | -   | 50  | 55            | ns |
|               |                             | $I_{EC} = 1\text{A}$ , $dI_{EC}/dt = 200\text{A}/\mu\text{s}$   |  | -   | 30  | 42            | ns |

### Thermal Characteristics

|                 |                                  |       |   |   |      |                           |
|-----------------|----------------------------------|-------|---|---|------|---------------------------|
| $R_{\theta JC}$ | Thermal Resistance Junction-Case | IGBT  | - | - | 0.27 | $^\circ\text{C}/\text{W}$ |
|                 |                                  | Diode | - | - | 1.1  | $^\circ\text{C}/\text{W}$ |

NOTE:

2. Values for two Turn-On loss conditions are shown for the convenience of the circuit designer.  $E_{ON1}$  is the turn-on loss of the IGBT only.  $E_{ON2}$  is the turn-on loss when a typical diode is used in the test circuit and the diode is at the same  $T_J$  as the IGBT. The diode type is specified in figure 26.

3. Turn-Off Energy Loss ( $E_{OFF}$ ) is defined as the integral of the instantaneous power loss starting at the trailing edge of the input pulse and ending at the point where the collector current equals zero ( $I_{CE} = 0\text{A}$ ). All devices were tested per JEDEC Standard No. 24-1 Method for Measurement of Power Device Turn-Off Switching Loss. This test method produces the true total Turn-Off Energy Loss.

Typical Performance Curves  $T_J = 25^\circ\text{C}$  unless otherwise noted

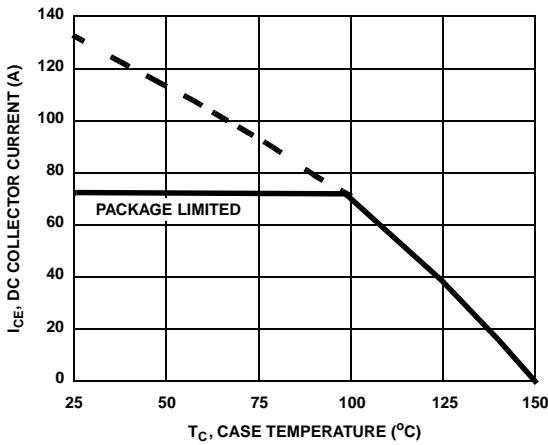


Figure 1. DC Collector Current vs Case Temperature

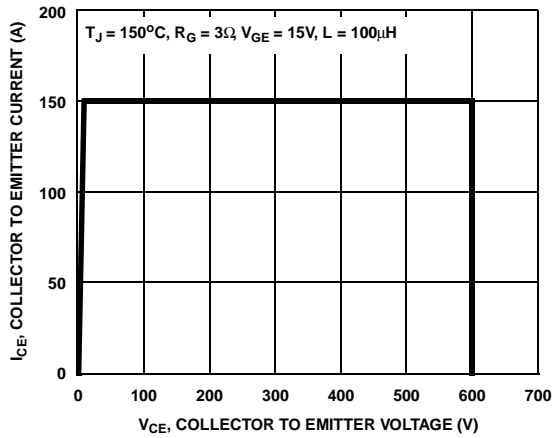


Figure 2. Minimum Switching Safe Operating Area

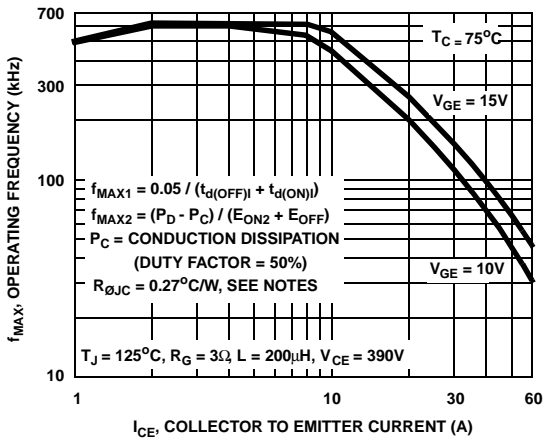


Figure 3. Operating Frequency vs Collector to Emitter Current

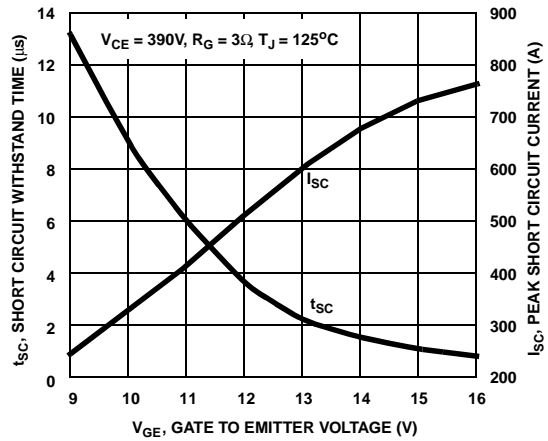


Figure 4. Short Circuit Withstand Time

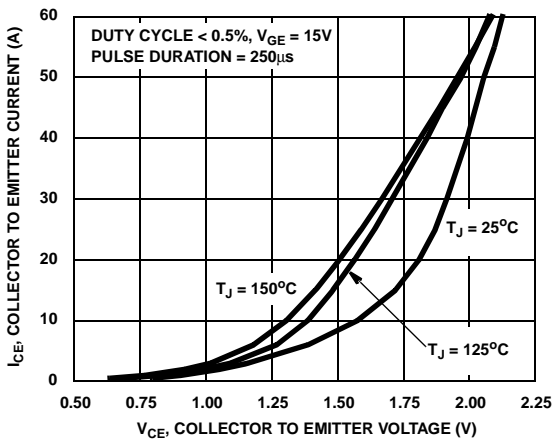


Figure 5. Collector to Emitter On-State Voltage



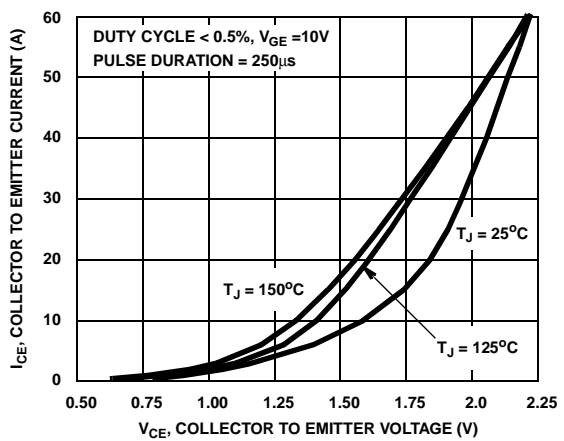


Figure 6. Collector to Emitter On-State Voltage


**Typical Performance Curves**  $T_J = 25^\circ\text{C}$  unless otherwise noted

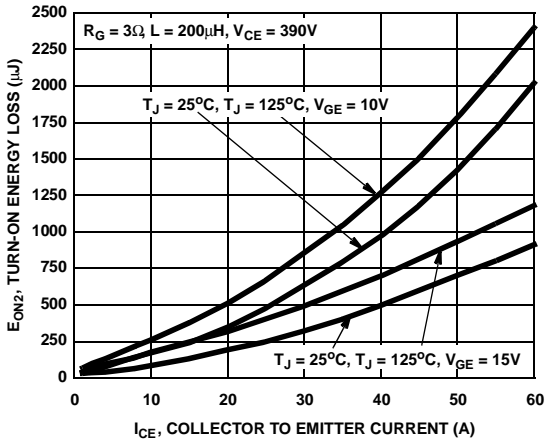


**Figure 7. Turn-On Energy Loss vs Collector to Emitter Current**

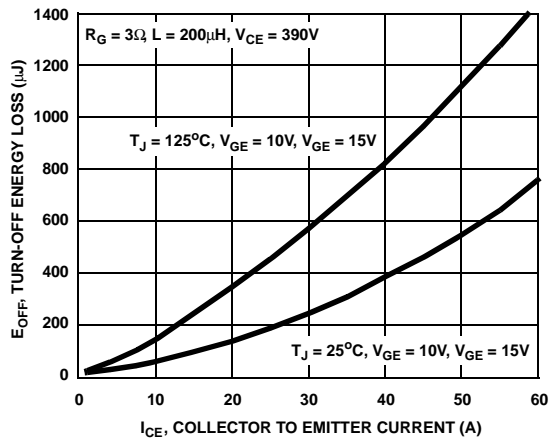


**Figure 8. Turn-Off Energy Loss vs Collector to Emitter Current**

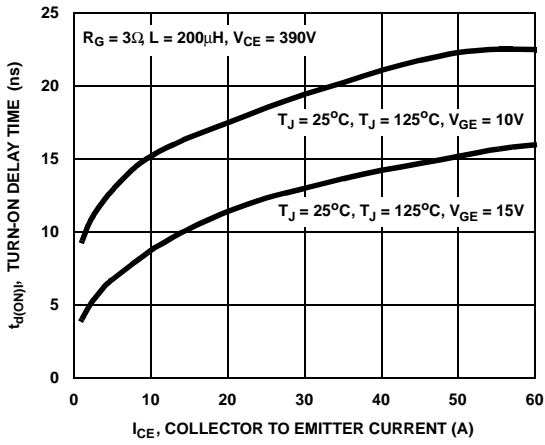


**Figure 9. Turn-On Delay Time vs Collector to Emitter Current**

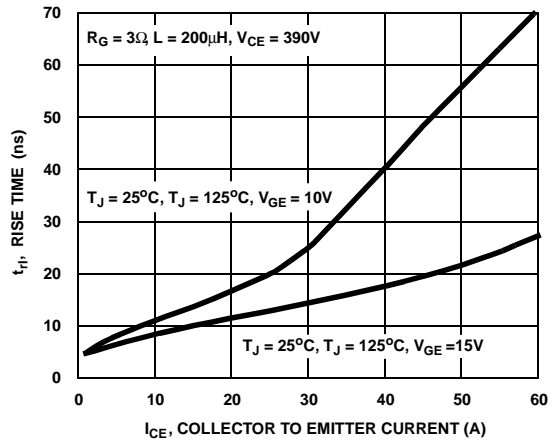

**Figure 10. Turn-On Rise Time vs Collector to Emitter Current**

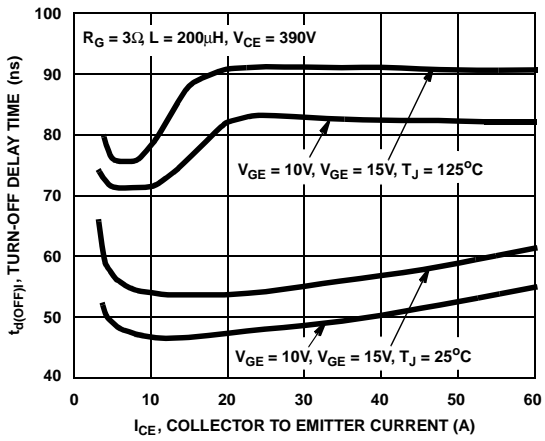

**Figure 11. Turn-Off Delay Time vs Collector to Emitter Current**

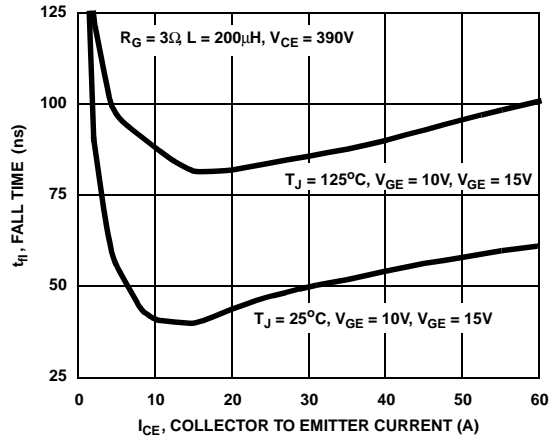

**Figure 12. Fall Time vs Collector to Emitter Current**

**Typical Performance Curves**  $T_J = 25^\circ\text{C}$  unless otherwise noted

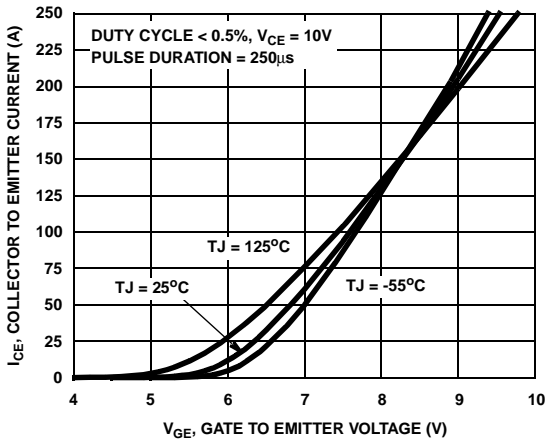


Figure 13. Transfer Characteristic

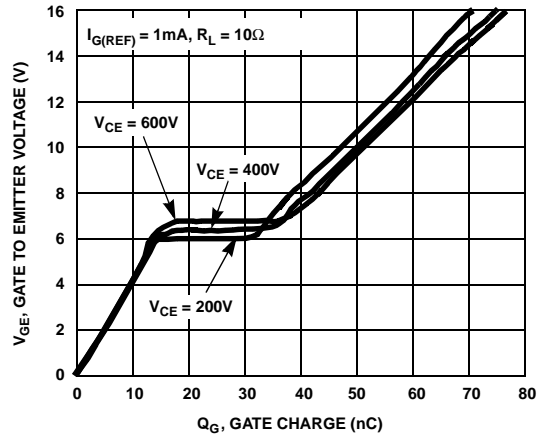


Figure 14. Gate Charge

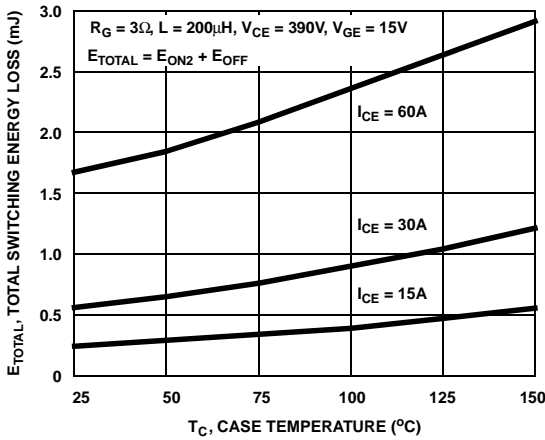


Figure 15. Total Switching Loss vs Case Temperature

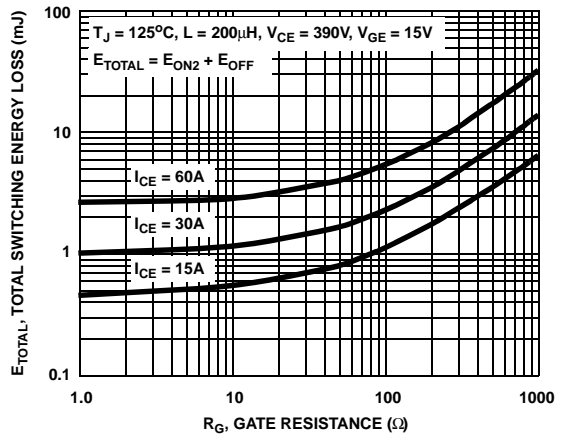


Figure 16. Total Switching Loss vs Gate Resistance

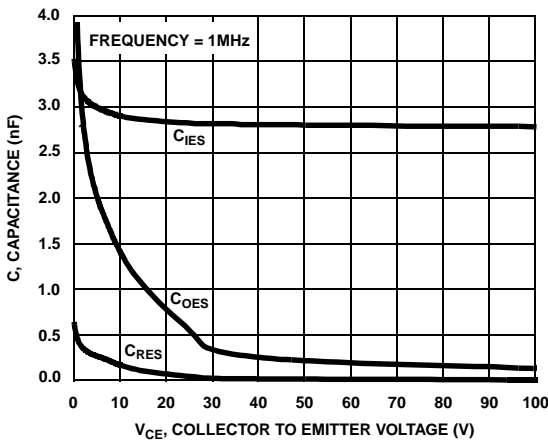


Figure 17. Capacitance vs Collector to Emitter Voltage



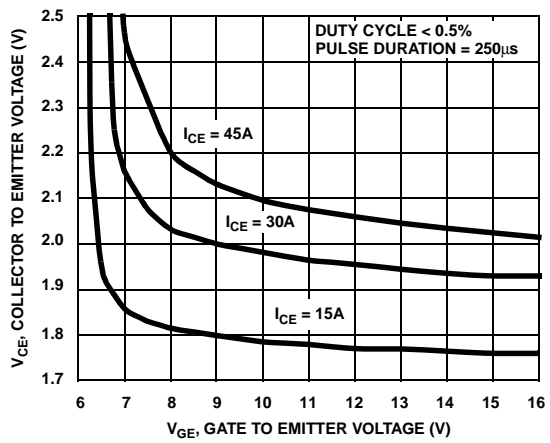


Figure 18. Collector to Emitter On-State Voltage vs Gate to Emitter Voltage


**Typical Performance Curves**  $T_J = 25^\circ\text{C}$  unless otherwise noted

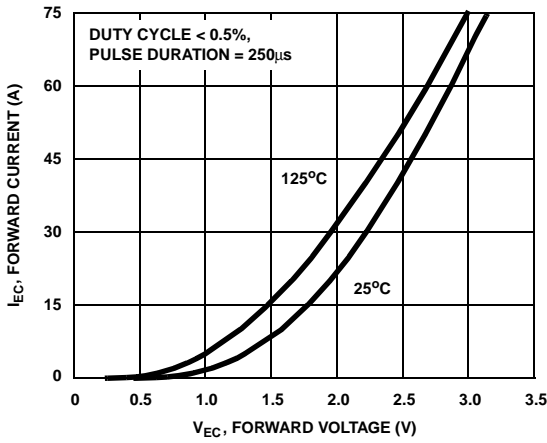


**Figure 19. Diode Forward Current vs Forward Voltage Drop**

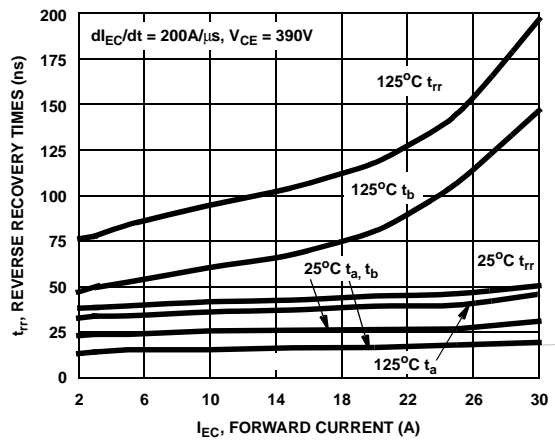


**Figure 20. Recovery Times vs Forward Current**

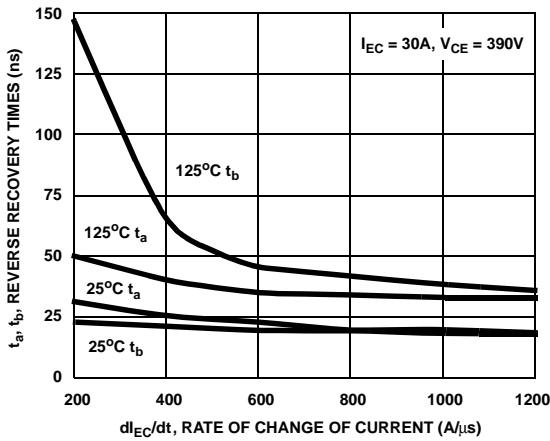


**Figure 21. Recovery Times vs Rate of Change of Current**

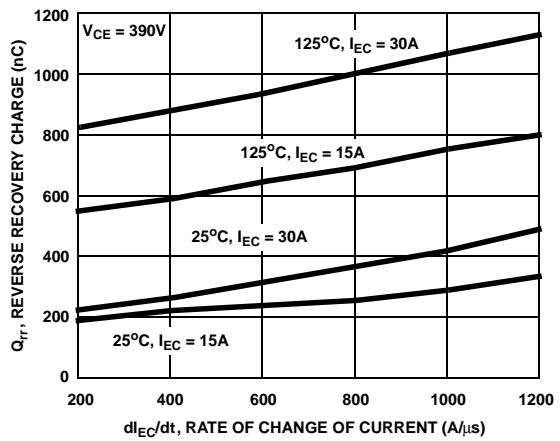

**Figure 22. Stored Charge vs Rate of Change of Current**

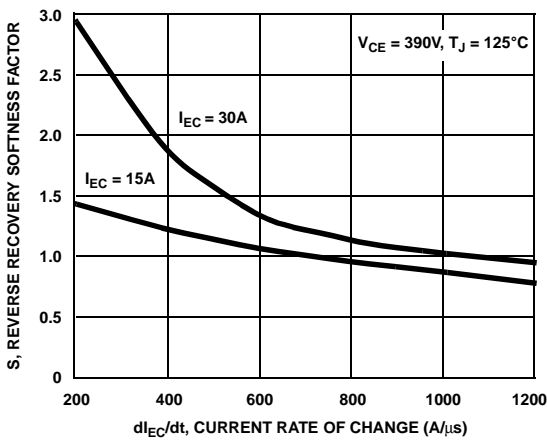

**Figure 23. Reverse Recovery Softness Factor vs Rate of Change of Current**

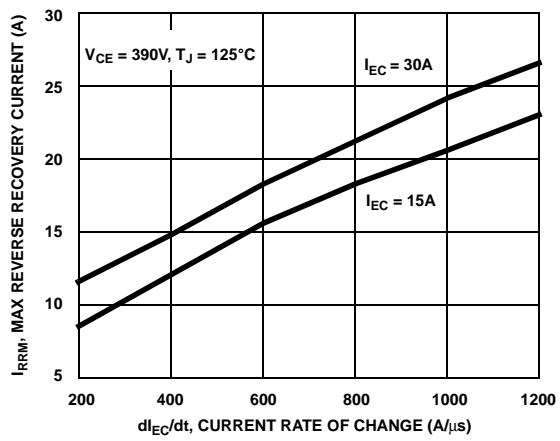

**Figure 24. Maximum Reverse Recovery Current vs Rate of Change of Current**

**Typical Performance Curves**  $T_J = 25^\circ\text{C}$  unless otherwise noted

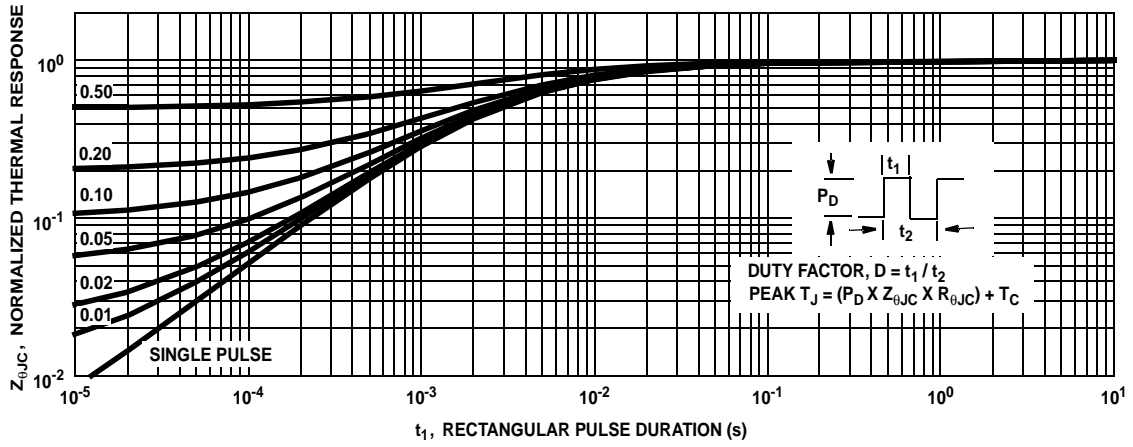


Figure 25. IGBT Normalized Transient Thermal Impedance, Junction to Case

**Test Circuit and Waveforms**

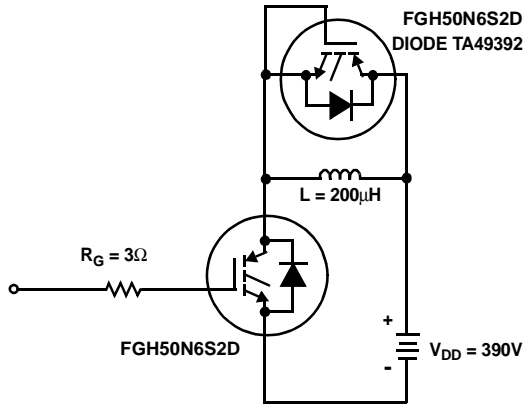


Figure 26. Inductive Switching Test Circuit

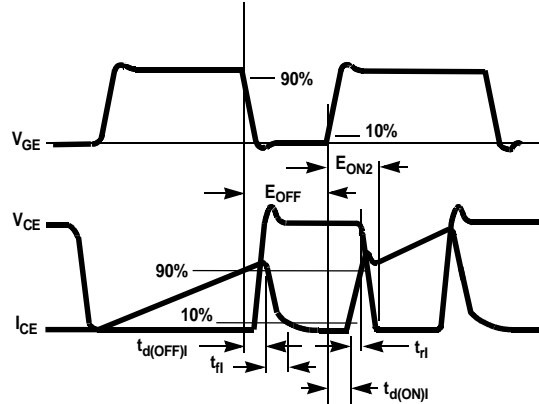


Figure 27. Switching Test Waveforms

## Handling Precautions for IGBTs

Insulated Gate Bipolar Transistors are susceptible to gate-insulation damage by the electrostatic discharge of energy through the devices. When handling these devices, care should be exercised to assure that the static charge built in the handler's body capacitance is not discharged through the device. With proper handling and application procedures, however, IGBTs are currently being extensively used in production by numerous equipment manufacturers in military, industrial and consumer applications, with virtually no damage problems due to electrostatic discharge. IGBTs can be handled safely if the following basic precautions are taken:

1. Prior to assembly into a circuit, all leads should be kept shorted together either by the use of metal shorting springs or by the insertion into conductive material such as "ECCOSORBD™ LD26" or equivalent.
2. When devices are removed by hand from their carriers, the hand being used should be grounded by any suitable means - for example, with a metallic wristband.
3. Tips of soldering irons should be grounded.
4. Devices should never be inserted into or removed from circuits with power on.
5. **Gate Voltage Rating** - Never exceed the gate-voltage rating of  $V_{GEM}$ . Exceeding the rated  $V_{GE}$  can result in permanent damage to the oxide layer in the gate region.
6. **Gate Termination** - The gates of these devices are essentially capacitors. Circuits that leave the gate open-circuited or floating should be avoided. These conditions can result in turn-on of the device due to voltage buildup on the input capacitor due to leakage currents or pickup.
7. **Gate Protection** - These devices do not have an internal monolithic Zener diode from gate to emitter. If gate protection is required an external Zener is recommended.

## Operating Frequency Information

Operating frequency information for a typical device (Figure 3) is presented as a guide for estimating device performance for a specific application. Other typical frequency vs collector current ( $I_{CE}$ ) plots are possible using the information shown for a typical unit in Figures 5, 6, 7, 8, 9 and 11. The operating frequency plot (Figure 3) of a typical device shows  $f_{MAX1}$  or  $f_{MAX2}$ ; whichever is smaller at each point. The information is based on measurements of a typical device and is bounded by the maximum rated junction temperature.

$f_{MAX1}$  is defined by  $f_{MAX1} = 0.05 / (t_{d(OFF)1} + t_{d(ON)1})$ . Deadtime (the denominator) has been arbitrarily held to 10% of the on-state time for a 50% duty factor. Other definitions are possible.  $t_{d(OFF)1}$  and  $t_{d(ON)1}$  are defined in Figure 27. Device turn-off delay can establish an additional frequency limiting condition for an application other than  $T_{JM}$ .  $t_{d(OFF)1}$  is important when controlling output ripple under a lightly loaded condition.

$f_{MAX2}$  is defined by  $f_{MAX2} = (P_D - P_C) / (E_{OFF} + E_{ON2})$ . The allowable dissipation ( $P_D$ ) is defined by  $P_D = (T_{JM} - T_C) / R_{\theta JC}$ . The sum of device switching and conduction losses must not exceed  $P_D$ . A 50% duty factor was used (Figure 3) and the conduction losses ( $P_C$ ) are approximated by  $P_C = (V_{CE} \times I_{CE}) / 2$ .

$E_{ON2}$  and  $E_{OFF}$  are defined in the switching waveforms shown in Figure 27.  $E_{ON2}$  is the integral of the instantaneous power loss ( $I_{CE} \times V_{CE}$ ) during turn-on and  $E_{OFF}$  is the integral of the instantaneous power loss ( $I_{CE} \times V_{CE}$ ) during turn-off. All tail losses are included in the calculation for  $E_{OFF}$ ; i.e., the collector current equals zero ( $I_{CE} = 0$ )

ECCOSORBD™ is a Trademark of Emerson and Cumming, Inc.

## TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

|                                  |                                 |                                 |                             |                  |
|----------------------------------|---------------------------------|---------------------------------|-----------------------------|------------------|
| ACE <sub>x</sub> <sup>™</sup>    | FAST <sub>r</sub> <sup>™</sup>  | OPTOLOGIC <sup>®</sup>          | SMART START <sup>™</sup>    | VCX <sup>™</sup> |
| Bottomless <sup>™</sup>          | FRFET <sup>™</sup>              | OPTOPLANAR <sup>™</sup>         | SPM <sup>™</sup>            |                  |
| CoolFET <sup>™</sup>             | GlobalOptoisolator <sup>™</sup> | PACMAN <sup>™</sup>             | Stealth <sup>™</sup>        |                  |
| CROSSVOLT <sup>™</sup>           | GTO <sup>™</sup>                | POP <sup>™</sup>                | SuperSOT <sup>™</sup> -3    |                  |
| DOME <sup>™</sup>                | HiSeC <sup>™</sup>              | Power247 <sup>™</sup>           | SuperSOT <sup>™</sup> -6    |                  |
| EcoSPARK <sup>™</sup>            | I <sup>2</sup> C <sup>™</sup>   | PowerTrench <sup>®</sup>        | SuperSOT <sup>™</sup> -8    |                  |
| E <sup>2</sup> CMOS <sup>™</sup> | ISOPLANAR <sup>™</sup>          | QFET <sup>™</sup>               | SyncFET <sup>™</sup>        |                  |
| EnSigna <sup>™</sup>             | LittleFET <sup>™</sup>          | QST <sup>™</sup>                | TinyLogic <sup>™</sup>      |                  |
| FACT <sup>™</sup>                | MicroFET <sup>™</sup>           | QT Optoelectronics <sup>™</sup> | TruTranslation <sup>™</sup> |                  |
| FACT Quiet Series <sup>™</sup>   | MicroPak <sup>™</sup>           | Quiet Series <sup>™</sup>       | UHC <sup>™</sup>            |                  |
| FAST <sup>®</sup>                | MICROWIRE <sup>™</sup>          | SILENT SWITCHER <sup>®</sup>    | UltraFET <sup>®</sup>       |                  |

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status         | Definition  |
|--------------------------|------------------------|---|
| Advance Information      | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.  |
| Preliminary              | First Production       | This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| No Identification Needed | Full Production        | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.   |
| Obsolete                 | Not In Production      | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.   |

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:



Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>  
For additional information, please contact your local  
Sales Representative

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View FGH50N6S2D on WIN SOURCE](#)
-  [Fairchild/ON Semiconductor Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management