



**THE DATASHEET OF
74LVT16500ADGG,112**



Important notice

Dear Customer,

On 7 February 2017 the former NXP Standard Product business became a new company with the tradename **Nexperia**. Nexperia is an industry leading supplier of Discrete, Logic and PowerMOS semiconductors with its focus on the automotive, industrial, computing, consumer and wearable application markets

In data sheets and application notes which still contain NXP or Philips Semiconductors references, use the references to Nexperia, as shown below.

Instead of <http://www.nxp.com>, <http://www.philips.com/> or <http://www.semiconductors.philips.com/>, use <http://www.nexperia.com>

Instead of sales.addresses@www.nxp.com or sales.addresses@www.semiconductors.philips.com, use salesaddresses@nexperia.com (email)

Replace the copyright notice at the bottom of each page or elsewhere in the document, depending on the version, as shown below:

- © NXP N.V. (year). All rights reserved or © Koninklijke Philips Electronics N.V. (year). All rights reserved

Should be replaced with:

- © **Nexperia B.V. (year). All rights reserved.**

If you have any questions related to the data sheet, please contact our nearest sales office via e-mail or telephone (details via salesaddresses@nexperia.com). Thank you for your cooperation and understanding,

Kind regards,

Team Nexperia

74LVT16500A

3.3 V 18-bit universal bus transceiver; 3-state

Rev. 03 — 29 May 2006

Product data sheet

1. General description

The 74LVT16500A is a high-performance BiCMOS product designed for V_{CC} operation at 3.3 V.

This device is an 18-bit universal transceiver featuring non-inverting 3-state bus compatible outputs in both send and receive directions. Data flow in each direction is controlled by output enable (OEAB and \overline{OEBA}), latch enable (LEAB and LEBA), and clock (CPAB and CPBA) inputs. For A-to-B data flow, the device operates in the transparent mode when LEAB is HIGH. When LEAB is LOW, the A data is latched if \overline{CPAB} is held at a HIGH or LOW logic level. If LEAB is LOW, the A-bus data is stored in the latch/flip-flop on the HIGH-to-LOW transition of \overline{CPAB} . When OEAB is HIGH, the outputs are active. When OEAB is LOW, the outputs are in the high-impedance state.

Data flow for B-to-A is similar to that of A-to-B but uses \overline{OEBA} , LEBA and \overline{CPBA} . The output enables are complimentary (OEAB is active HIGH, and \overline{OEBA} is active LOW).

Active bus-hold circuitry is provided to hold unused or floating data inputs at a valid logic level.

2. Features

- 18-bit bidirectional bus interface
- 3-state buffers
- Output capability: +64 mA and -32 mA
- TTL input and output switching levels
- Input and output interface capability to systems at 5 V supply
- Bus-hold data inputs eliminate the need for external pull-up resistors to hold unused inputs
- Live insertion/extraction permitted
- Power-up reset
- Power-up 3-state
- No bus current loading when output is tied to 5 V bus
- Negative edge-triggered clock inputs
- Latch-up protection:
 - ◆ JESD78: exceeds 500 mA
- ESD protection:
 - ◆ MIL STD 883 Method 3015: exceeds 2000 V
 - ◆ CDM JESD22-C101-C exceeds 1000 V


PHILIPS

3. Ordering information

Table 1. Ordering information

| Type number | Package | | | Version |
|----------------|-------------------|---------|--|----------|
| | Temperature range | Name | Description | |
| 74LVT16500ADGG | -40 °C to +85 °C | TSSOP56 | plastic thin shrink small outline package; 56 leads; body width 6.1 mm | SOT364-1 |
| 74LVT16500ADL | -40 °C to +85 °C | SSOP56 | plastic shrink small outline package; 56 leads; body width 7.5 mm | SOT371-1 |

4. Functional diagram

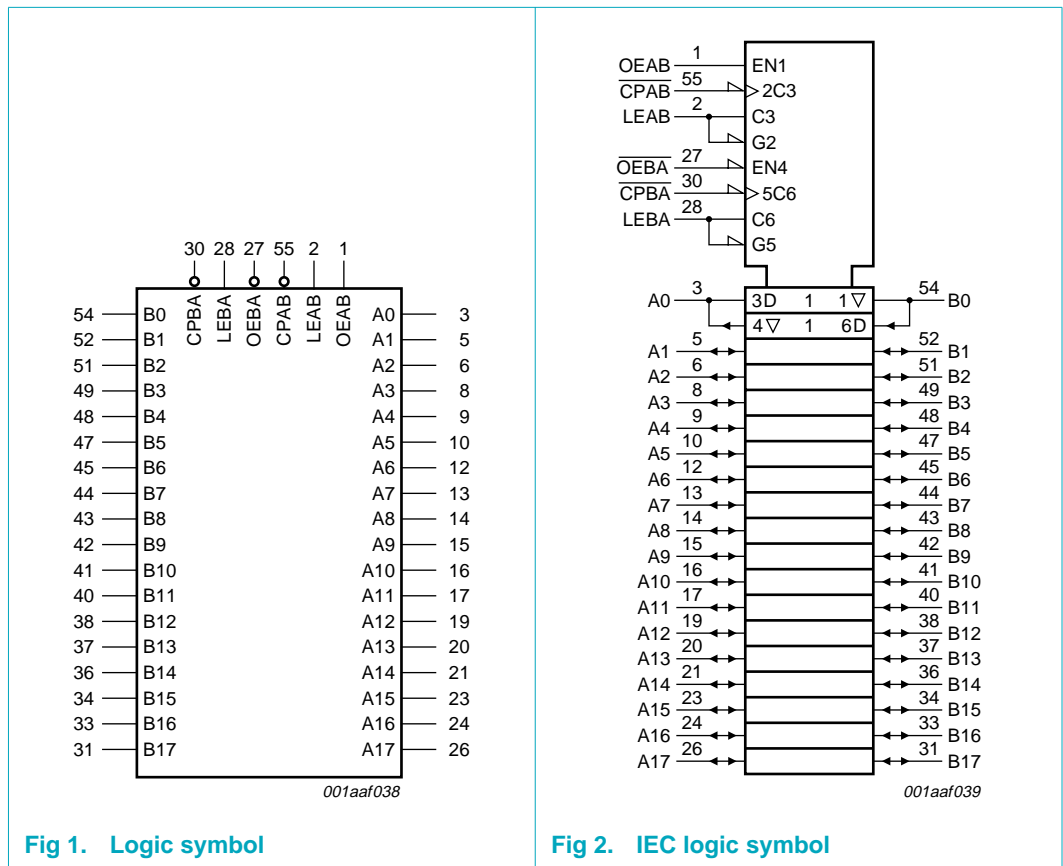


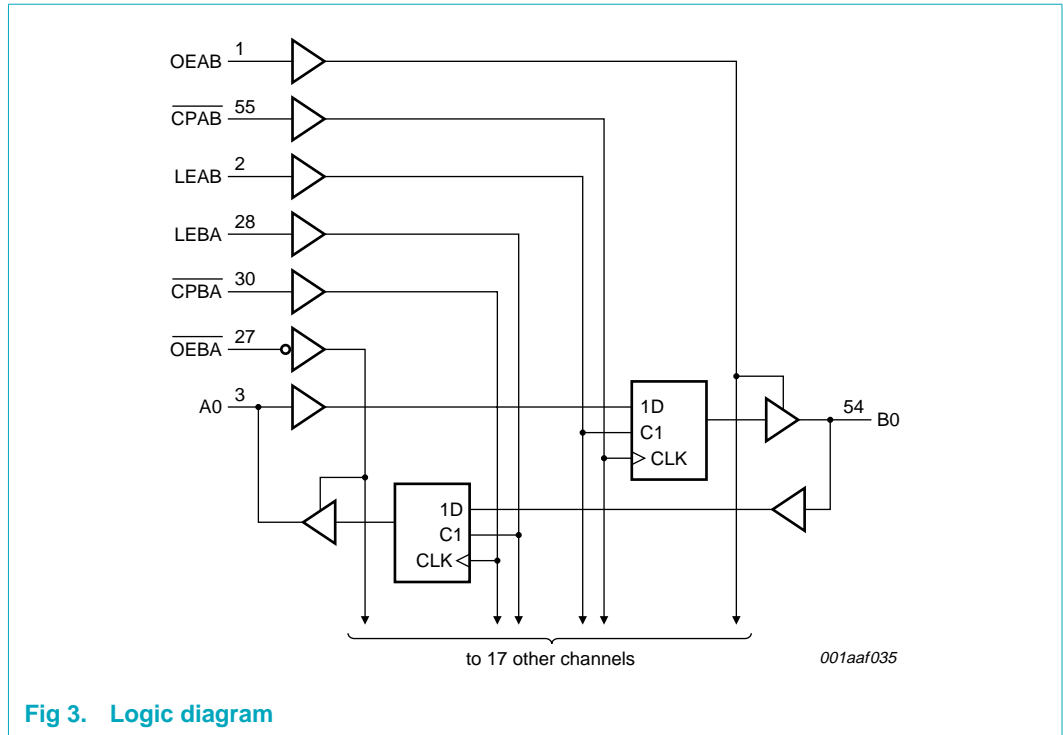


Fig 3. Logic diagram

5. Pinning information

5.1 Pinning

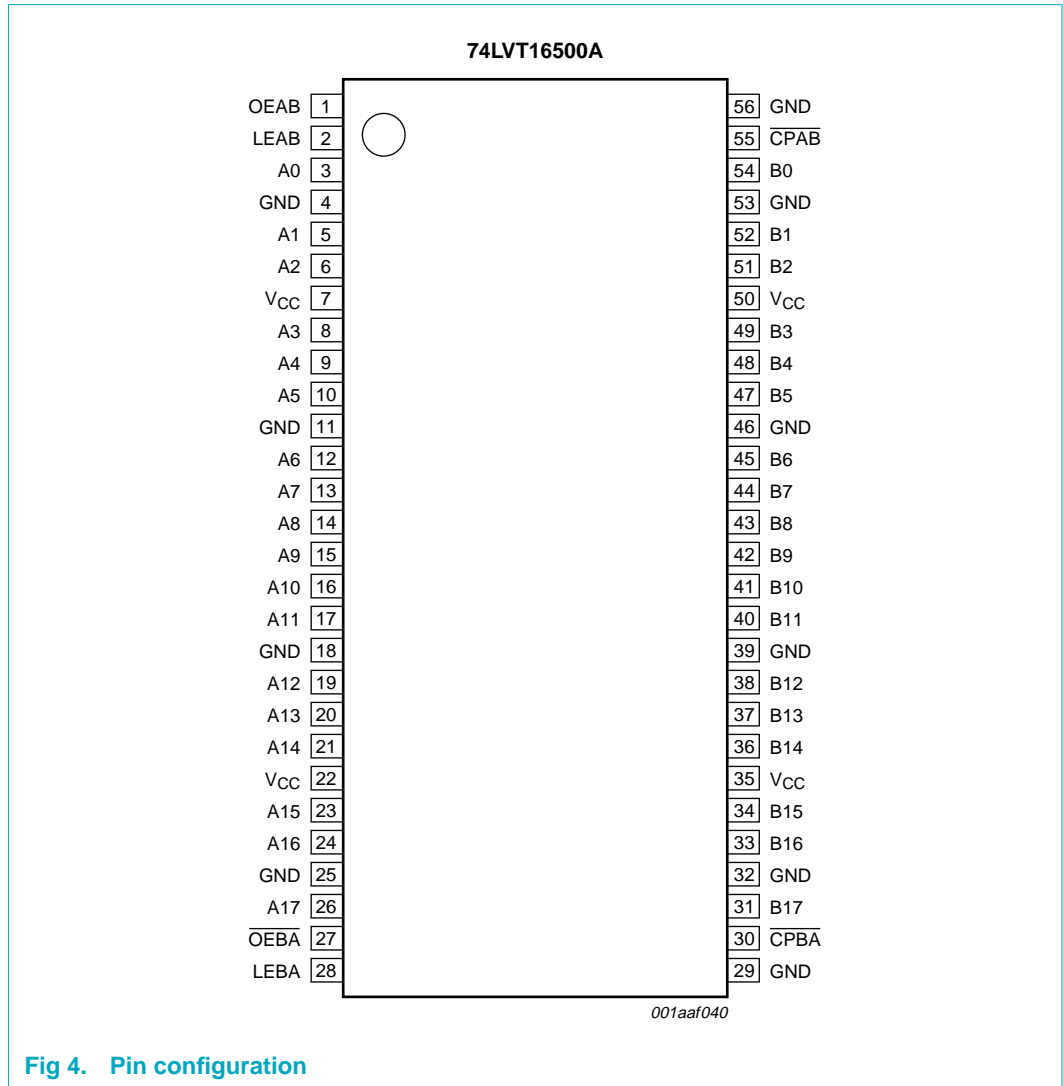

5.2 Pin description

Table 2. Pin description

| Symbol | Pin | Description |
|--------|-----|----------------------------|
| OEAB | 1 | A-to-B output enable input |
| LEAB | 2 | A-to-B latch enable input |
| A0 | 3 | data input/output A0 |
| GND | 4 | ground (0 V) |
| A1 | 5 | data input/output A1 |
| A2 | 6 | data input/output A2 |
| Vcc | 7 | supply voltage |

Table 2. Pin description ...continued

| Symbol | Pin | Description |
|-------------------|-----|--|
| A3 | 8 | data input/output A3 |
| A4 | 9 | data input/output A4 |
| A5 | 10 | data input/output A5 |
| GND | 11 | ground (0 V) |
| A6 | 12 | data input/output A6 |
| A7 | 13 | data input/output A7 |
| A8 | 14 | data input/output A8 |
| A9 | 15 | data input/output A9 |
| A10 | 16 | data input/output A10 |
| A11 | 17 | data input/output A11 |
| GND | 18 | ground (0 V) |
| A12 | 19 | data input/output A12 |
| A13 | 20 | data input/output A13 |
| A14 | 21 | data input/output A14 |
| V _{CC} | 22 | supply voltage |
| A15 | 23 | data input/output A15 |
| A16 | 24 | data input/output A16 |
| GND | 25 | ground (0 V) |
| A17 | 26 | data input/output A17 |
| \overline{OEBA} | 27 | B-to-A output enable input (active LOW) |
| LEBA | 28 | B-to-A latch enable input |
| GND | 29 | ground (0 V) |
| \overline{CPBA} | 30 | B-to-A clock input (active falling edge) |
| B17 | 31 | data input/output B17 |
| GND | 32 | ground (0 V) |
| B16 | 33 | data input/output B16 |
| B15 | 34 | data input/output B15 |
| V _{CC} | 35 | supply voltage |
| B14 | 36 | data input/output B14 |
| B13 | 37 | data input/output B13 |
| B12 | 38 | data input/output B12 |
| GND | 39 | ground (0 V) |
| B11 | 40 | data input/output B11 |
| B10 | 41 | data input/output B10 |
| B9 | 42 | data input/output B9 |
| B8 | 43 | data input/output B8 |
| B7 | 44 | data input/output B7 |
| B6 | 45 | data input/output B6 |
| GND | 46 | ground (0 V) |
| B5 | 47 | data input/output B5 |
| B4 | 48 | data input/output B4 |

Table 2. Pin description ...continued

| Symbol | Pin | Description |
|--------------------------|-----|--|
| B3 | 49 | data input/output B3 |
| V _{CC} | 50 | supply voltage |
| B2 | 51 | data input/output B2 |
| B1 | 52 | data input/output B1 |
| GND | 53 | ground (0 V) |
| B0 | 54 | data input/output B0 |
| $\overline{\text{CPAB}}$ | 55 | A-to-B clock input (active falling edge) |
| GND | 56 | ground (0 V) |

6. Functional description

Table 3. Function table^[1]

| Operating mode | Control | | | Input | Internal register | Output |
|------------------------|--------------------------|------|--------------------------|----------------|-------------------|----------------|
| | OEAB | LEAB | $\overline{\text{CPAB}}$ | A _n | | B _n |
| | $\overline{\text{OEBA}}$ | LEBA | $\overline{\text{CPBA}}$ | B _n | | A _n |
| disabled | L | H | X | X | X | Z |
| disabled, latch data | L | ↓ | X | h | H | Z |
| disabled, latch data | L | ↓ | X | l | L | Z |
| disabled, hold data | L | L | H or L | X | NC | Z |
| disabled, clock data | L | L | ↓ | h | H | Z |
| disabled, clock data | L | L | ↓ | l | L | Z |
| transparent | H | H | X | H | H | H |
| transparent | H | H | X | L | L | L |
| latch data and display | H | ↓ | X | h | H | H |
| latch data and display | H | ↓ | X | l | L | L |
| clock data and display | H | L | ↓ | h | H | H |
| clock data and display | H | L | ↓ | l | L | L |
| hold data and display | H | L | H or L | X | H | H |
| hold data and display | H | L | H or L | X | L | L |

- [1] H = HIGH voltage level;
h = HIGH voltage level one setup time prior to the enable or clock transition;
L = LOW voltage level;
l = LOW voltage level one setup time prior to the enable or clock transition;
NC = no change;
X = don't care;
Z = high-impedance OFF-state;
↓ = HIGH-to-LOW enable or clock transition.

7. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

| Symbol | Parameter | Conditions | Min | Max | Unit |
|-----------|-------------------------|-----------------------------------|----------|------|------|
| V_{CC} | supply voltage | | -0.5 | +4.6 | V |
| V_I | input voltage | | [1] -0.5 | +7.0 | V |
| V_O | output voltage | output in OFF-state or HIGH-state | [1] -0.5 | +7.0 | V |
| I_{IK} | input clamping current | $V_I < 0$ V | - | -50 | mA |
| I_{OK} | output clamping current | $V_O < 0$ V | - | -50 | mA |
| I_O | output current | output in LOW-state | - | 128 | mA |
| | | output in HIGH-state | - | -64 | mA |
| T_{stg} | storage temperature | | -65 | +150 | °C |
| T_j | junction temperature | | [2] - | 150 | °C |

[1] The input and output negative voltage ratings may be exceeded if the input and output clamp current ratings are observed.

[2] The performance capability of a high-performance integrated circuit in conjunction with its thermal environment can create junction temperatures which are detrimental to reliability.

8. Recommended operating conditions

Table 5. Recommended operating conditions

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|---------------------|-------------------------------------|---|-----|-----|-----|------|
| V_{CC} | supply voltage | | 2.7 | - | 3.6 | V |
| V_I | input voltage | | 0 | - | 5.5 | V |
| V_{IH} | HIGH-level input voltage | | 2.0 | - | - | V |
| V_{IL} | LOW-level input voltage | | - | - | 0.8 | V |
| I_{OH} | HIGH-level output current | | - | - | -32 | mA |
| I_{OL} | LOW-level output current | none | - | - | 32 | mA |
| | | current duty cycle ≤ 50 %; $f_i \geq 1$ kHz | - | - | 64 | mA |
| $\Delta t/\Delta V$ | input transition rise and fall rate | outputs enabled | - | - | 10 | ns/V |
| T_{amb} | ambient temperature | in free air | -40 | - | +85 | °C |

9. Static characteristics

Table 6. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|---|------------------------------------|---|------------------|----------|-----------|---------------|
| $T_{amb} = -40\text{ °C to }85\text{ °C}$^[1] | | | | | | |
| V_{IK} | input clamping voltage | $V_{CC} = 2.7\text{ V}; I_{IK} = -18\text{ mA}$ | - | -0.85 | -1.2 | V |
| V_{OH} | HIGH-level output voltage | $V_{CC} = 2.7\text{ V to }3.6\text{ V}; I_{OH} = -100\text{ }\mu\text{A}$ | $V_{CC} - 0.2$ | V_{CC} | - | V |
| | | $V_{CC} = 2.7\text{ V}; I_{OH} = -8\text{ mA}$ | 2.4 | 2.55 | - | V |
| | | $V_{CC} = 3.0\text{ V}; I_{OH} = -32\text{ mA}$ | 2.0 | 2.3 | - | V |
| V_{OL} | LOW-level output voltage | $V_{CC} = 2.7\text{ V}$ | | | | |
| | | $I_{OL} = 100\text{ }\mu\text{A}$ | - | 0.07 | 0.2 | V |
| | | $I_{OL} = 24\text{ mA}$ | - | 0.3 | 0.5 | V |
| | | $V_{CC} = 3.0\text{ V}$ | | | | |
| | | $I_{OL} = 16\text{ mA}$ | - | 0.25 | 0.4 | V |
| | | $I_{OL} = 32\text{ mA}$ | - | 0.3 | 0.5 | V |
| V_{OL} | LOW-level output voltage | $I_{OL} = 64\text{ mA}$ | - | 0.36 | 0.55 | V |
| | | $V_{CC} = 3.6\text{ V}; I_O = 1\text{ mA}; V_I = V_{CC}\text{ or GND}$ | ^[2] - | 0.1 | 0.55 | V |
| | | $V_{CC} = 3.6\text{ V}; V_I = V_{CC}\text{ or GND}$ | - | 0.1 | ± 1 | μA |
| I_{LI} | input leakage current | $V_{CC} = 0\text{ V or }3.6\text{ V}; V_I = 5.5\text{ V}$ | - | 0.1 | 10 | μA |
| | | $V_{CC} = 3.6\text{ V}$ | ^[3] | | | |
| | | $V_I = 5.5\text{ V}$ | - | 1.0 | 20 | μA |
| | | $V_I = V_{CC}$ | - | 0.1 | 10 | μA |
| | | $V_I = 0\text{ V}$ | - | +0.1 | -5 | μA |
| I_{OFF} | power-off leakage current | $V_{CC} = 0\text{ V}; V_I\text{ or }V_O = 0\text{ V to }4.5\text{ V}$ | - | 1.0 | ± 100 | μA |
| I_{HOLD} | bus hold current data input | $V_{CC} = 3\text{ V}$ | ^[4] | | | |
| | | $V_I = 0.8\text{ V}$ | 75 | 130 | - | μA |
| | | $V_I = 2.0\text{ V}$ | -75 | -130 | - | μA |
| | | $V_I = 0\text{ V to }3.6\text{ V}; V_{CC} = 3.6\text{ V}$ | ± 500 | - | - | μA |
| I_{EX} | external current into output | output in the HIGH-state when $V_O > V_{CC}$; $V_O = 5.5\text{ V}; V_{CC} = 3.0\text{ V}$ | - | 50 | 125 | μA |
| $I_{O(pu/pd)}$ | power-up/power-down output current | $V_{CC} \leq 1.2\text{ V}; V_O = 0.5\text{ V to }V_{CC}; V_I = \text{GND or }V_{CC}; \text{OEAB or } \overline{\text{OEBA}} \text{ don't care}$ | ^[5] - | 40 | ± 100 | μA |
| I_{CC} | quiescent supply current | $V_{CC} = 3.6\text{ V}; V_I = \text{GND or }V_{CC}; I_O = 0\text{ A}$ | | | | |
| | | outputs HIGH-state | - | 0.07 | 0.12 | mA |
| | | outputs LOW-state | - | 4 | 6 | mA |
| | | outputs disabled | ^[6] - | 0.07 | 0.12 | mA |

Table 6. Static characteristics ...continued

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|-----------------|-------------------------------------|---|-------|-----|-----|------|
| ΔI_{CC} | additional quiescent supply current | per input pin; $V_{CC} = 3\text{ V to }3.6\text{ V}$; one input at $V_{CC} - 0.6\text{ V}$; other inputs at V_{CC} or GND | [7] - | 0.1 | 0.2 | mA |
| C_i | input capacitance | control pins; $V_I = 0\text{ V or }3.0\text{ V}$ | - | 3 | - | pF |
| C_{io} | input/output capacitance | I/O pins; $V_{I/O} = 0\text{ V or }3.0\text{ V}$ | - | 9 | - | pF |

- [1] Typical values are at $V_{CC} = 3.3\text{ V}$ and $T_{amb} = 25\text{ }^\circ\text{C}$.
- [2] For valid test results, data must not be loaded into the flip-flops (or latches) after applying power.
- [3] Unused pins at V_{CC} or GND.
- [4] This is the bus hold overdrive current required to force the input to the opposite logic state.
- [5] This parameter is valid for any V_{CC} between 0 V and 1.2 V with a transition time of up to 10 ms. From $V_{CC} = 1.2\text{ V}$ to $V_{CC} = 3.0\text{ V} \pm 0.3\text{ V}$ a transition time of 100 μs is permitted. This parameter is valid for $T_{amb} = 25\text{ }^\circ\text{C}$ only.
- [6] I_{CC} is measured with outputs pulled to V_{CC} or GND.
- [7] This is the increase in supply current for each input at the specified voltage level other than V_{CC} or GND.

10. Dynamic characteristics

Table 7. Dynamic characteristics

Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 11](#).

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|---|--|-------------------------------|-----|-----|-----|------|
| $V_{CC} = 2.7\text{ V}$; $T_{amb} = -40\text{ }^\circ\text{C to }85\text{ }^\circ\text{C}$ | | | | | | |
| t_{PLH} | propagation delay | | | | | |
| | An to Bn or Bn to An | see Figure 5 | - | - | 5.4 | ns |
| | \overline{CPAB} to Bn or \overline{CPBA} to An | see Figure 6 | - | - | 6.4 | ns |
| | LEAB to Bn or LEBA to An | see Figure 7 | - | - | 6.4 | ns |
| t_{PHL} | propagation delay | | | | | |
| | An to Bn or Bn to An | see Figure 5 | - | - | 5.4 | ns |
| | \overline{CPAB} to Bn or \overline{CPBA} to An | see Figure 6 | - | - | 6.4 | ns |
| | LEAB to Bn or LEBA to An | see Figure 7 | - | - | 6.4 | ns |
| t_{PZH} | output enable time to HIGH-level | see Figure 8 | - | - | 5.5 | ns |
| t_{PZL} | output enable time to LOW-level | see Figure 9 | - | - | 5.2 | ns |
| t_{PHZ} | output disable time from HIGH-level | see Figure 8 | - | - | 6.3 | ns |
| t_{PLZ} | output disable time from LOW-level | see Figure 9 | - | - | 5.6 | ns |
| $t_{su(H)}$ | setup time HIGH | | | | | |
| | An to \overline{CPAB} or Bn to \overline{CPBA} | see Figure 10 | 2.5 | - | - | ns |
| | An to LEAB with \overline{CPAB} LOW or Bn to LEBA with \overline{CPBA} LOW | see Figure 10 | 2.2 | - | - | ns |
| | An to LEAB with \overline{CPAB} HIGH or Bn to LEBA with \overline{CPBA} HIGH | see Figure 10 | 2.7 | - | - | ns |

Table 7. Dynamic characteristics ...continuedVoltages are referenced to GND (ground = 0 V); for test circuit see [Figure 11](#).

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--|--|-------------------------------|-----|-----|-----|------|
| $t_{su(L)}$ | setup time LOW | | | | | |
| | An to \overline{CPAB} or Bn to \overline{CPBA} | see Figure 10 | 2.5 | - | - | ns |
| | An to LEAB with \overline{CPAB} LOW or Bn to LEBA with \overline{CPBA} LOW | see Figure 10 | 2.2 | - | - | ns |
| | An to LEAB with \overline{CPAB} HIGH or Bn to LEBA with \overline{CPBA} HIGH | see Figure 10 | 2.7 | - | - | ns |
| $t_{h(H)}$ | hold time HIGH | | | | | |
| | An to \overline{CPAB} or Bn to \overline{CPBA} | see Figure 10 | 0 | - | - | ns |
| | An to LEAB or Bn to LEBA | see Figure 10 | 0 | - | - | ns |
| $t_{h(L)}$ | hold time LOW | | | | | |
| | An to \overline{CPAB} or Bn to \overline{CPBA} | see Figure 10 | 0 | - | - | ns |
| | An to LEAB or Bn to LEBA | see Figure 10 | 0 | - | - | ns |
| t_{WH} | pulse width HIGH | | | | | |
| | \overline{CPAB} or \overline{CPBA} | see Figure 6 | 1.5 | - | - | ns |
| | LEAB or LEBA | see Figure 7 | 1.5 | - | - | ns |
| t_{WL} | pulse width LOW | | | | | |
| | \overline{CPAB} or \overline{CPBA} | see Figure 6 | 1.5 | - | - | ns |
| $V_{CC} = 3.0\text{ V} \pm 0.3\text{ V}$; $T_{amb} = -40\text{ }^{\circ}\text{C}$ to $85\text{ }^{\circ}\text{C}$[1] | | | | | | |
| t_{PLH} | propagation delay | | | | | |
| | An to Bn or Bn to An | see Figure 5 | 0.5 | 1.9 | 4.2 | ns |
| | \overline{CPAB} to Bn or \overline{CPBA} to An | see Figure 6 | 1.0 | 3.2 | 5.4 | ns |
| | LEAB to Bn or LEBA to An | see Figure 7 | 1.0 | 2.4 | 5.4 | ns |
| t_{PHL} | propagation delay | | | | | |
| | An to Bn or Bn to An | see Figure 5 | 0.5 | 1.9 | 4.2 | ns |
| | \overline{CPAB} to Bn or \overline{CPBA} to An | see Figure 6 | 1.0 | 3.2 | 5.4 | ns |
| | LEAB to Bn or LEBA to An | see Figure 7 | 1.0 | 2.9 | 5.4 | ns |
| t_{PZH} | output enable time to HIGH-level | see Figure 8 | 1.0 | 2.4 | 4.8 | ns |
| t_{PZL} | output enable time to LOW-level | see Figure 9 | 1.0 | 2.2 | 4.8 | ns |
| t_{PHZ} | output disable time from HIGH-level | see Figure 8 | 1.0 | 2.8 | 5.8 | ns |
| t_{PLZ} | output disable time from LOW-level | see Figure 9 | 1.0 | 3.2 | 5.2 | ns |
| $t_{su(H)}$ | setup time HIGH | | | | | |
| | An to \overline{CPAB} or Bn to \overline{CPBA} | see Figure 10 | 2.4 | 1.0 | - | ns |
| | An to LEAB with \overline{CPAB} LOW or Bn to LEBA with \overline{CPBA} LOW | see Figure 10 | 2.3 | 0.9 | - | ns |
| | An to LEAB with \overline{CPAB} HIGH or Bn to LEBA with \overline{CPBA} HIGH | see Figure 10 | 2.4 | 0.9 | - | ns |
| $t_{su(L)}$ | setup time LOW | | | | | |
| | An to \overline{CPAB} or Bn to \overline{CPBA} | see Figure 10 | 2.4 | 0.7 | - | ns |
| | An to LEAB with \overline{CPAB} LOW or Bn to LEBA with \overline{CPBA} LOW | see Figure 10 | 2.3 | 0.9 | - | ns |
| | An to LEAB with \overline{CPAB} HIGH or Bn to LEBA with \overline{CPBA} HIGH | see Figure 10 | 2.4 | 0.8 | - | ns |


Table 7. Dynamic characteristics ...continued




Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 11](#).

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|------------|--|-------------------------------|-----|-----|-----|------|
| $t_{h(H)}$ | hold time HIGH | | | | | |
| | An to \overline{CPAB} or Bn to \overline{CPBA} | see Figure 10 | 0 | 0 | - | ns |
| | An to LEAB or Bn to LEBA | see Figure 10 | 0 | 0 | - | ns |
| $t_{h(L)}$ | hold time LOW | | | | | |
| | An to \overline{CPAB} or Bn to \overline{CPBA} | see Figure 10 | 0 | 0 | - | ns |
| | An to LEAB or Bn to LEBA | see Figure 10 | 0 | 0 | - | ns |
| t_{WH} | pulse width HIGH | | | | | |
| | \overline{CPAB} or \overline{CPBA} | see Figure 6 | 1.2 | 0.8 | - | ns |
| | LEAB or LEBA | see Figure 7 | 1.2 | 0.8 | - | ns |
| t_{WL} | pulse width LOW | | | | | |
| | \overline{CPAB} or \overline{CPBA} | see Figure 6 | 1.2 | 0.8 | - | ns |
| f_{max} | maximum input clock frequency | see Figure 6 | 150 | 350 | - | MHz |

[1] All typical values are measured at $V_{CC} = 3.3\text{ V}$ and $T_{amb} = 25\text{ }^\circ\text{C}$.

11. Waveforms

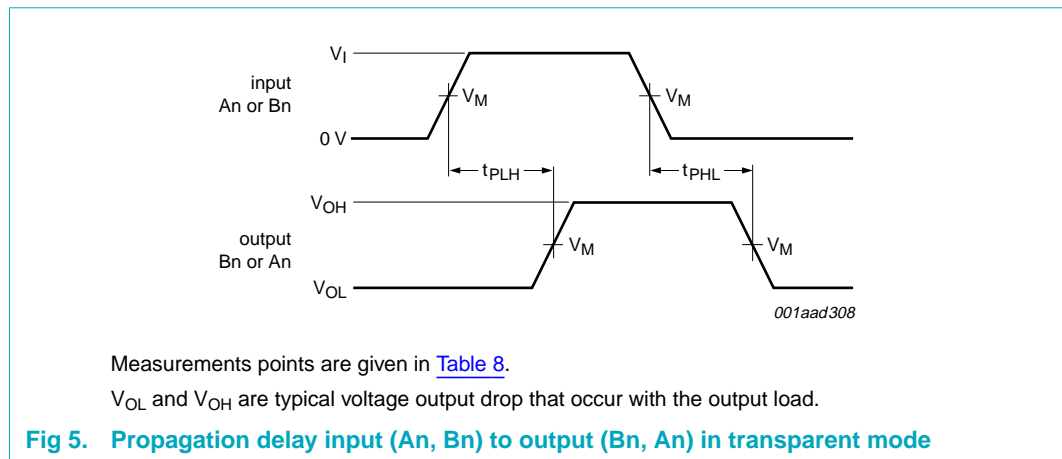

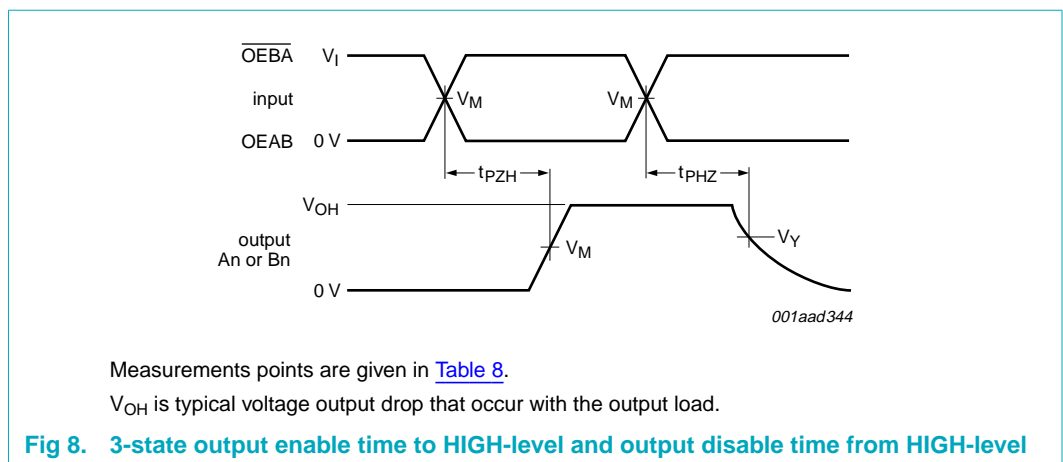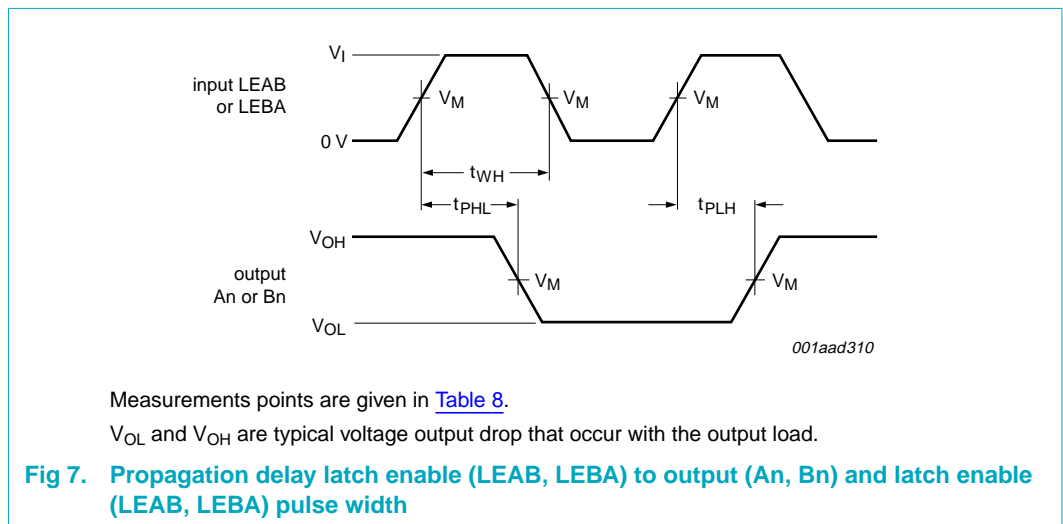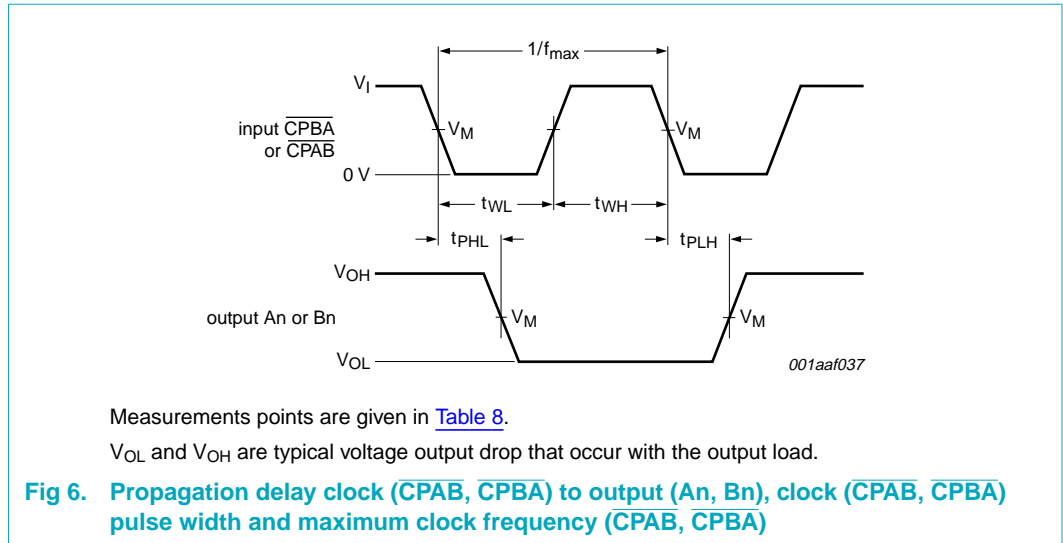

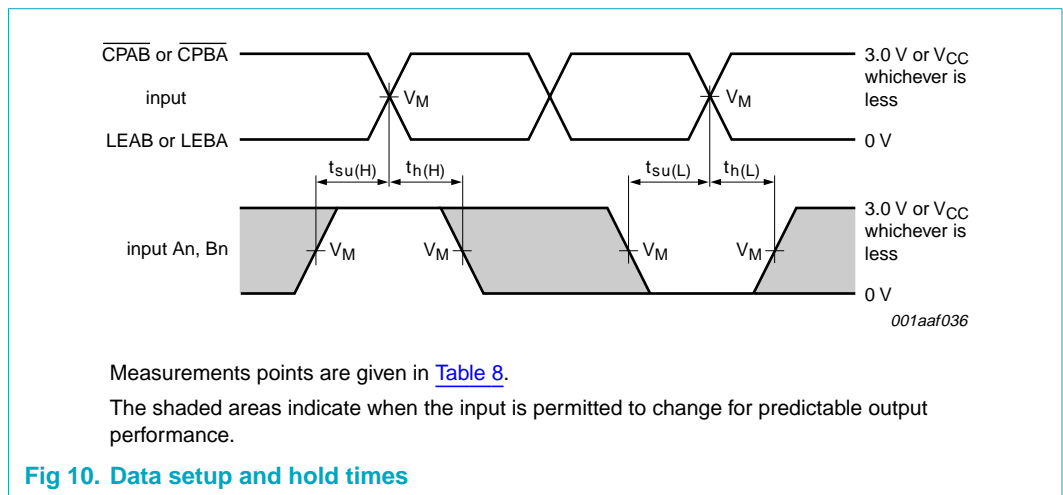
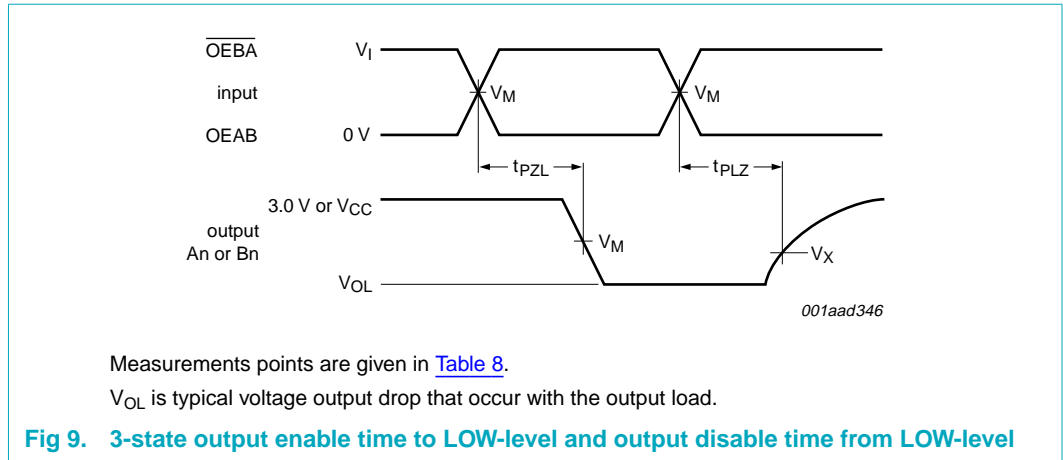


Table 8. Measurement points

| Supply voltage | Input | Output | | |
|----------------|-------|--------|------------------|------------------|
| | V_M | V_M | V_X | V_Y |
| 2.7 V | 1.5 V | 1.5 V | $V_{OL} + 0.3 V$ | $V_{OH} - 0.3 V$ |
| 3.3 V | 1.5 V | 1.5 V | $V_{OL} + 0.3 V$ | $V_{OH} - 0.3 V$ |

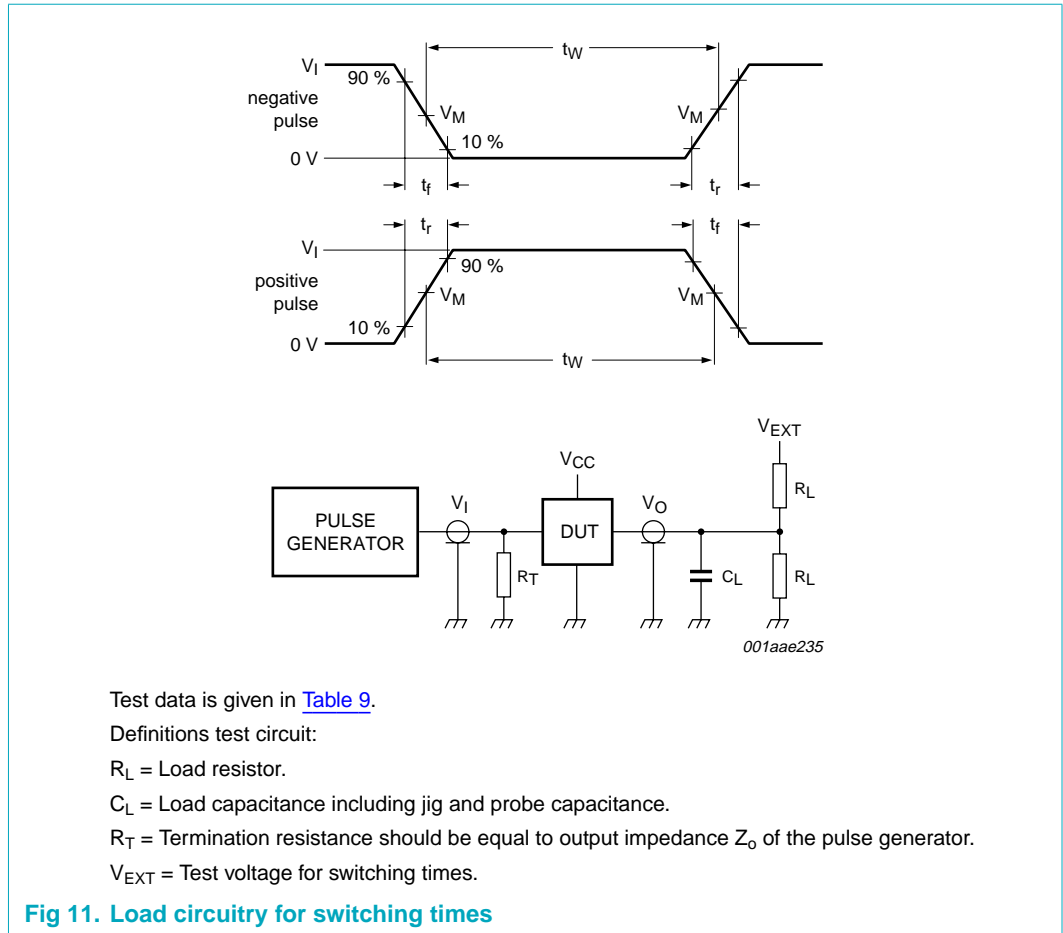


Table 9. Test data

| Input | | | | Load | | V_{EXT} | | |
|-------|---------------|--------|---------------|-------|--------------|--------------------|--------------------|--------------------|
| V_I | f_i | t_W | t_r, t_f | C_L | R_L | t_{PHZ}, t_{PZH} | t_{PLZ}, t_{PZL} | t_{PLH}, t_{PHL} |
| 2.7 V | ≤ 10 MHz | 500 ns | ≤ 2.5 ns | 50 pF | 500 Ω | GND | 6 V | open |

12. Package outline

TSSOP56: plastic thin shrink small outline package; 56 leads; body width 6.1 mm

SOT364-1

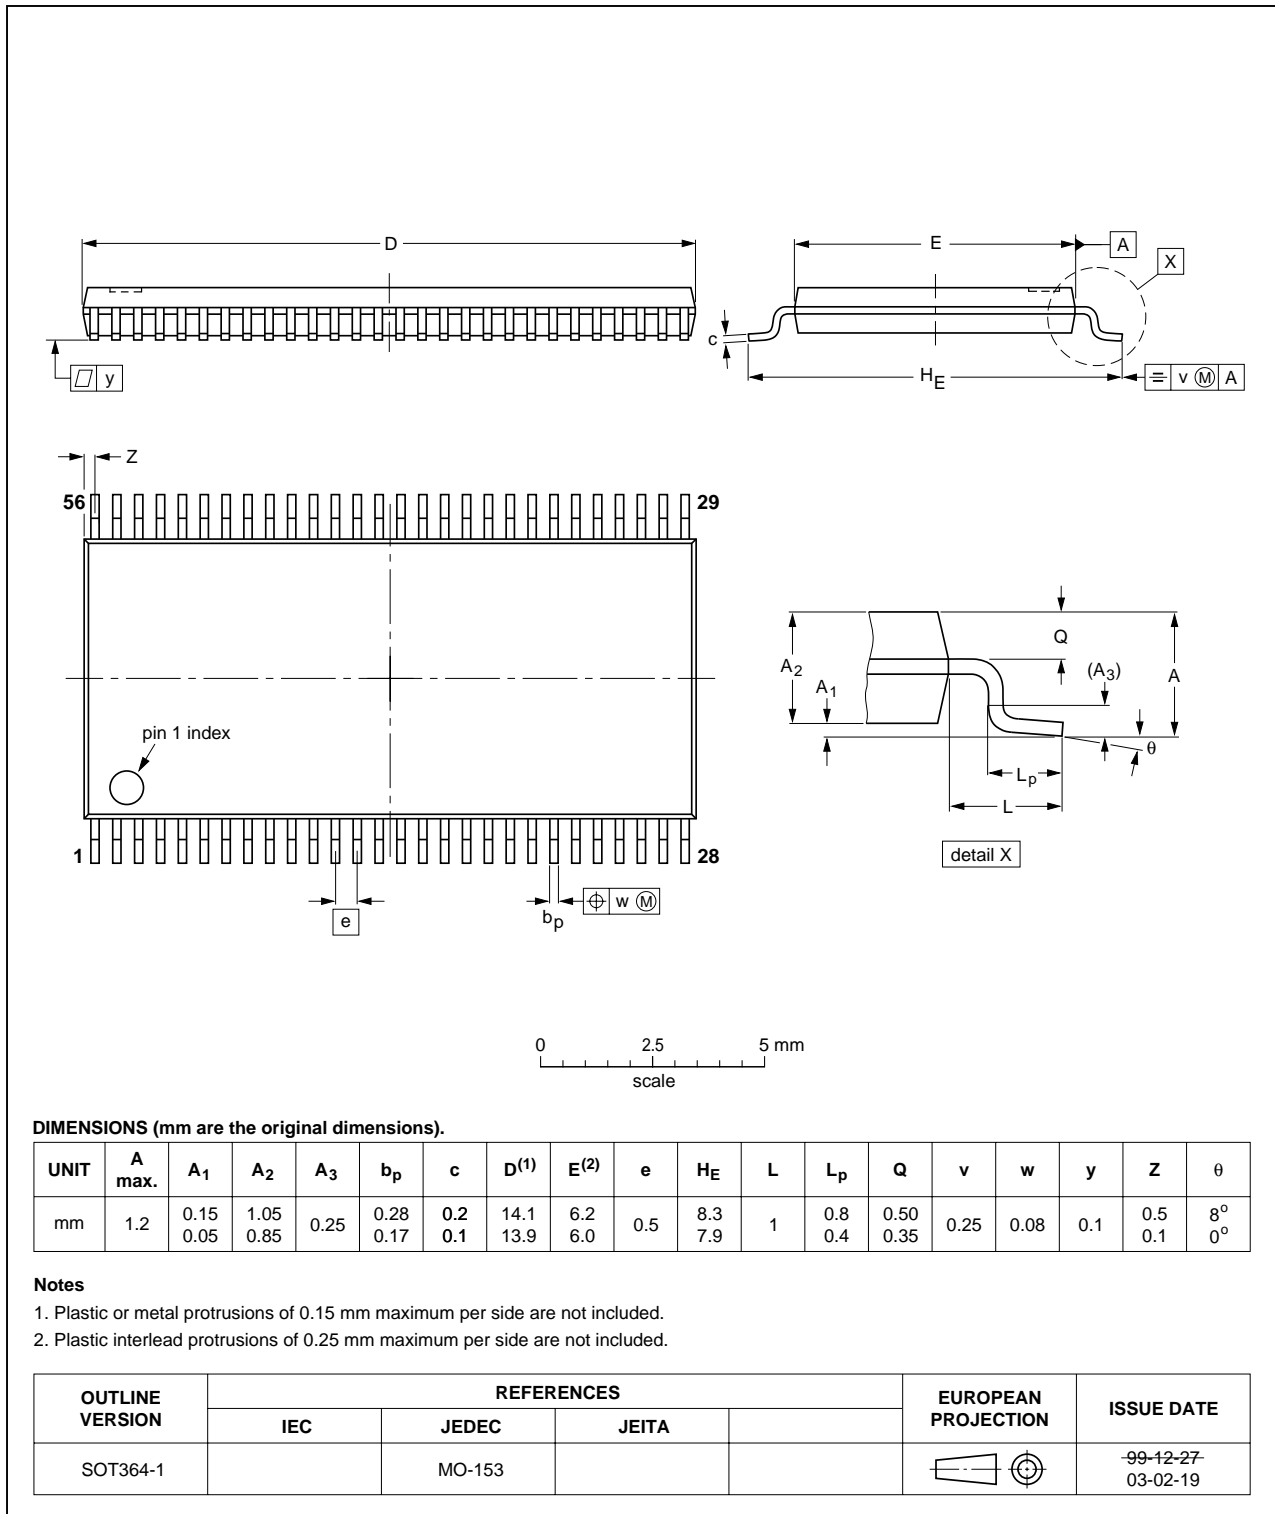


Fig 12. Package outline SOT364-1 (TSSOP56)

SSOP56: plastic shrink small outline package; 56 leads; body width 7.5 mm

SOT371-1

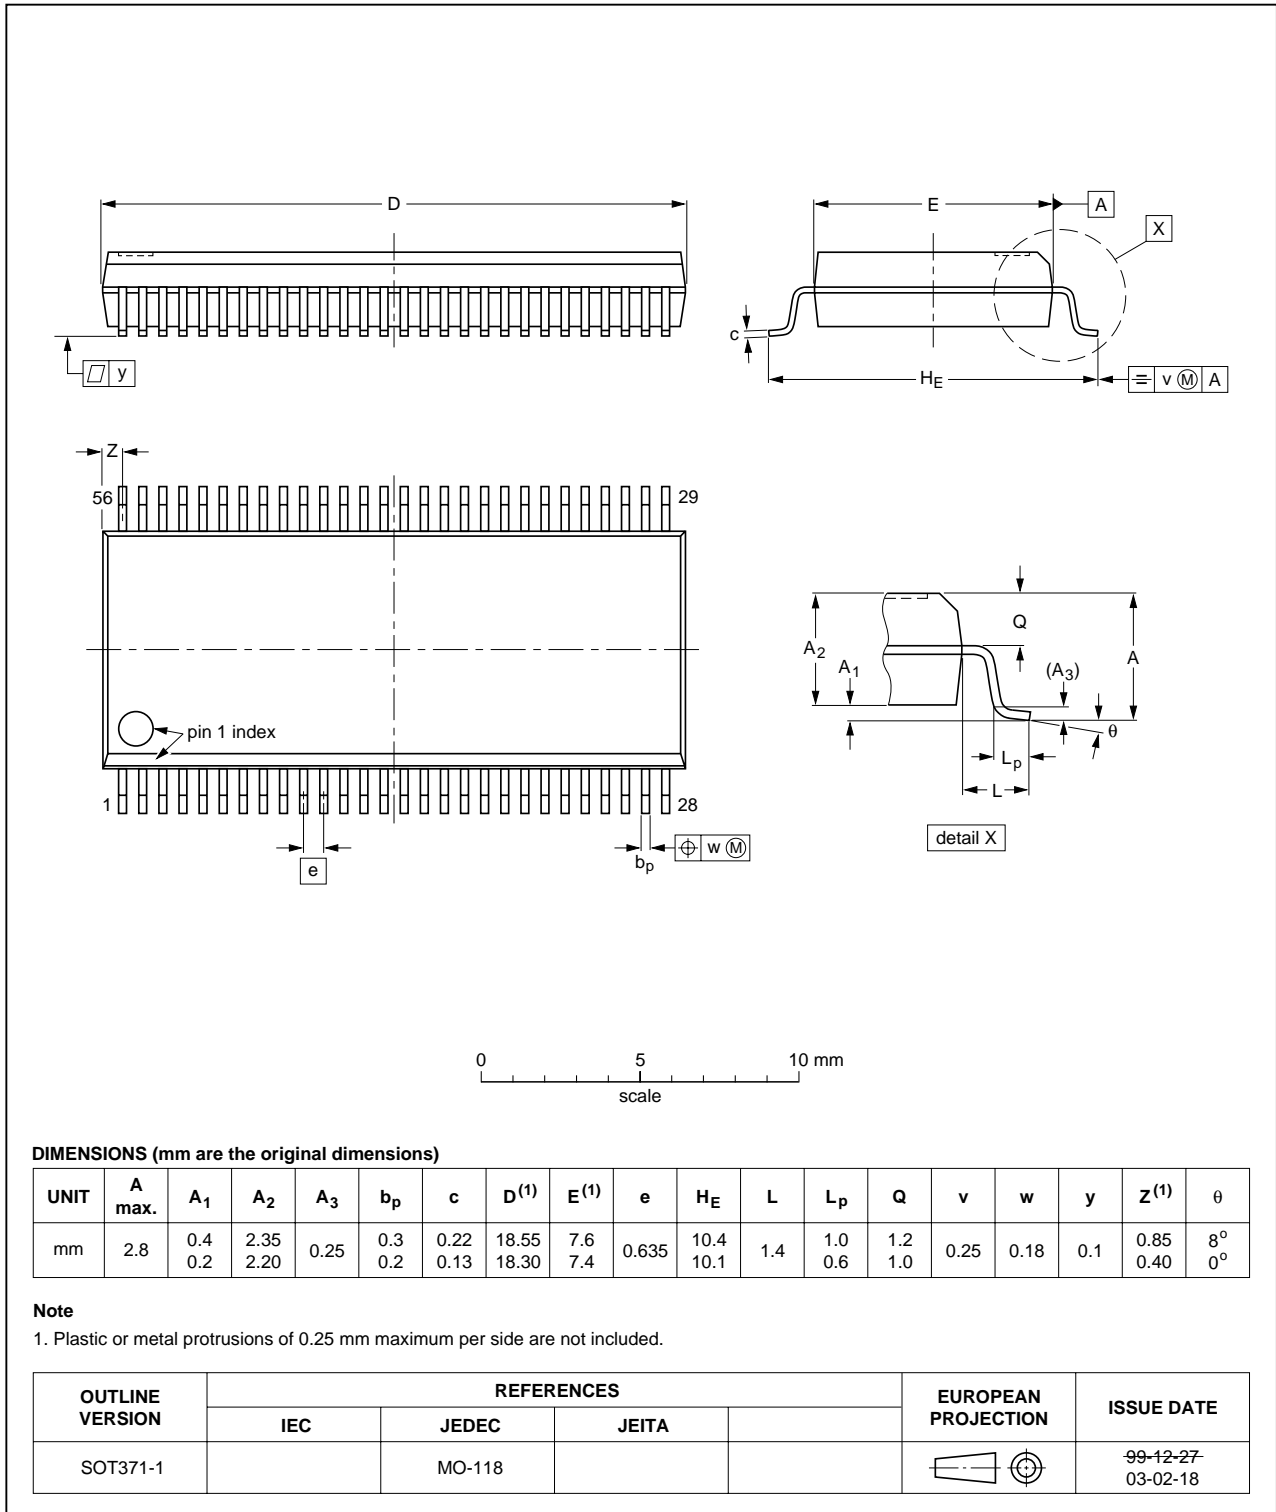


Fig 13. Package outline SOT371-1 (SSOP56)

13. Abbreviations

Table 10. Abbreviations

| Acronym | Description |
|---------|---|
| BiCMOS | Bipolar Complementary Metal Oxide Semiconductor |
| DUT | Device Under Test |
| ESD | ElectroStatic Discharge |
| TTL | Transistor-Transistor Logic |

14. Revision history

Table 11. Revision history

| Document ID | Release date | Data sheet status | Change notice | Supersedes |
|-----------------------------------|--|-----------------------|---------------|---------------|
| 74LVT16500A_3 | 20060529 | Product data sheet | - | 74LVT16500A_2 |
| Modifications: | <ul style="list-style-type: none"> The format of this data sheet has been redesigned to comply with the new presentation and information standard of Philips Semiconductors Section 2 “Features”: replaced JEDEC JC40.2 Std 17 with JESD78 Figure 3 “Logic diagram”: corrected clock names and pin names Table 7 “Dynamic characteristics”: splitting up $t_{su(H)}$ and $t_{su(L)}$ parameter ‘An to LEAB or Bn to LEBA’ in 2 parameters with clock conditions and new values | | | |
| 74LVT16500A_2 (9397 750 03556) | 19980219 | Product specification | - | 74LVT16500A_1 |
| 74LVT16500A_1 | 19970612 | Product specification | - | 74LVT16500A |
| 74LVT16500A | 19950320 | Product specification | - | - |

15. Legal information

15.1 Data sheet status

| Document status ^{[1][2]} | Product status ^[3] | Definition |
|-----------------------------------|-------------------------------|---|
| Objective [short] data sheet | Development | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet | Qualification | This document contains data from the preliminary specification. |
| Product [short] data sheet | Production | This document contains the product specification. |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.semiconductors.philips.com>.

15.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Philips Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Philips Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

15.3 Disclaimers

General — Information in this document is believed to be accurate and reliable. However, Philips Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — Philips Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Philips Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or

malfunction of a Philips Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Philips Semiconductors accepts no liability for inclusion and/or use of Philips Semiconductors products in such equipment or applications and therefore such inclusion and/or use is for the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — Philips Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.semiconductors.philips.com/profile/terms>, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by Philips Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

15.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

16. Contact information

For additional information, please visit: <http://www.semiconductors.philips.com>

For sales office addresses, send an email to: sales.addresses@www.semiconductors.philips.com

17. Contents

| | | |
|-----------|---|-----------|
| 1 | General description | 1 |
| 2 | Features | 1 |
| 3 | Ordering information | 2 |
| 4 | Functional diagram | 2 |
| 5 | Pinning information | 4 |
| 5.1 | Pinning | 4 |
| 5.2 | Pin description | 4 |
| 6 | Functional description | 6 |
| 7 | Limiting values | 7 |
| 8 | Recommended operating conditions | 7 |
| 9 | Static characteristics | 8 |
| 10 | Dynamic characteristics | 9 |
| 11 | Waveforms | 11 |
| 12 | Package outline | 15 |
| 13 | Abbreviations | 17 |
| 14 | Revision history | 17 |
| 15 | Legal information | 18 |
| 15.1 | Data sheet status | 18 |
| 15.2 | Definitions | 18 |
| 15.3 | Disclaimers | 18 |
| 15.4 | Trademarks | 18 |
| 16 | Contact information | 18 |
| 17 | Contents | 19 |



Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© Koninklijke Philips Electronics N.V. 2006. All rights reserved.

For more information, please visit: <http://www.semiconductors.philips.com>.

For sales office addresses, email to: sales.addresses@www.semiconductors.philips.com.

Date of release: 29 May 2006

Document identifier: 74LVT16500A_3

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

[View 74LVT16500ADGG,112 on WIN SOURCE](#)

[NXP / Nexperia Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management