



# THE DATASHEET OF TS942BIN



## Output rail-to-rail micropower operational amplifiers

### Features

- Rail-to-rail output voltage swing
- Micropower consumption (1.2  $\mu\text{A}$ )
- Single supply operation (2.5 V to 10 V)
- CMOS inputs
- Ultra low input bias current (1 pA)
- ESD protection (2 kV)
- Latch-up immunity (class A)
- Available in SOT23-5 micropackage

### Applications


- Battery-powered systems (alarm)
- Portable communication systems (paggers)
- Smoke/gas/fire detectors
- Instrumentation and sensing
- PH meter

### Description

The TS94x (single, dual and quad) series are operational amplifiers characterized for 2.5 V to 10 V operation over a  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  temperature range.

They exhibit excellent consumption  $-1.2\ \mu\text{A}$ , while featuring 10 kHz gain bandwidth product, 1.5 mA output capability and output rail-to-rail operation  $-2.85\ \text{V}$  typical at 3 V with  $R_L=10\ \text{k}\Omega$

The TS94x op-amps are ideal for battery-powered systems, where very low supply current and output rail-to-rail are required. Their very low  $-1\ \text{pA}$  typical input bias current and constant supply current over supply voltage enhance the devices' performance near the end of the battery charge or battery life.

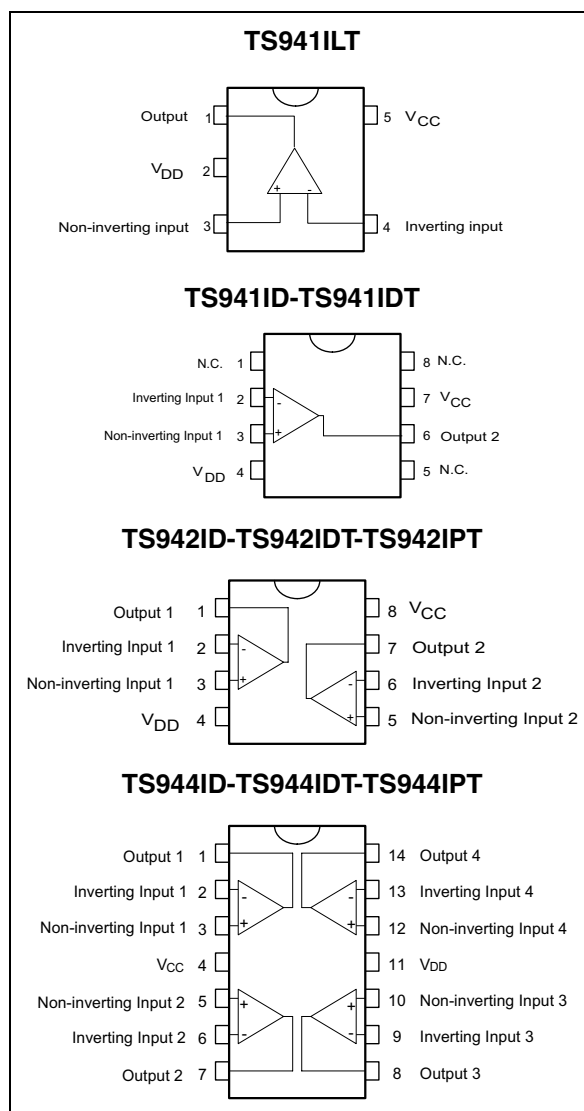

**Table 1. Device summary**

| Reference | Selection on offset voltage |
|-----------|-----------------------------|
| TS94x     | TS941, TS942, TS944         |
| TS94xA    | TS941A, TS942A, TS944A      |
| TS94xB    | TS941B, TS942B, TS944B      |

# 1 Absolute maximum ratings and operating conditions

**Table 2. Absolute maximum ratings**

| Symbol     | Parameter   | Value                        | Unit |
|------------|---|------------------------------|------|
| $V_{CC}$   | Supply voltage <sup>(1)</sup>                         | 12                           | V    |
| $V_{id}$   | Differential input voltage <sup>(2)</sup>             | $\pm V_{CC}$                 | V    |
| $V_{in}$   | Input voltage range <sup>(3)</sup>                    | $V_{DD}-0.3$ to $V_{CC}+0.3$ | V    |
| $T_{stg}$  | Storage temperature range                             | -65 to +150                  | °C   |
| $T_j$      | Maximum junction temperature                          | 150                          | °C   |
| $R_{thja}$ | Thermal resistance junction to ambient <sup>(4)</sup> |                              |      |
|            | SOT23-5   | 250                          | °C/W |
|            | SO-8  | 125                          |      |
|            | SO-14   | 103                          |      |
|            | TSSOP8  | 120                          |      |
| TSSOP14    | 100   |                              |      |
| $R_{thjc}$ | Thermal resistance junction to case <sup>(4)</sup>    |                              |      |
|            | SOT23-5   | 81                           | °C/W |
|            | SO-8  | 40                           |      |
|            | SO-14   | 31                           |      |
|            | TSSOP8  | 37                           |      |
| TSSOP14    | 32  |                              |      |
| ESD        | HBM: human body model <sup>(5)</sup>                  | 2                            | kV   |
|            | MM: machine model <sup>(6)</sup> (TS941, TS942)       | 200                          | V    |
|            | CDM: charged device model <sup>(7)</sup>              |                              |      |
|            | TS941 - TS944IDT                                      | 1.5                          | kV   |
|            | TS942 - TS944IPT                                      | 1                            |      |
|            | Latch-up immunity                                     | 200                          | mA   |
|            | Lead temperature (soldering, 10sec)                   | 250                          | °C   |

- All voltage values, except differential voltage are with respect to network terminal.
- Differential voltages are the non-inverting input terminal with respect to the inverting input terminal.
- The magnitude of input and output voltages must never exceed  $V_{CC} + 0.3$  V.
- Short-circuits can cause excessive heating and destructive dissipation.  $R_{th}$  are typical values.
- Human body model: a 100 pF capacitor is charged to the specified voltage, then discharged through a 1.5 k $\Omega$  resistor between two pins of the device. This is done for all couples of connected pin combinations while the other pins are floating.
- Machine model: a 200 pF capacitor is charged to the specified voltage, then discharged directly between two pins of the device with no external series resistor (internal resistor < 5  $\Omega$ ). This is done for all couples of connected pin combinations while the other pins are floating.
- Charged device model: all pins and the package are charged together to the specified voltage and then discharged directly to the ground through only one pin. This is done for all pins.

**Table 3. Operating conditions**

| Symbol     | Parameter                            | Value                            | Unit |
|------------|--------------------------------------|----------------------------------|------|
| $V_{CC}$   | Supply voltage                       | 2.5 to 10                        | V    |
| $V_{icm}$  | Common mode input voltage range      | $V_{DD} - 0.2$ to $V_{CC} - 1.3$ | V    |
| $T_{oper}$ | Operating free air temperature range | -40 to + 85                      | °C   |

## 2 Electrical characteristics

**Table 4.**  $V_{CC} = +2.5\text{ V}$ ,  $V_{DD} = 0\text{ V}$ ,  $R_L$  connected to  $V_{CC}/2$ ,  $T_{amb} = 25^\circ\text{ C}$   
(unless otherwise specified)

| Symbol          | Parameter   | Min.        | Typ.        | Max.         | Unit                         |
|-----------------|---|-------------|-------------|--------------|------------------------------|
| $V_{io}$        | Input offset voltage<br>TS941/2/4<br>TS941/2/4A<br>TS941/2/4B   |             |             | 10<br>5<br>2 | mV                           |
| $\Delta V_{io}$ | Input offset voltage drift  |             | 7           |              | $\mu\text{V}/^\circ\text{C}$ |
| $I_{io}$        | Input offset current <sup>(1)</sup>   |             | 1           | 100          | pA                           |
| $I_{ib}$        | Input bias current <sup>(1)</sup>   |             | 1           | 150          | pA                           |
| CMR             | Common mode rejection ratio   | 60          | 85          |              | dB                           |
| SVR             | Supply voltage rejection ratio  | 50          | 78          |              | dB                           |
| $A_{vd}$        | Large signal voltage gain<br>$V_O = 2 V_{pp}$ , $R_L = 1\text{ M}\Omega$  |             | 100         |              | dB                           |
| $V_{OH}$        | High level output voltage<br>$V_{ID} = 100\text{ mV}$ , $R_L = 1\text{ M}\Omega$<br>$R_L = 10\text{ k}\Omega$                           | 2.45<br>2.3 | 2.49<br>2.4 |              | V                            |
| $V_{OL}$        | Low level output voltage<br>$V_{ID} = -100\text{ mV}$ , $R_L = 1\text{ M}\Omega$<br>$R_L = 10\text{ k}\Omega$                           |             | 1<br>100    | 5<br>200     | mV                           |
| $I_o$           | Output source current<br>$V_{ID} = 100\text{ mV}$ , $V_O = V_{DD}$<br>Output sink current<br>$V_{ID} = -100\text{ mV}$ , $V_O = V_{CC}$ | 350<br>280  | 650<br>500  |              | $\mu\text{A}$                |
| $I_{CC}$        | Supply current (per amplifier), $A_{VCL} = 1$ , no load   |             | 1.2         | 1.8          | $\mu\text{A}$                |
| GBP             | Gain bandwidth product, $R_L = 1\text{ M}\Omega$ , $C_L = 50\text{ pF}$   |             | 10          |              | kHz                          |
| SR              | Slew rate, $R_L = 1\text{ M}\Omega$ , $C_L = 50\text{ pF}$  | 3           | 4.5         |              | V/ms                         |
| $\phi_m$        | Phase margin, $C_L = 50\text{ pF}$  |             | 65          |              | Degrees                      |

1. Maximum values include unavoidable inaccuracies of the industrial tests.

**Table 5.**  $V_{CC} = +3\text{ V}$ ,  $V_{DD} = 0\text{ V}$ ,  $R_L$  connected to  $V_{CC}/2$ ,  $T_{amb} = 25^\circ\text{ C}$   
(unless otherwise specified) <sup>(1)</sup>

| Symbol          | Parameter   | Min.       | Typ.         | Max.         | Unit                         |
|-----------------|---|------------|--------------|--------------|------------------------------|
| $V_{io}$        | Input offset voltage<br>TS941/2/4<br>TS941/2/4A<br>TS941/2/4B   |            |              | 10<br>5<br>2 | mV                           |
| $\Delta V_{io}$ | Input offset voltage drift  |            | 7            |              | $\mu\text{V}/^\circ\text{C}$ |
| $I_{io}$        | Input offset current <sup>(2)</sup>   |            | 1            | 100          | pA                           |
| $I_{ib}$        | Input bias current <sup>(2)</sup>   |            | 1            | 150          | pA                           |
| CMR             | Common mode rejection ratio   | 60         | 85           |              | dB                           |
| SVR             | Supply voltage rejection ratio  | 50         | 85           |              | dB                           |
| $A_{vd}$        | Large signal voltage gain<br>$V_O = 2 V_{pp}$ , $R_L = 1\text{ M}\Omega$  |            | 100          |              | dB                           |
| $V_{OH}$        | High level output voltage<br>$V_{ID} = 100\text{ mV}$ , $R_L = 1\text{ M}\Omega$<br>$R_L = 10\text{ k}\Omega$                           | 2.9<br>2.8 | 2.99<br>2.85 |              | V                            |
| $V_{OL}$        | Low level output voltage<br>$V_{ID} = -100\text{ mV}$ , $R_L = 1\text{ M}\Omega$<br>$R_L = 10\text{ k}\Omega$                           |            | 1<br>100     | 5<br>200     | mV                           |
| $I_o$           | Output source current<br>$V_{ID} = 100\text{ mV}$ , $V_O = V_{DD}$<br>Output sink current<br>$V_{ID} = -100\text{ mV}$ , $V_O = V_{CC}$ | 680<br>650 | 1500<br>1300 |              | $\mu\text{A}$                |
| $I_{CC}$        | Supply current (per amplifier), $A_{VCL} = 1$ , no load   |            | 1.2          | 1.8          | $\mu\text{A}$                |
| GBP             | Gain bandwidth product, $R_L = 1\text{ M}\Omega$ , $C_L = 50\text{ pF}$   |            | 10           |              | kHz                          |
| SR              | Slew rate, $R_L = 1\text{ M}\Omega$ , $C_L = 50\text{ pF}$  | 3          | 4.5          |              | V/ms                         |
| $\phi_m$        | Phase margin, $C_L = 50\text{ pF}$  |            | 65           |              | Degrees                      |

1. All electrical values are guaranteed with correlation measurements at 2.5 V and 5 V.


2. Maximum values include unavoidable inaccuracies of the industrial tests.

**Table 6.**  $V_{CC} = +5\text{ V}$ ,  $V_{DD} = 0\text{ V}$ ,  $R_L$  connected to  $V_{CC}/2$ ,  $T_{amb} = 25^\circ\text{ C}$   
(unless otherwise specified)


| Symbol          | Parameter   | Min.       | Typ.         | Max.         | Unit                         |
|-----------------|---|------------|--------------|--------------|------------------------------|
| $V_{io}$        | Input offset voltage<br>TS941/2/4<br>TS941/2/4A<br>TS941/2/4B   |            |              | 10<br>5<br>2 | mV                           |
| $\Delta V_{io}$ | Input offset voltage drift  |            | 7            |              | $\mu\text{V}/^\circ\text{C}$ |
| $I_{io}$        | Input offset current <sup>(1)</sup>   |            | 1            | 100          | pA                           |
| $I_{ib}$        | Input bias current <sup>(1)</sup>   |            | 1            | 150          | pA                           |
| CMR             | Common mode rejection ratio   | 60         | 85           |              | dB                           |
| SVR             | Supply voltage rejection ratio  | 50         | 85           |              | dB                           |
| $A_{vd}$        | Large signal voltage gain<br>$V_O = 2 V_{pp}$ , $R_L = 1\text{ M}\Omega$  |            | 100          |              | dB                           |
| $V_{OH}$        | High level output voltage<br>$V_{ID} = 100\text{ mV}$ , $R_L = 1\text{ M}\Omega$<br>$R_L = 10\text{ k}\Omega$                           | 4.9<br>4.8 | 4.99<br>4.85 |              | V                            |
| $V_{OL}$        | Low level output voltage<br>$V_{ID} = -100\text{ mV}$ , $R_L = 1\text{ M}\Omega$<br>$R_L = 10\text{ k}\Omega$                           |            | 1<br>100     | 5<br>150     | mV                           |
| $I_o$           | Output source current<br>$V_{ID} = 100\text{ mV}$ , $V_O = V_{DD}$<br>Output sink current<br>$V_{ID} = -100\text{ mV}$ , $V_O = V_{CC}$ | 3<br>3.7   | 4.5<br>5     |              | mA                           |
| $I_{CC}$        | Supply current (per amplifier), $A_{VCL} = 1$ , no load   |            | 1.2          | 1.85         | $\mu\text{A}$                |
| GBP             | Gain bandwidth product, $R_L = 1\text{ M}\Omega$ , $C_L = 50\text{ pF}$   |            | 10           |              | kHz                          |
| SR              | Slew rate, $R_L = 1\text{ M}\Omega$ , $C_L = 50\text{ pF}$  | 3          | 4.5          |              | V/ms                         |
| $\phi_m$        | Phase margin, $C_L = 50\text{ pF}$  |            | 65           |              | Degrees                      |

1. Maximum values include unavoidable inaccuracies of the industrial tests.


**Figure 1. Supply current per amplifier vs. supply voltage in overdrive**

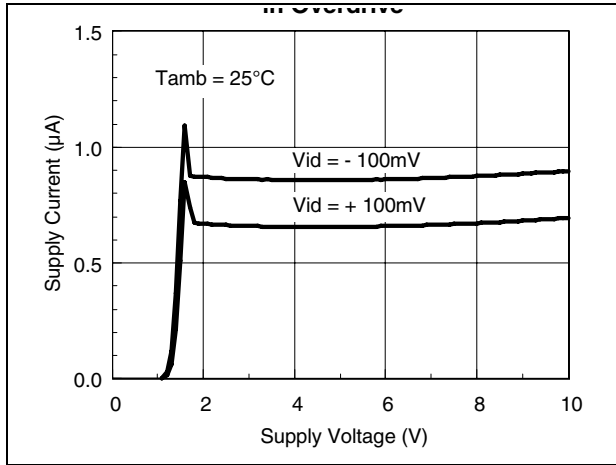


**Figure 2. Supply current per amplifier vs. supply voltage**

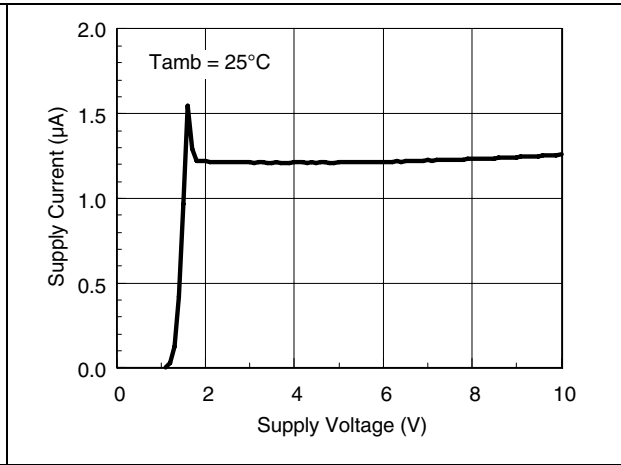


**Figure 3. Output short-circuit current vs. temperature**

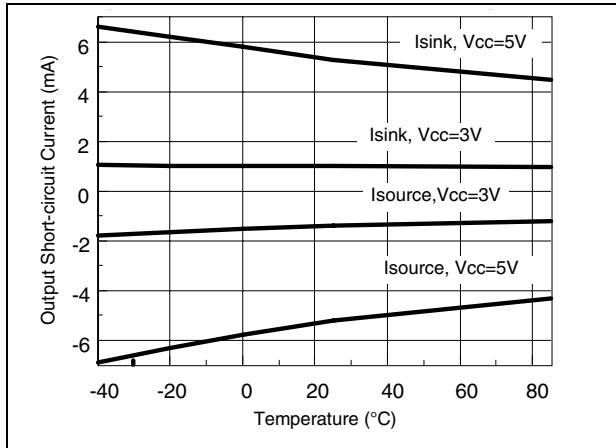


**Figure 4. Supply current per amplifier vs. temperature**

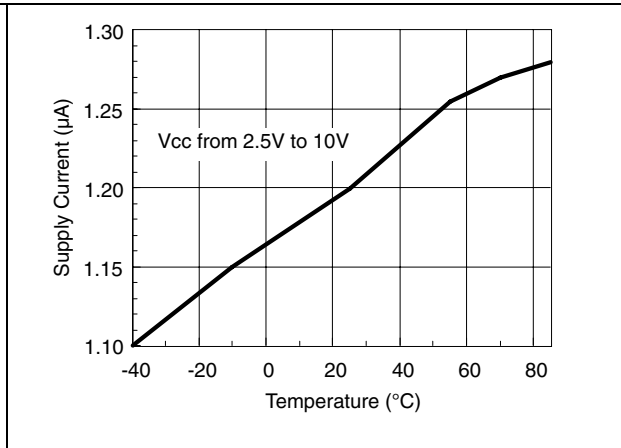


**Figure 5. Output short-circuit current vs. supply voltage**

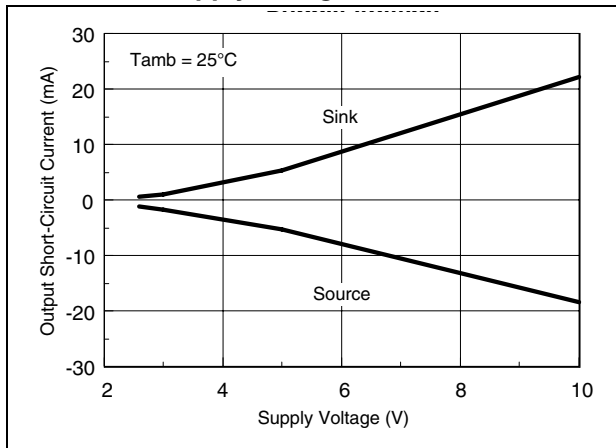


**Figure 6. Output short-circuit current vs. output voltage**

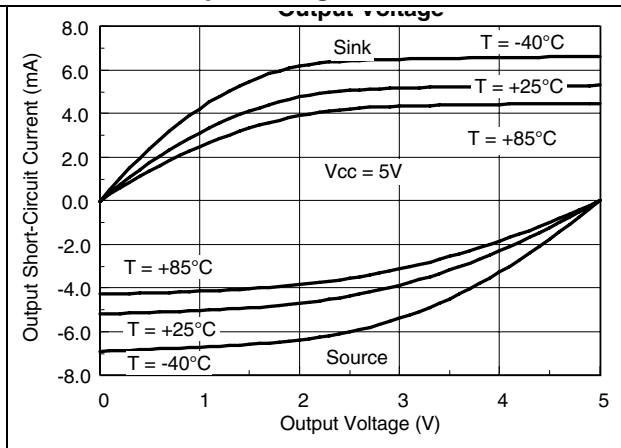


**Figure 7. Output short-circuit current vs. output voltage**

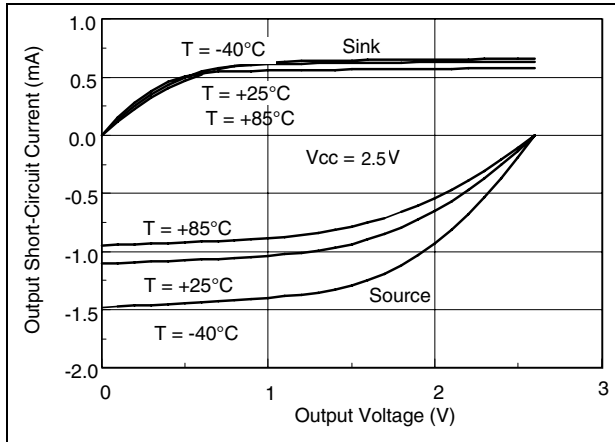


**Figure 8. High level output voltage vs. supply voltage**

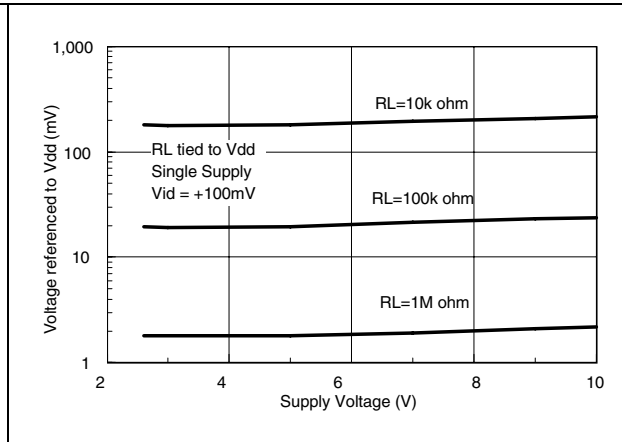


**Figure 9. Output short-circuit current vs. output voltage**

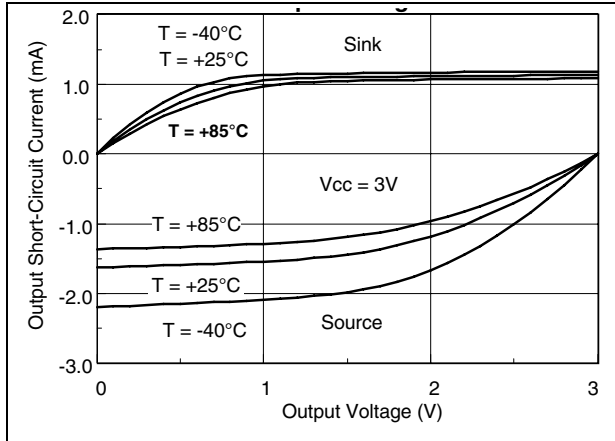

**Figure 10. Low level output voltage vs. supply voltage**

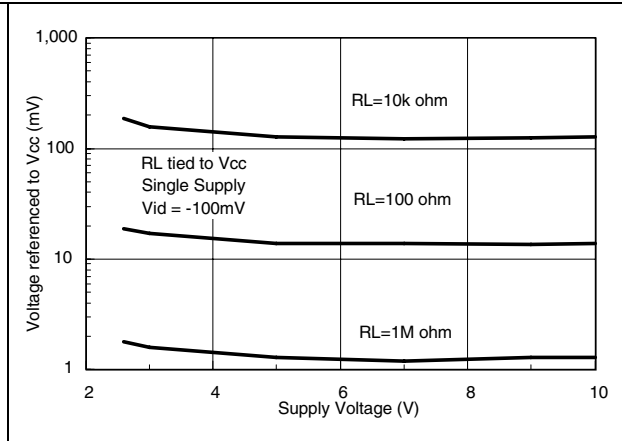

**Figure 11. Output short-circuit current vs. output voltage**

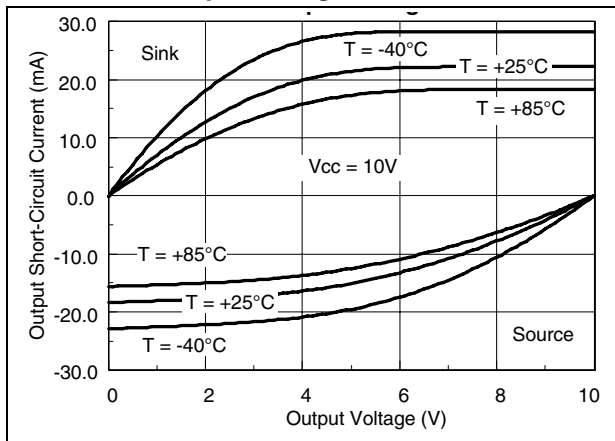

**Figure 12. Gain and phase vs. frequency**

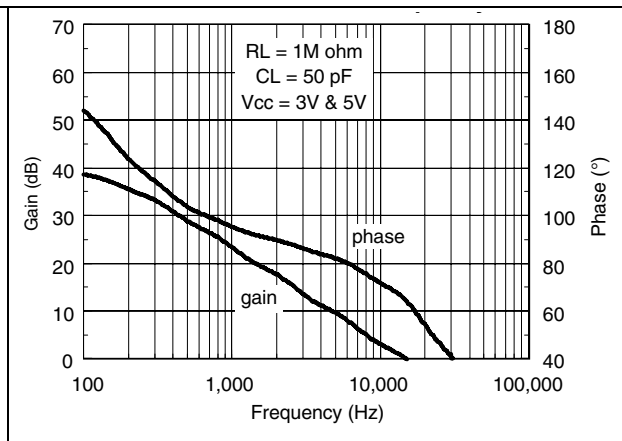


Figure 13. Small signal transient response

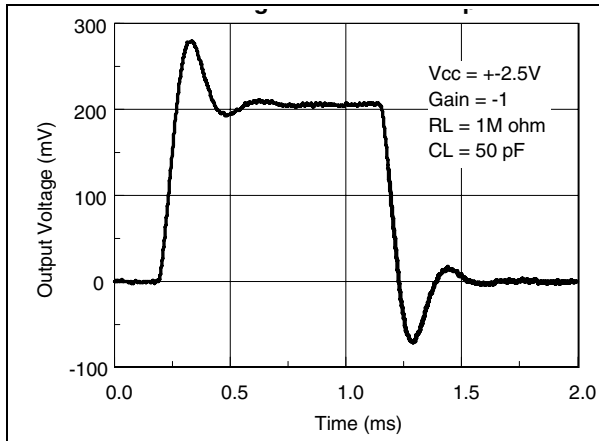


Figure 14. Gain and phase versus frequency

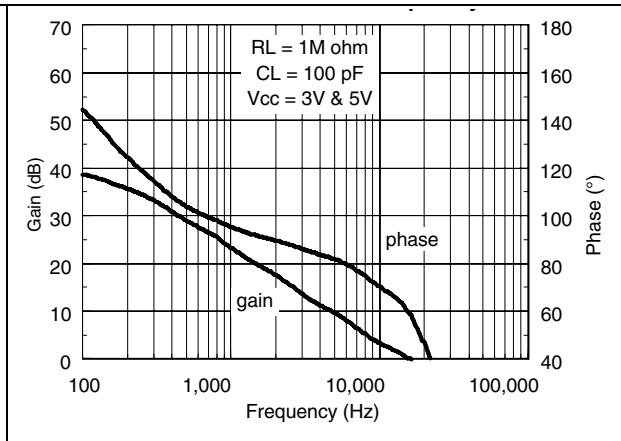


Figure 15. Slew rate positive and negative vs. temperature


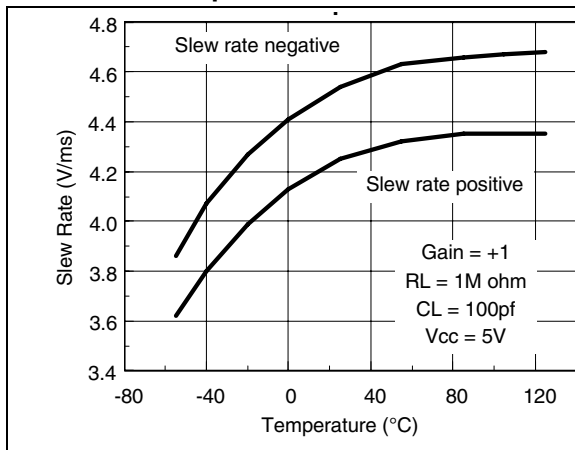


Figure 16. Large signal transient response

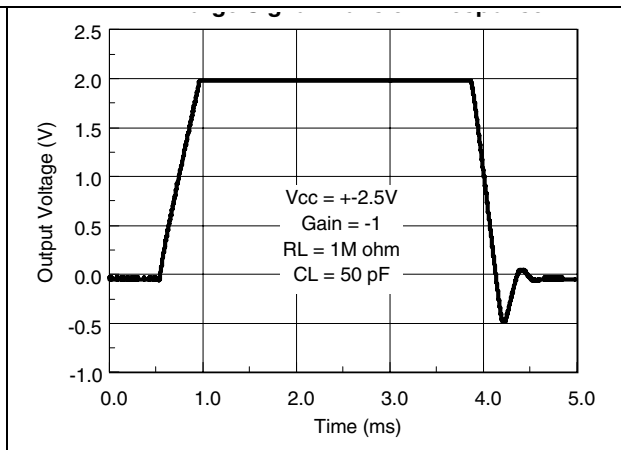

### 3 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK<sup>®</sup> packages, depending on their level of environmental compliance. ECOPACK<sup>®</sup> specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK<sup>®</sup> is an ST trademark.

### 3.1 SOT23-5 package information

Figure 17. SOT23-5 package mechanical drawing

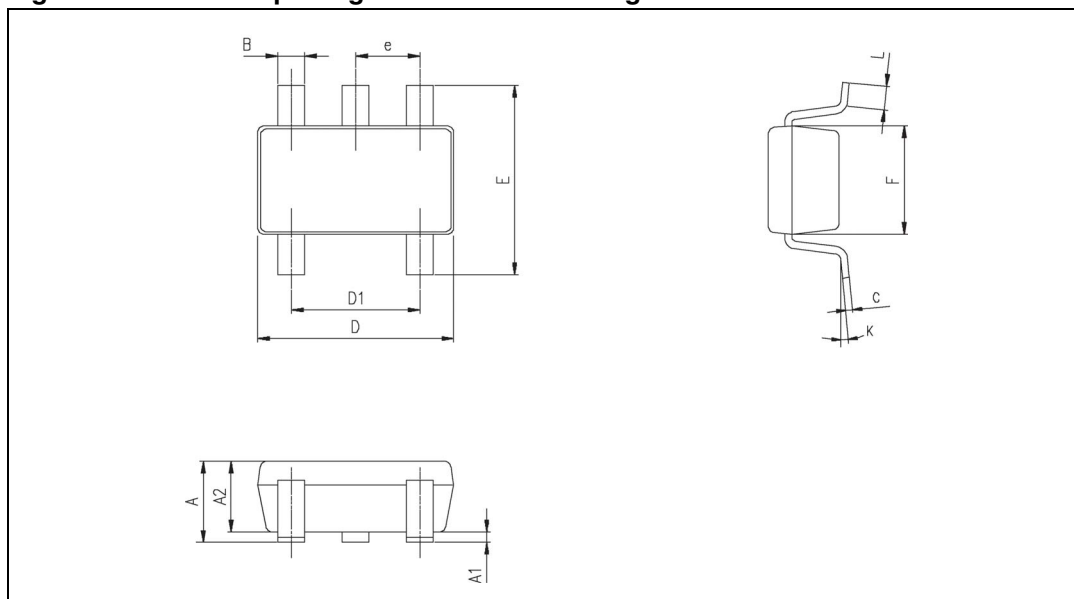


Table 7. SOT23-5 package mechanical data

| Ref. | Dimensions  |      |            |        |       |       |
|------|-------------|------|------------|--------|-------|-------|
|      | Millimeters |      |            | Inches |       |       |
|      | Min.        | Typ. | Max.       | Min.   | Typ.  | Max.  |
| A    | 0.90        | 1.20 | 1.45       | 0.035  | 0.047 | 0.057 |
| A1   |             |      | 0.15       |        |       | 0.006 |
| A2   | 0.90        | 1.05 | 1.30       | 0.035  | 0.041 | 0.051 |
| B    | 0.35        | 0.40 | 0.50       | 0.013  | 0.015 | 0.019 |
| C    | 0.09        | 0.15 | 0.20       | 0.003  | 0.006 | 0.008 |
| D    | 2.80        | 2.90 | 3.00       | 0.110  | 0.114 | 0.118 |
| D1   |             | 1.90 |            |        | 0.075 |       |
| e    |             | 0.95 |            |        | 0.037 |       |
| E    | 2.60        | 2.80 | 3.00       | 0.102  | 0.110 | 0.118 |
| F    | 1.50        | 1.60 | 1.75       | 0.059  | 0.063 | 0.069 |
| L    | 0.10        | 0.35 | 0.60       | 0.004  | 0.013 | 0.023 |
| K    | 0 degrees   |      | 10 degrees |        |       |       |

### 3.2 SO-8 package information

Figure 18. SO-8 package mechanical drawing

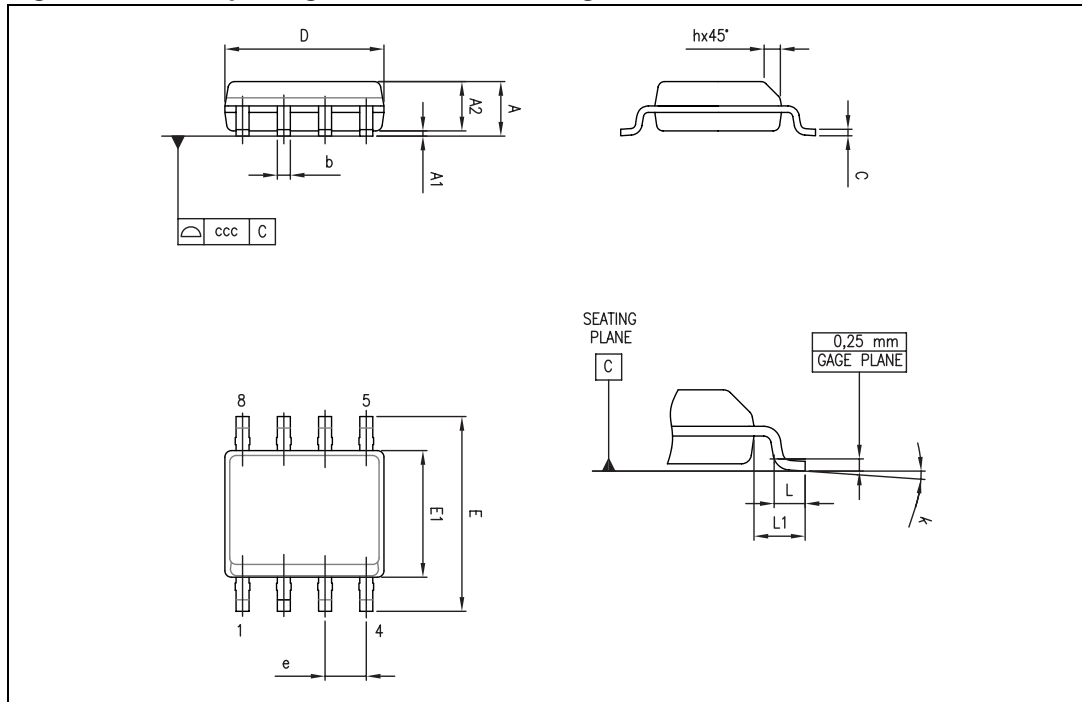


Table 8. SO-8 package mechanical data

| Ref. | Dimensions  |      |      |        |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Millimeters |      |      | Inches |       |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    |             |      | 1.75 |        |       | 0.069 |
| A1   | 0.10        |      | 0.25 | 0.004  |       | 0.010 |
| A2   | 1.25        |      |      | 0.049  |       |       |
| b    | 0.28        |      | 0.48 | 0.011  |       | 0.019 |
| c    | 0.17        |      | 0.23 | 0.007  |       | 0.010 |
| D    | 4.80        | 4.90 | 5.00 | 0.189  | 0.193 | 0.197 |
| E    | 5.80        | 6.00 | 6.20 | 0.228  | 0.236 | 0.244 |
| E1   | 3.80        | 3.90 | 4.00 | 0.150  | 0.154 | 0.157 |
| e    |             | 1.27 |      |        | 0.050 |       |
| h    | 0.25        |      | 0.50 | 0.010  |       | 0.020 |
| L    | 0.40        |      | 1.27 | 0.016  |       | 0.050 |
| L1   |             | 1.04 |      |        | 0.040 |       |
| k    | 0           |      | 8°   | 1°     |       | 8°    |
| ccc  |             |      | 0.10 |        |       | 0.004 |

### 3.3 TSSOP8 package information

Figure 19. TSSOP8 package mechanical drawing

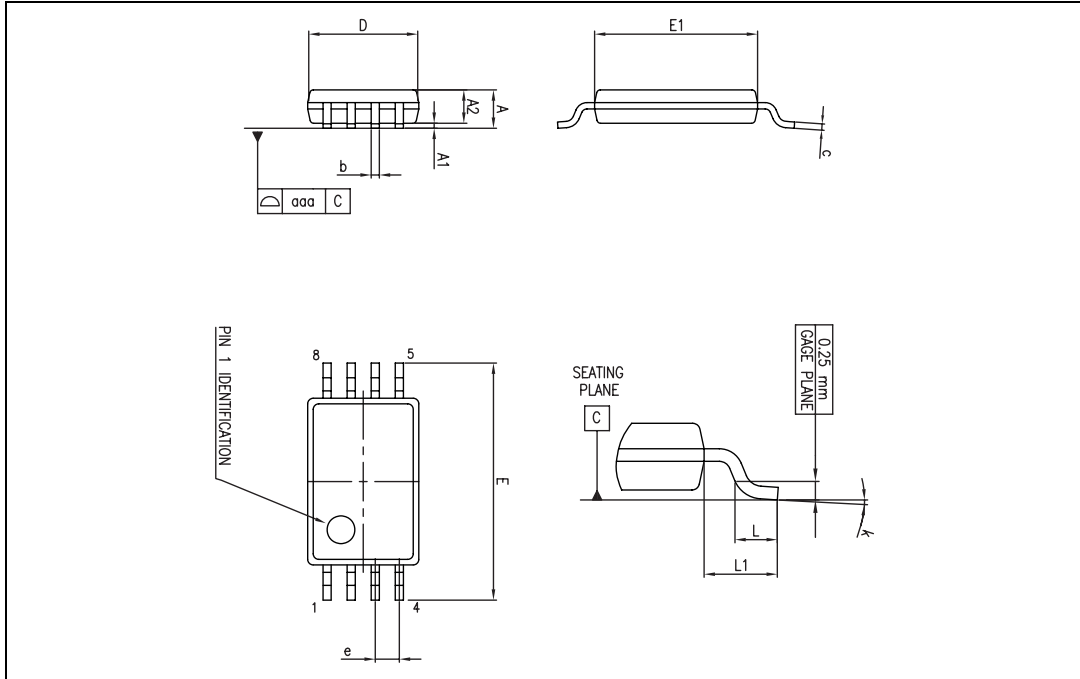


Table 9. TSSOP8 package mechanical data

| Ref. | Dimensions  |      |      |        |        |       |
|------|-------------|------|------|--------|--------|-------|
|      | Millimeters |      |      | Inches |        |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.   | Max.  |
| A    |             |      | 1.20 |        |        | 0.047 |
| A1   | 0.05        |      | 0.15 | 0.002  |        | 0.006 |
| A2   | 0.80        | 1.00 | 1.05 | 0.031  | 0.039  | 0.041 |
| b    | 0.19        |      | 0.30 | 0.007  |        | 0.012 |
| c    | 0.09        |      | 0.20 | 0.004  |        | 0.008 |
| D    | 2.90        | 3.00 | 3.10 | 0.114  | 0.118  | 0.122 |
| E    | 6.20        | 6.40 | 6.60 | 0.244  | 0.252  | 0.260 |
| E1   | 4.30        | 4.40 | 4.50 | 0.169  | 0.173  | 0.177 |
| e    |             | 0.65 |      |        | 0.0256 |       |
| k    | 0°          |      | 8°   | 0°     |        | 8°    |
| L    | 0.45        | 0.60 | 0.75 | 0.018  | 0.024  | 0.030 |
| L1   |             | 1    |      |        | 0.039  |       |
| aaa  |             |      | 0.10 |        |        | 0.004 |

### 3.4 SO-14 package information

Figure 20. SO-14 package mechanical drawing

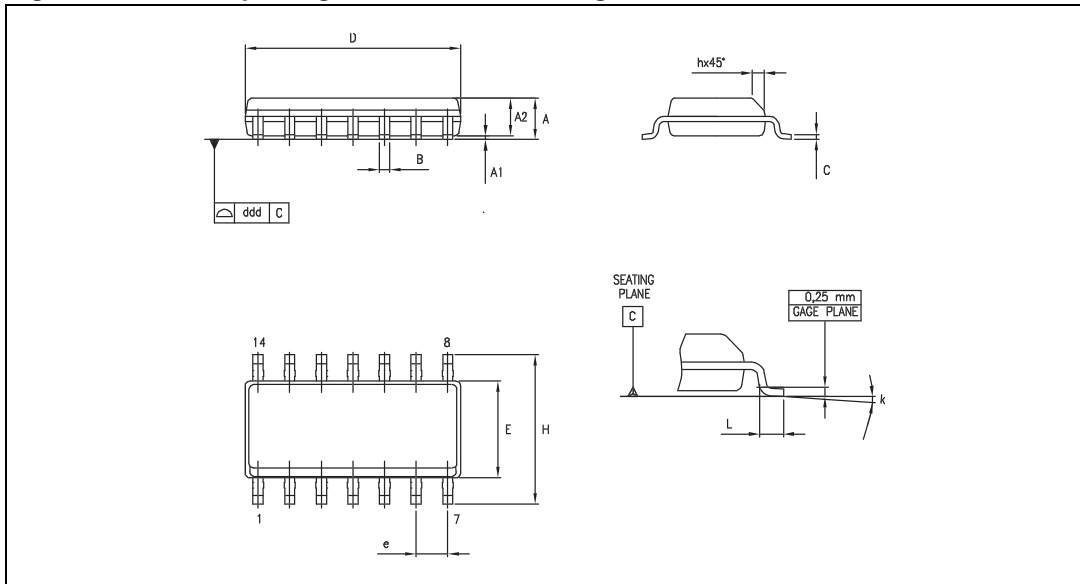


Table 10. SO-14 package mechanical data

| Dimensions |             |      |      |        |      |       |
|------------|-------------|------|------|--------|------|-------|
| Ref.       | Millimeters |      |      | Inches |      |       |
|            | Min.        | Typ. | Max. | Min.   | Typ. | Max.  |
| A          | 1.35        |      | 1.75 | 0.05   |      | 0.068 |
| A1         | 0.10        |      | 0.25 | 0.004  |      | 0.009 |
| A2         | 1.10        |      | 1.65 | 0.04   |      | 0.06  |
| B          | 0.33        |      | 0.51 | 0.01   |      | 0.02  |
| C          | 0.19        |      | 0.25 | 0.007  |      | 0.009 |
| D          | 8.55        |      | 8.75 | 0.33   |      | 0.34  |
| E          | 3.80        |      | 4.0  | 0.15   |      | 0.15  |
| e          |             | 1.27 |      |        | 0.05 |       |
| H          | 5.80        |      | 6.20 | 0.22   |      | 0.24  |
| h          | 0.25        |      | 0.50 | 0.009  |      | 0.02  |
| L          | 0.40        |      | 1.27 | 0.015  |      | 0.05  |
| k          | 8° (max.)   |      |      |        |      |       |
| ddd        |             |      | 0.10 |        |      | 0.004 |

### 3.5 TSSOP14 package information

Figure 21. TSSOP14 package mechanical drawing

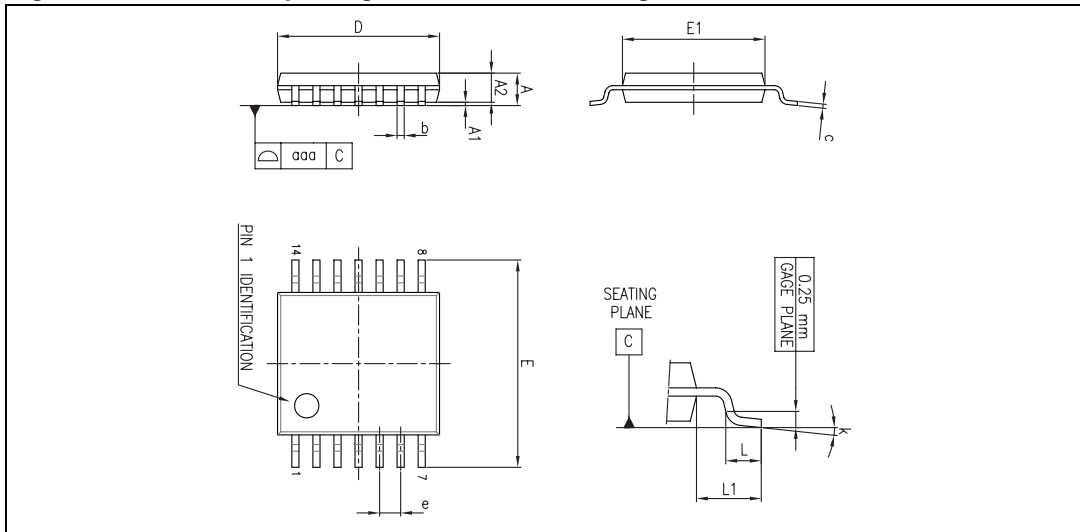


Table 11. TSSOP14 package mechanical data

| Ref. | Dimensions  |      |      |        |        |        |
|------|-------------|------|------|--------|--------|--------|
|      | Millimeters |      |      | Inches |        |        |
|      | Min.        | Typ. | Max. | Min.   | Typ.   | Max.   |
| A    |             |      | 1.20 |        |        | 0.047  |
| A1   | 0.05        |      | 0.15 | 0.002  | 0.004  | 0.006  |
| A2   | 0.80        | 1.00 | 1.05 | 0.031  | 0.039  | 0.041  |
| b    | 0.19        |      | 0.30 | 0.007  |        | 0.012  |
| c    | 0.09        |      | 0.20 | 0.004  |        | 0.0089 |
| D    | 4.90        | 5.00 | 5.10 | 0.193  | 0.197  | 0.201  |
| E    | 6.20        | 6.40 | 6.60 | 0.244  | 0.252  | 0.260  |
| E1   | 4.30        | 4.40 | 4.50 | 0.169  | 0.173  | 0.176  |
| e    |             | 0.65 |      |        | 0.0256 |        |
| L    | 0.45        | 0.60 | 0.75 | 0.018  | 0.024  | 0.030  |
| L1   |             | 1.00 |      |        | 0.039  |        |
| k    | 0°          |      | 8°   | 0°     |        | 8°     |
| aaa  |             |      | 0.10 |        |        | 0.004  |

## 4 Ordering information

**Table 12. Order codes**

| Order code            | Temperature range | Package  | Packaging              | Marking               |
|-----------------------|-------------------|----------|------------------------|-----------------------|
| TS941ID<br>TS941IDT   | -40°C to +85°C    | SO-8     | Tube or<br>Tape & reel | TS941ID<br>TS941IDT   |
| TS941AID<br>TS941AIDT |                   |          |                        | TS941AID              |
| TS941BID<br>TS941BIDT |                   |          |                        | TS941BID              |
| TS941ILT              |                   | SOT23-5L | Tape & reel            | K201                  |
| TS941AILT             |                   |          |                        | K202                  |
| TS941BILT             |                   |          |                        | K203                  |
| TS942ID<br>TS942IDT   |                   | SO-8     | Tube or<br>Tape & reel | TS942ID<br>TS942IDT   |
| TS942AID<br>TS942AIDT |                   |          |                        | TS942AID              |
| TS942BID<br>TS942BIDT |                   |          |                        | TS942BID              |
| TS942IPT              |                   | TSSOP8   | Tape & reel            | TS942                 |
| TS942AIPT             |                   |          |                        | 942AI                 |
| TS942BIPT             |                   |          |                        | 942BI                 |
| TS944ID<br>TS944IDT   |                   | SO-14    | Tube or<br>Tape & reel | TS944ID<br>TS944IDT   |
| TS944AID<br>TS944AIDT |                   |          |                        | TS944AID<br>TS944AIDT |
| TS944BID<br>TS944BIDT |                   |          |                        | TS944BID<br>TS944BIDT |
| TS944IPT              |                   | TSSOP14  | Tape & reel            | TS944IPT              |
| TS944AIPT             |                   |          |                        | TS944AI               |
| TS944BIPT             |                   |          |                        | TS944BI               |

## 5 Revision history

**Table 13. Document revision history**

| Date        | Revision | Changes   |
|-------------|----------|---|
| 01-Dec-2001 | 1        | Initial release.  |
| 01-Dec-2004 | 2        | Modifications on AMR table (explanation of $V_{id}$ and $V_{in}$ limits).   |
| 13-Mar-2008 | 3        | CDM values added for TS944 in SO and TSSOP packages.<br>Document reformatted.   |
| 09-Apr-2008 | 4        | Corrected error in power consumption on cover page (1.2 $\mu$ A, not 1.2mA).  |
| 05-Mar-2009 | 5        | Removed DIP package information and order codes in <a href="#">Chapter 3</a> and <a href="#">Chapter 4</a> .<br>Updated all other package mechanical drawings and data in <a href="#">Chapter 3</a> . |
| 06-Oct-2009 | 6        | Added root part numbers (TS94xA, TS94xB) and <a href="#">Table 1: Device summary</a> on cover page.   |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2009 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View TS942BIN](#) on WIN SOURCE
- ⊖ [STMicroelectronics](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management