

Description


The SP490 is a low power differential line driver/receiver meeting RS-485 and RS-422 standards up to 5Mbps. The SP491 is identical to the SP490 with the addition of driver and receiver tri-state enable lines. Both products feature $\pm 200\text{mV}$ receiver input sensitivity, over wide common mode range. The SP490 is available in 8-pin NSOIC packages for operation over the commercial temperature range. The SP491 is available in 14-pin NSOIC packages for operation over the commercial and industrial temperature ranges.

FEATURES


- 5V only
- Low power BiCMOS
- Driver/receiver enable (SP491)
- RS-485 and RS-422 drivers/receivers
- Pin compatible with LTC490 and SN75179 (SP490)
- Pin compatible with LTC491 and SN75180 (SP491)

Ordering Information - [Back Page](#)

Block Diagrams

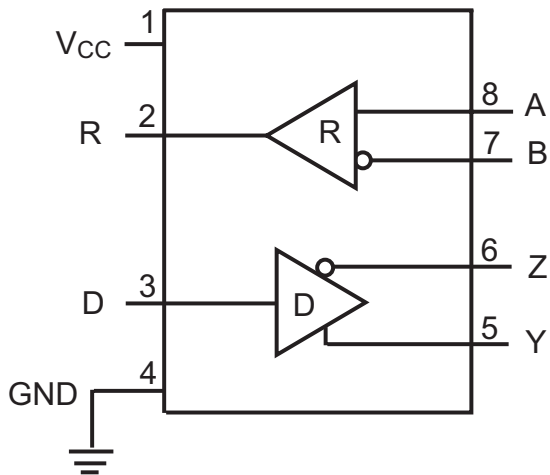

SP490

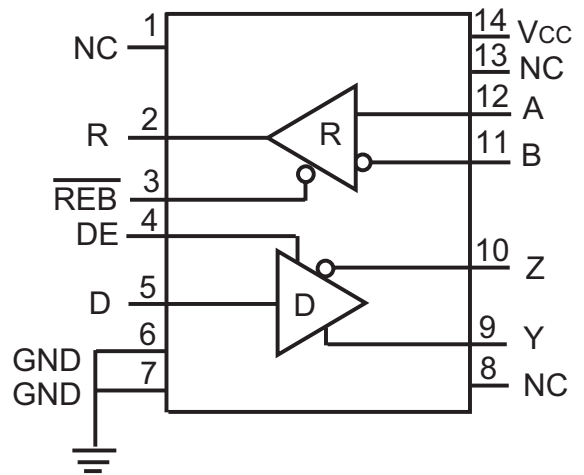

SP491

Absolute Maximum Ratings (SP490)

These are stress ratings only and functional operation of the device at these ratings or any other above those indicated in the operation sections of the specifications below is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

V_{CC}7.0V

Input Voltages

Drivers.....-0.5V to ($V_{CC}+0.5V$)

Receivers..... $\pm 14V$

Output Voltages

Drivers..... $\pm 14V$

Receivers.....-0.5V to ($V_{CC}+0.5V$)

Storage Temperature.....-65°C to +150°C

Power Dissipation.....1000mW

Electrical Characteristics

$T_{AMB} = T_{MIN}$ to T_{MAX} and $V_{CC} = 5V \pm 5\%$ unless otherwise noted.

| PARAMETERS | MIN. | TYP. | MAX. | UNITS | CONDITIONS |
|--|------|------|-----------|---------|--|
| SP490 Driver DC Characteristics | | | | | |
| Differential output voltage | | | V_{CC} | V | Unloaded; $R = \infty\Omega$; Figure 1 |
| Differential output voltage | 2 | | V_{CC} | V | With load; $R = 50\Omega$ (RS-422); Figure 1 |
| Differential output voltage | 1.5 | | V_{CC} | V | With load; $R = 27\Omega$ (RS-485); Figure 1 |
| Change in magnitude of driver differential output voltage for complimentary states | | | 0.2 | V | $R = 27\Omega$ or $R = 50\Omega$; Figure 1 |
| Driver common-mode output voltage | | | 3 | V | $R = 27\Omega$ or $R = 50\Omega$; Figure 1 |
| Input high voltage | 2.0 | | | V | Applies to D |
| Input low voltage | | | 0.8 | V | Applies to D |
| Input current | | | ± 10 | μA | Applies to D |
| Driver short circuit current $V_{OUT} = HIGH$ | | | ± 250 | mA | $-7V \leq V_O \leq 12V$ |
| Driver short circuit current $V_{OUT} = LOW$ | | | ± 250 | mA | $-7V \leq V_O \leq 12V$ |
| SP490 Driver AC Characteristics | | | | | |
| Maximum data rate | 5 | | | Mbps | |
| Driver input to output, t_{PLH} | | 30 | 60 | ns | $R_{DIFF} = 54\Omega$, $C_{L1} = C_{L2} = 100pF$; Figures 3 & 5 |
| Driver input to output, t_{PHL} | | 30 | 60 | ns | $R_{DIFF} = 54\Omega$, $C_{L1} = C_{L2} = 100pF$; Figures 3 & 5 |
| Driver skew | | 5 | | ns | $t_{SKEW} = t_{DPLH} - t_{DPHL} $; Figures 3 & 5 |
| Driver rise or fall time | | 15 | 40 | ns | From 10% to 90%; $R_{DIFF} = 54\Omega$, $C_{L1} = C_{L2} = 100pF$; Figures 3 & 5 |

Electrical Characteristics (Continued)

$T_{AMB} = T_{MIN}$ to T_{MAX} and $V_{CC} = 5V \pm 5\%$ unless otherwise noted.

| PARAMETERS | MIN. | TYP. | MAX. | UNITS | CONDITIONS |
|---|------|------|-----------|-------------|---|
| SP490 Receiver DC Characteristics | | | | | |
| Differential input threshold | -0.2 | | 0.2 | V | $-7V \leq V_{CM} \leq 12V$ |
| Input hysteresis | | 70 | | mV | $V_{CM} = 0V$ |
| Output voltage HIGH | 3.5 | | | V | $V_{ID} = 200mV, I_O = -4mA$ |
| Output voltage LOW | | | 0.4 | V | $V_{ID} = -200mV, I_O = 4mA$ |
| Input resistance | 12 | 15 | | k Ω | $-7V \leq V_{CM} \leq 12V$ |
| Input current (A, B); $V_{IN} = 12V$ | | | ± 1.0 | mA | $V_{IN} = 12V$ |
| Input current (A, B); $V_{IN} = -7V$ | | | -0.8 | mA | $V_{IN} = -7V$ |
| Short circuit current | | | 85 | mA | $0V \leq V_O \leq V_{CC}$ |
| SP490 Receiver AC Characteristics | | | | | |
| Maximum data rate | 5 | | | Mbps | |
| Receiver input to output, t_{PLH} | | 45 | 150 | ns | $R_{DIFF} = 54\Omega, C_{L1} = C_{L2} = 100pF$; Figures 3 and 7 |
| Receiver input to output, t_{PHL} | | 45 | 150 | ns | $R_{DIFF} = 54\Omega, C_{L1} = C_{L2} = 100pF$; Figures 3 and 7 |
| Differential receiver skew, $ t_{PLH} - t_{PHL} $ | | 13 | | ns | $R_{DIFF} = 54\Omega, C_{L1} = C_{L2} = 100pF$; Figures 3 and 7 |
| Power Requirements | | | | | |
| Supply Voltage | 4.75 | | 5.25 | V | |
| Supply Current | | 900 | | μA | |
| SP490 Environmental and Mechanical | | | | | |
| Operating Temperature | | | | | |
| Commercial (_C_) | 0 | | 70 | $^{\circ}C$ | |
| Storage Temperature | -65 | | 150 | $^{\circ}C$ | |
| Package | | | | | |
| NSOIC (_N) | | | | | |

Test Circuits




Figure 1: Driver DC Test Load Circuit

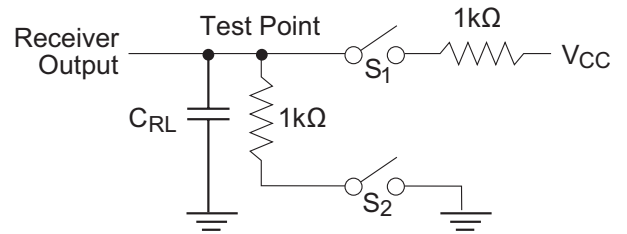


Figure 2: Receiver Timing Test Load Circuit

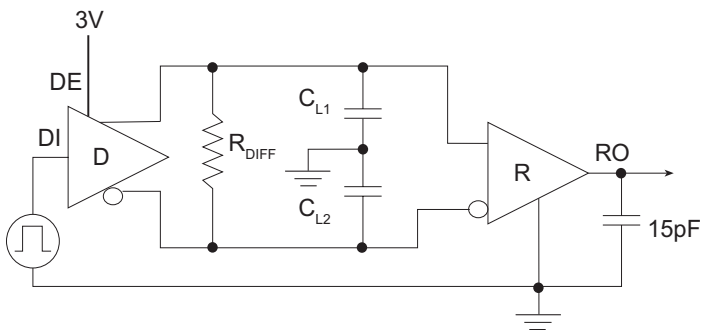


Figure 3: Driver/Receiver Timing Test Circuit

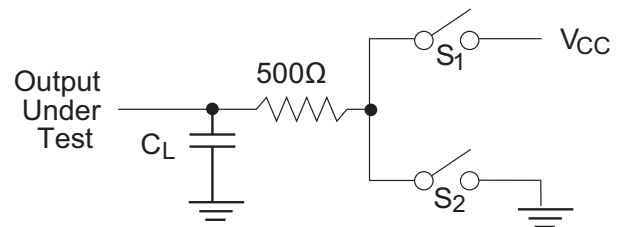


Figure 4: Driver Timing Test Load #2 Circuit

Switching Waveforms

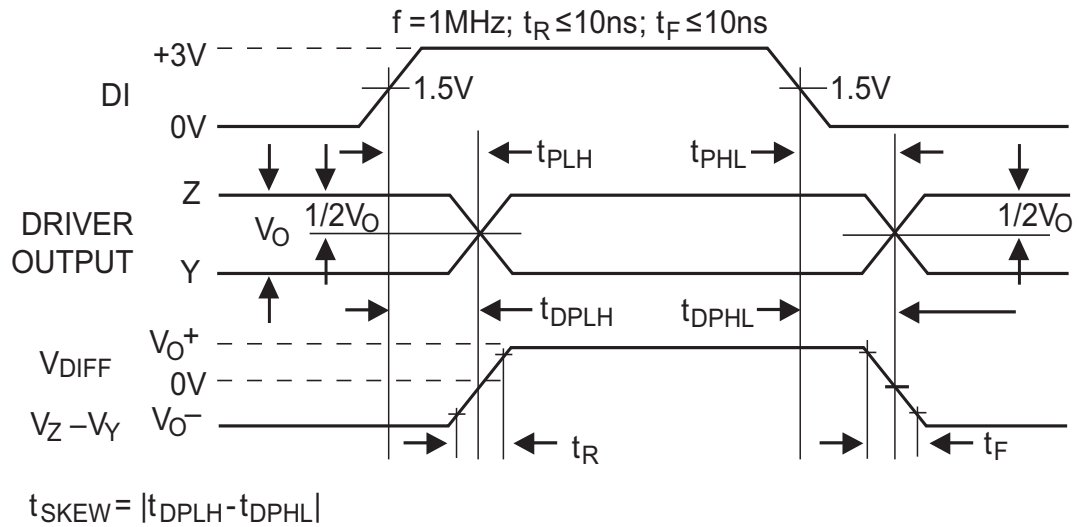


Figure 5: Driver Propagation Delays

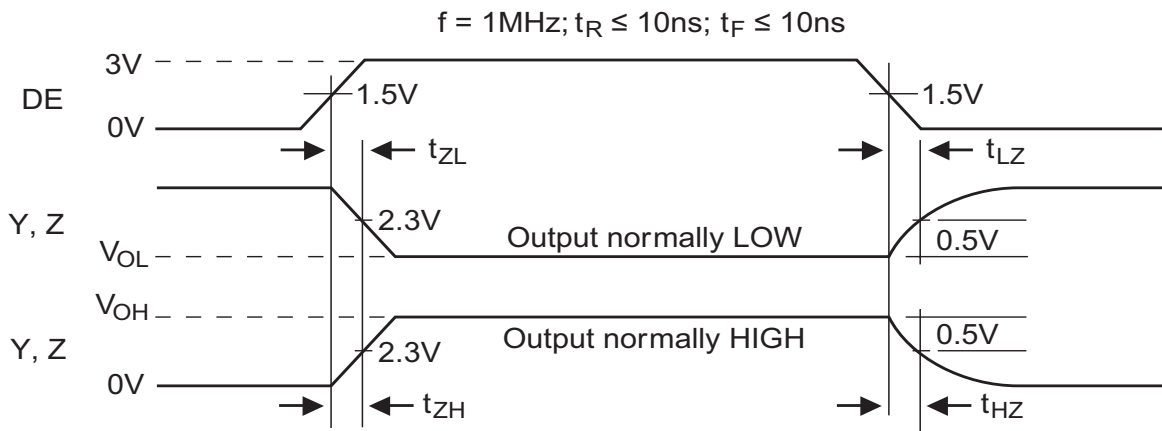


Figure 6: Driver Enable and Disable Times

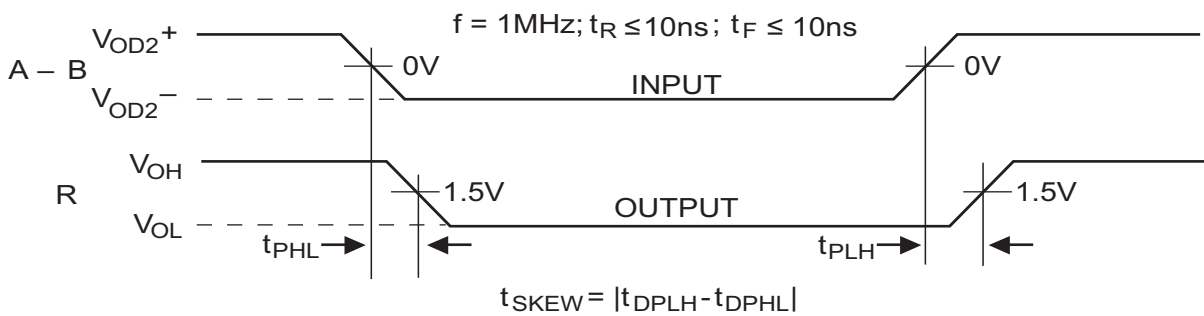


Figure 7: Receiver Propagation Delays

Absolute Maximum Ratings (SP491)

These are stress ratings only and functional operation of the device at these ratings or any other above those indicated in the operation sections of the specifications below is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

V_{CC}.....7.0V

Input Voltages

Logic.....-0.5V to (V_{CC}+0.5V)

Drivers.....-0.5V to (V_{CC}+0.5V)

Receivers.....±14V

Output Voltages

Logic.....-0.5V to (V_{CC}+0.5V)

Drivers.....±14V

Receivers.....-0.5V to (V_{CC}+0.5V)

Storage Temperature.....-65°C to +150°C

Power Dissipation.....1000mW

Electrical Characteristics

T_{AMB} = T_{MIN} to T_{MAX} and V_{CC} = 5V ±5% unless otherwise noted

| PARAMETERS | MIN. | TYP. | MAX. | UNITS | CONDITIONS |
|--|------|------|-----------------|-------|---|
| SP491 Driver DC Characteristics | | | | | |
| Differential output voltage | | | V _{CC} | V | Unloaded; R = ∞Ω ; Figure 1 |
| Differential output voltage | 2 | | V _{CC} | V | With load; R = 50Ω (RS-422); Figure 1 |
| Differential output voltage | 1.5 | | V _{CC} | V | With load; R = 27Ω (RS-485); Figure 1 |
| Change in magnitude of driver differential output voltage for complimentary states | | | 0.2 | V | R = 27Ω or R = 50Ω; Figure 1 |
| Driver common-mode output voltage | | | 3 | V | R = 27Ω or R = 50Ω; Figure 1 |
| Input high voltage | 2.0 | | | V | Applies to DE, D, $\overline{\text{REB}}$ |
| Input low voltage | | | 0.8 | V | Applies to DE, D, $\overline{\text{REB}}$ |
| Input current | | | ±10 | μA | Applies to DE, D, $\overline{\text{REB}}$ |
| Driver short circuit current V _{OUT} = HIGH | | | ±250 | mA | -7V ≤ V _O ≤ 12V |
| Driver short circuit current V _{OUT} = LOW | | | ±250 | mA | -7V ≤ V _O ≤ 12V |

Electrical Characteristics, Continued

$T_{AMB} = T_{MIN}$ to T_{MAX} and $V_{CC} = 5V \pm 5\%$ unless otherwise noted

| PARAMETERS | MIN. | TYP. | MAX. | UNITS | CONDITIONS |
|--|------|------|-----------|------------|---|
| SP491 Driver AC Characteristics | | | | | |
| Maximum data rate | 5 | | | Mbps | $\overline{REB} = 5V, DE = 5V$ |
| Driver input to output, t_{PLH} | | 30 | 60 | ns | $R_{DIFF} = 54\Omega, C_{L1} = C_{L2} = 100pF$; Figures 3 & 5 |
| Driver input to output, t_{PHL} | | 30 | 60 | ns | $R_{DIFF} = 54\Omega, C_{L1} = C_{L2} = 100pF$; Figures 3 & 5 |
| Driver skew | | 5 | 10 | ns | $t_{SKEW} = t_{DPLH} - t_{DPHL} $; Figures 3 & 5 |
| Driver rise or fall time | | 15 | 40 | ns | From 10%-90%; $R_{DIFF} = 54\Omega, C_{L1} = C_{L2} = 100pF$; Figures 3 & 5 |
| Driver enable to output HIGH | | 40 | 70 | ns | $C_{L1} = C_{L2} = 100pF$; Figures 4 & 6, S_2 closed |
| Driver enable to output LOW | | 40 | 70 | ns | $C_{L1} = C_{L2} = 100pF$; Figures 4 & 6, S_1 closed |
| Driver disable time from LOW | | 40 | 70 | ns | $C_{L1} = C_{L2} = 100pF$; Figures 4 & 6, S_1 closed |
| Driver disable time from HIGH | | 40 | 70 | ns | $C_{L1} = C_{L2} = 100pF$; Figures 4 & 6, S_2 closed |
| SP491 Receiver DC Characteristics | | | | | |
| Differential input threshold | -0.2 | | 0.2 | Volts | $-7V \leq V_{CM} \leq 12V$ |
| Input hysteresis | | 70 | | mV | $V_{CM} = 0V$ |
| Output voltage HIGH | 3.5 | | | Volts | $V_{ID} = 200mV, I_O = -4mA$ |
| Output voltage LOW | | | 0.4 | Volts | $V_{ID} = -200mV, I_O = 4mA$ |
| Three-State (High Impedance) Output Current | | | ± 1 | μA | $0.4V \leq V_O \leq 2.4V; \overline{REB} = 5V$ |
| Input resistance | 12 | 15 | | k Ω | $-7V \leq V_{CM} \leq 12V$ |
| Input current (A, B); $V_{IN} = 12V$ | | | ± 1.0 | mA | $DE = 0V, V_{CC} = 0V$ or $5.25V, V_{IN} = 12V$ |
| Input current (A, B); $V_{IN} = -7V$ | | | -0.8 | mA | $DE = 0V, V_{CC} = 0V$ or $5.25V, V_{IN} = -7V$ |
| Short circuit current | | | 85 | mA | $0V \leq V_O \leq V_{CC}$ |
| SP491 Receiver AC Characteristics | | | | | |
| Maximum data rate | 5 | | | Mbps | $\overline{REB} = 0V$ |
| Receiver input to output, t_{PLH} | 20 | 45 | 150 | ns | $R_{DIFF} = 54\Omega, C_{L1} = C_{L2} = 100pF$; Figures 3 & 7 |
| Receiver input to output, t_{PHL} | 20 | 45 | 150 | ns | $R_{DIFF} = 54\Omega, C_{L1} = C_{L2} = 100pF$; Figures 3 & 7 |
| Differential receiver skew | | 13 | | ns | $ t_{PLH} - t_{PHL} ; R_{DIFF} = 54\Omega, C_{L1} = C_{L2} = 100pF$; Figures 3 & 7 |
| Receiver enable to output LOW | | 45 | 70 | ns | $C_{RL} = 15pF$; Figures 2 & 8; S_1 closed |
| Receiver enable to output HIGH | | 45 | 70 | ns | $C_{RL} = 15pF$; Figures 2 & 8; S_2 closed |
| Receiver disable time from LOW | | 45 | 70 | ns | $C_{RL} = 15pF$; Figures 2 & 8; S_1 closed |
| Receiver disable time from HIGH | | 45 | 70 | ns | $C_{RL} = 15pF$; Figures 2 & 8; S_2 closed |

Electrical Characteristics, Continued

$T_{AMB} = T_{MIN}$ to T_{MAX} and $V_{CC} = 5V \pm 5\%$ unless otherwise noted

| PARAMETERS | MIN. | TYP. | MAX. | UNITS | CONDITIONS |
|---|------|------|------|-------------|---|
| Power Requirements | | | | | |
| Supply voltage | 4.75 | | 5.25 | V | |
| Supply current | | 900 | | μA | \overline{REB} , D = 0V or V_{CC} ; DE = V_{CC} |
| SP491 Environmental and Mechanical | | | | | |
| Operating Temperature | | | | | |
| Commercial (_C_) | 0 | | 70 | $^{\circ}C$ | |
| Industrial (_E_) | -40 | | 85 | $^{\circ}C$ | |
| Storage Temperature | -65 | | 150 | $^{\circ}C$ | |
| Package | | | | | |
| NSOIC (_N) | | | | | |

Switching Waveforms


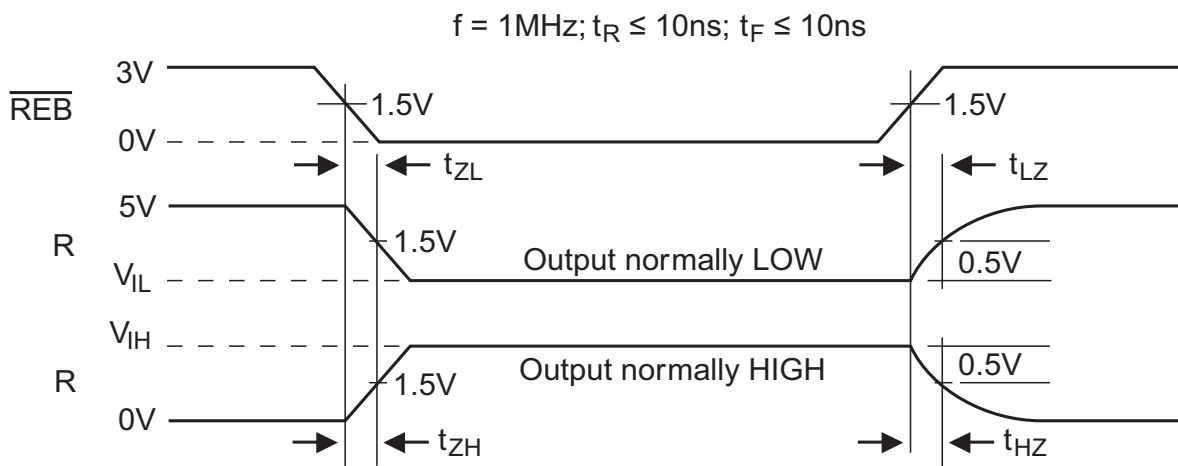



Figure 8: Receiver Enable and Disable Times

Pin Functions

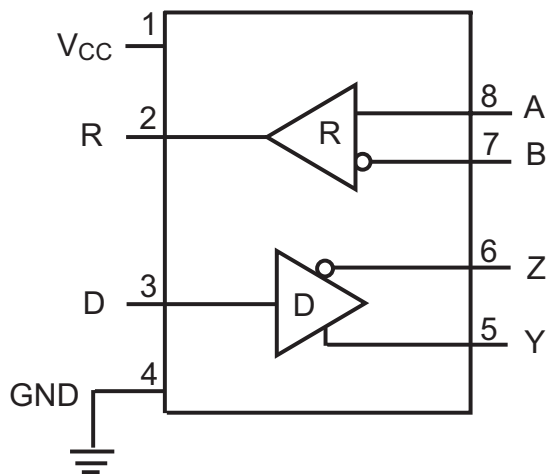

SP490
Pinout (Top View)

| Pin Number | Pin Name | Description |
|------------|----------|------------------------------|
| 1 | VCC | Positive supply |
| 2 | R | Receiver output |
| 3 | D | Driver Input |
| 4 | GND | Ground connection |
| 5 | Y | Non-inverting driver output |
| 6 | Z | Inverting driver output |
| 7 | B | Inverting receiver Input |
| 8 | A | Non-inverting receiver input |

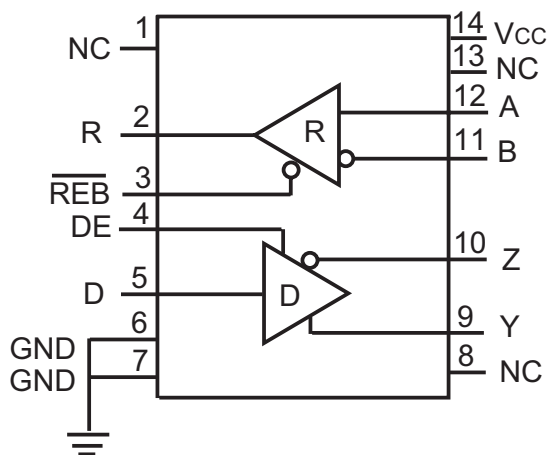

SP491
Pinout (Top View)

| Pin Number | Pin Name | Description |
|------------|-------------------------|-----------------------------------|
| 1 | NC | No connect |
| 2 | R | Receiver output |
| 3 | $\overline{\text{REB}}$ | Receiver output enable active LOW |
| 4 | DE | Driver output enable active HIGH |
| 5 | D | Driver input |
| 6 | GND | Ground connection |
| 7 | GND | Ground connection |
| 8 | NC | No connect |
| 9 | Y | Non-inverting driver output |
| 10 | Z | Inverting driver output |
| 11 | B | Inverting receiver input |
| 12 | A | Non-Inverting receiver input |
| 13 | NC | No connect |
| 14 | VCC | Positive supply |

Description

The SP490 and SP491 are full-duplex differential transceivers that meet the requirements of RS-485 and RS-422. Fabricated with a MaxLinear proprietary BiCMOS process, both products require a fraction of the power of older bipolar designs.

The RS-485 standard is ideal for multi-drop applications or for long-distance interfaces. RS-485 allows up to 32 drivers and 32 receivers to be connected to a data bus, making it an ideal choice for multi-drop applications. Since the cabling can be as long as 4,000 feet, RS-485 transceivers are equipped with a wide (-7V to 12V) common mode range to accommodate ground potential differences. Because RS-485 is a differential interface, data is virtually immune to noise in the transmission line.

Drivers

The drivers for both the SP490 and SP491 have differential outputs. The typical voltage output swing with no load will be 0 volts to +5 volts. With worst case loading of 54 Ω across the differential outputs, the driver can maintain greater than 1.5V voltage levels.

The driver of the SP491 has a driver enable control line which is active high. A logic high on DE (pin 4) of the SP491 will enable the differential driver outputs. A logic low on DE (pin 4) of the SP491 will tri-state the driver outputs. The SP490 does not have a driver enable.

Receivers



The receivers for both the SP490 and SP491 have differential inputs with an input sensitivity as low as $\pm 200\text{mV}$. Input impedance of the receivers is typically 15k Ω (12k Ω minimum). A wide common mode range of -7V to 12V allows for large ground potential differences between systems. The receivers for both the SP490 and SP491 are equipped with the fail-safe feature. Fail-safe guarantees that the receiver output will be in a high state when the input is left unconnected.

The receiver of the SP491 has a receiver enable control line which is active low. A logic low on $\overline{\text{REB}}$ (pin 3) of the SP491 will enable the differential receiver. A logic high on $\overline{\text{REB}}$ (pin 3) of the SP491 will tri-state the receiver.


Mechanical Dimensions

NSOIC8

Top View

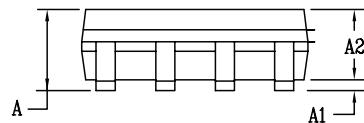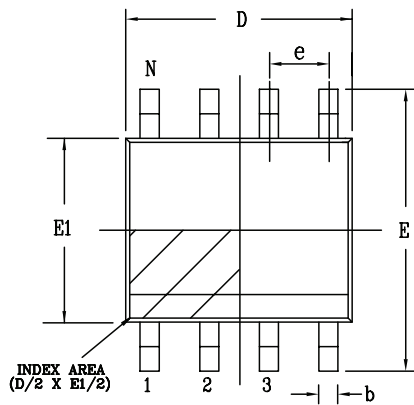

Side View

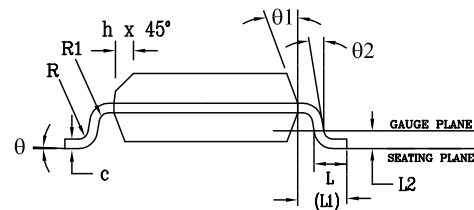

Front View

| PACKAGE OUTLINE NSOIC .150" BODY JEDEC MS-012 VARIATION AA | | | | | | |
|---|---|-----|------|---|-----|-------|
| SYMBOLS | COMMON DIMENSIONS IN MM (Control Unit) | | | COMMON DIMENSIONS IN INCH (Reference Unit) | | |
| | MIN | NOM | MAX | MIN | NOM | MAX |
| A | 1.35 | — | 1.75 | 0.053 | — | 0.069 |
| A1 | 0.10 | — | 0.25 | 0.004 | — | 0.010 |
| A2 | 1.25 | — | 1.65 | 0.049 | — | 0.065 |
| b | 0.31 | — | 0.51 | 0.012 | — | 0.020 |
| c | 0.17 | — | 0.25 | 0.007 | — | 0.010 |
| E | 6.00 BSC | | | 0.236 BSC | | |
| E1 | 3.90 BSC | | | 0.154 BSC | | |
| e | 1.27 BSC | | | 0.050 BSC | | |
| h | 0.25 | — | 0.50 | 0.010 | — | 0.020 |
| L | 0.40 | — | 1.27 | 0.016 | — | 0.050 |
| L1 | 1.04 REF | | | 0.041 REF | | |
| L2 | 0.25 BSC | | | 0.010 BSC | | |
| R | 0.07 | — | — | 0.003 | — | — |
| R1 | 0.07 | — | — | 0.003 | — | — |
| q | 0° | — | 8° | 0° | — | 8° |
| q1 | 5° | — | 15° | 5° | — | 15° |
| q2 | 0° | — | — | 0° | — | — |
| D | 4.90 BSC | | | 0.193 BSC | | |
| N | 8 | | | 8 | | |



Drawing No: POD-00000108

Revision: A


Mechanical Dimensions

NSOIC14

Top View

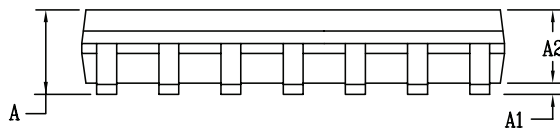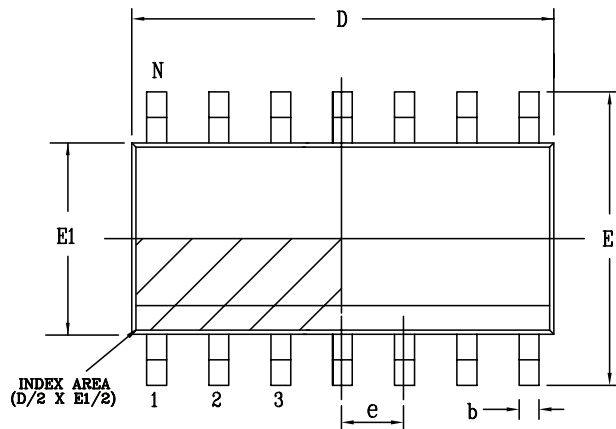

Side View

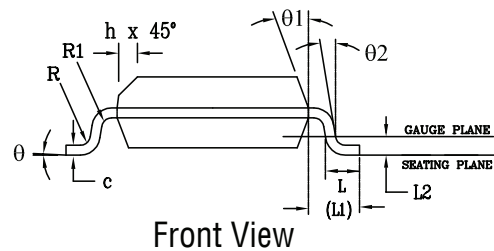

Front View

| PACKAGE OUTLINE NSOIC .150" BODY JEDEC MS-012 VARIATION AB | | | | | | |
|---|---|-----|------|---|-----|-------|
| SYMBOLS | COMMON DIMENSIONS IN MM (Control Unit) | | | COMMON DIMENSIONS IN INCH (Reference Unit) | | |
| | MIN | NOM | MAX | MIN | NOM | MAX |
| A | 1.35 | — | 1.75 | 0.053 | — | 0.069 |
| A1 | 0.10 | — | 0.25 | 0.004 | — | 0.010 |
| A2 | 1.25 | — | 1.65 | 0.049 | — | 0.065 |
| b | 0.31 | — | 0.51 | 0.012 | — | 0.020 |
| c | 0.17 | — | 0.25 | 0.007 | — | 0.010 |
| E | 6.00 BSC | | | 0.236 BSC | | |
| E1 | 3.90 BSC | | | 0.154 BSC | | |
| e | 1.27 BSC | | | 0.050 BSC | | |
| h | 0.25 | — | 0.50 | 0.010 | — | 0.020 |
| L | 0.40 | — | 1.27 | 0.016 | — | 0.050 |
| L1 | 1.04 REF | | | 0.041 REF | | |
| L2 | 0.25 BSC | | | 0.010 BSC | | |
| R | 0.07 | — | — | 0.003 | — | — |
| R1 | 0.07 | — | — | 0.003 | — | — |
| q | 0° | — | 8° | 0° | — | 8° |
| q1 | 5° | — | 15° | 5° | — | 15° |
| q2 | 0° | — | — | 0° | — | — |
| D | 8.65 BSC | | | 0.341 BSC | | |
| N | 14 | | | | | |

Drawing No: POD-00000109

Revision: A

Ordering Information⁽¹⁾

| Part Number | Operating Temperature Range | Lead-Free | Package | Packaging Method |
|--------------|-----------------------------|--------------------|--------------|------------------|
| SP490CN-L/TR | 0°C to 70°C | Yes ⁽²⁾ | 8-pin NSOIC | Reel |
| SP491CN-L/TR | | | 14-pin NSOIC | Reel |
| SP491EN-L/TR | -40°C to 85°C | | | Reel |

NOTE:

1. Refer to www.exar.com/SP490 and www.exar.com/SP491 for most up-to-date Ordering Information.
2. Visit www.exar.com for additional information on Environmental Rating.

Revision History

| Revision | Date | Description |
|----------|-----------|--|
| - | 02/24/05 | Sipex Legacy Data Sheet |
| 1.0.0 | 07/14/08 | Convert to Exar format. |
| 1.0.1 | June 2011 | Remove minimum entry to Driver Short Circuit Current. Change SP490 receiver propagation typical to 45ns. Remove SP491 receiver short circuit current minimum entry. Change SP491 receiver propagation delay MIN and TYP levels to 20 and 45ns respectively. Change SP491 receiver Enable and Disable time TYP and MAX levels to 45 and 70ns respectively. Change SP491 Supply Current TYP to 900µA. Remove SP491 driver rise/fall time minimum. Update ordering information. |
| 1.0.2 | 02/06/18 | Updated format and included MaxLinear logo. Remove GND from Differential Output Voltage min (page 2 & 6). Update ordering information table format. Corrected Figure numbers (after Figure 4). Added Pin Function section. Corrected SP491 pin 3 name. Removed obsolete PDIP reference in description and mechanical section, and industrial for SP490. |



Corporate Headquarters:
 5966 La Place Court
 Suite 100
 Carlsbad, CA 92008
 Tel.: +1 (760) 692-0711
 Fax: +1 (760) 444-8598
www.maxlinear.com

High Performance Analog:
 1060 Rincon Circle
 San Jose, CA 95131
 Tel.: +1 (669) 265-6100
 Fax: +1 (669) 265-6101
 Email: serialtechsupport@exar.com
www.exar.com

The content of this document is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment by MaxLinear, Inc.. MaxLinear, Inc. assumes no responsibility or liability for any errors or inaccuracies that may appear in the informational content contained in this guide. Complying with all applicable copyright laws is the responsibility of the user. Without limiting the rights under copyright, no part of this document may be reproduced into, stored in, or introduced into a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), or for any purpose, without the express written permission of MaxLinear, Inc.

MaxLinear, Inc. does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless MaxLinear, Inc. receives, in writing, assurances to its satisfaction that: (a) the risk of injury or damage has been minimized; (b) the user assumes all such risks; (c) potential liability of MaxLinear, Inc. is adequately protected under the circumstances.

MaxLinear, Inc. may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from MaxLinear, Inc., the furnishing of this document does not give you any license to these patents, trademarks, copyrights, or other intellectual property.

Company and product names may be registered trademarks or trademarks of the respective owners with which they are associated.

© 2008 - 2017 MaxLinear, Inc. All rights reserved

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View C5750X7S2A106M230KB](#) on WIN SOURCE

 [TDK Corporation](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management