



**THE DATASHEET OF
MAX9614AXT+T**





Low-Power Single/Dual, Rail-to-Rail Op Amps

MAX9614/MAX9616

General Description

The MAX9614/MAX9616 are low-power precision op amps that feature precision MOS inputs.

These devices are ideal for a large number of signal processing applications such as photodiode transimpedance amplifiers and filtering/amplification of a wide variety of signals in industrial equipment. The devices also feature excellent RF immunity, making them ideal for portable applications.

The MAX9614/MAX9616 are capable of operating from a 2.5V to 5.5V supply voltage over the -40°C to +125°C automotive temperature range.

Both singles and duals are available in tiny SC70 packages. The MAX9614 features an active-low shutdown pin.

Applications

- Notebooks, Portable Media Players
- Industrial and Medical Sensors
- General Purpose Signal Processing

Features


- ◆ $V_{CC} = 2.5V$ to $5.5V$ ($-40^{\circ}C$ to $+125^{\circ}C$)
- ◆ Low $100\mu V$ (max) V_{OS}
- ◆ $1\mu A$ Supply Current in Shutdown, $175\mu A$ Operating
- ◆ Small SC70 Package
- ◆ 2.8MHz Bandwidth
- ◆ Excellent RF Immunity

Ordering Information

| PART | TEMP RANGE | PIN-PACKAGE | TOP MARK |
|--------------|-----------------|-------------|----------|
| MAX9614AXT+T | -40°C to +125°C | 6 SC70 | +ADL |
| MAX9616AXA+T | -40°C to +125°C | 8 SC70 | +AAE |

+ Denotes lead(Pb)-free/RoHS-compliant package.
T = Tape and reel.

Typical Application Circuit

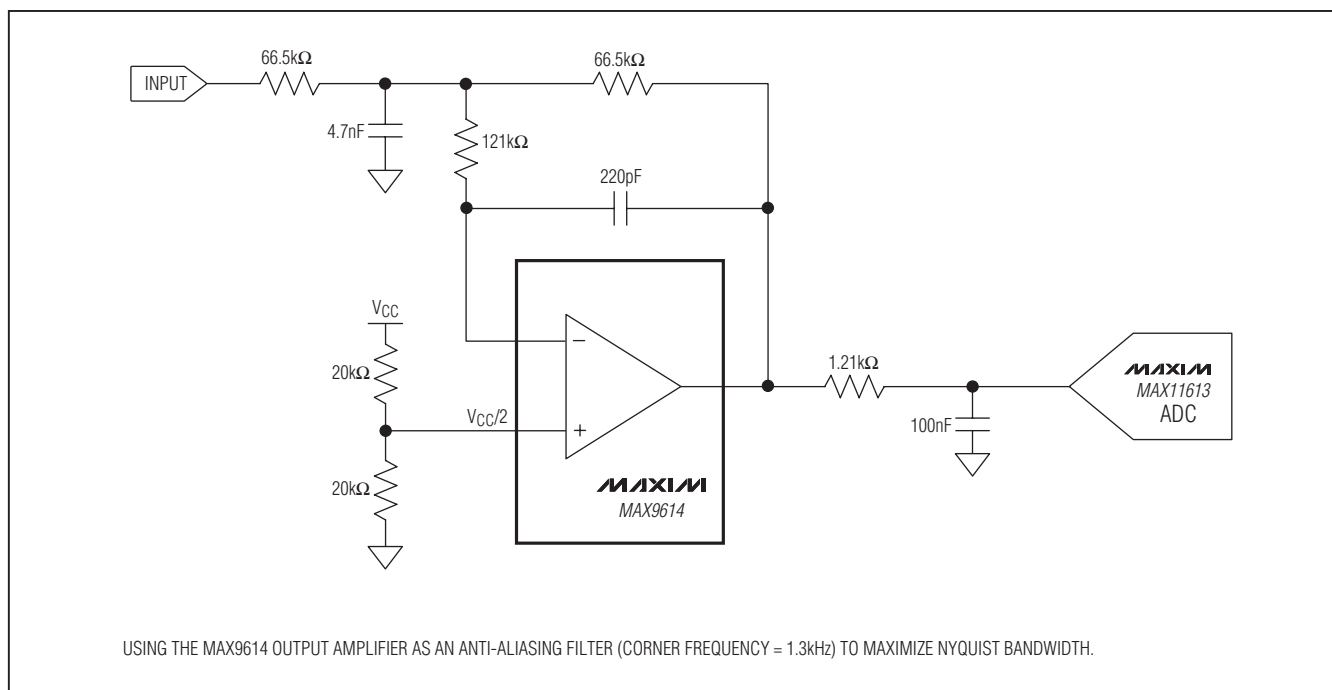

Low-Power Single/Dual, Rail-to-Rail Op Amps

ABSOLUTE MAXIMUM RATINGS

| | | | |
|--|---------------------|---|-----------------|
| IN+, IN-, $\overline{\text{SHDN}}$, VCC to GND..... | -0.3V to +6V | 8-Pin SC70 (derate 3.1mW/°C above +70°C)..... | 245mW |
| OUT to GND | -0.3V to VCC + 0.3V | θ_{JA} | 326°C/W |
| Short-Circuit (GND) Duration, OUT, OUTA, OUTB..... | 5s | θ_{JC} | 115°C/W |
| Continuous Input Current (any pin)..... | ±20mA | Operating Temperature Range..... | -40°C to +125°C |
| Thermal Limits (Note 1) Multilayer PCB | | Junction Temperature | +150°C |
| Continuous Power Dissipation (TA = +70°C) | | Lead Temperature (soldering, 10s)..... | +300°C |
| 6-Pin SC70 (derate 3.1mW/°C above +70°C)..... | 245mW | Soldering Temperature (reflow) | +240°C |
| θ_{JA} | 326.5°C/W | | |
| θ_{JC} | 115°C/W | | |

Note 1: Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a 4-layer board. For detailed information on package thermal considerations, refer to www.maxim-ic.com/thermal-tutorial.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(VCC = $\overline{\text{VSHDN}}$ = 3.3V, VIN+ = VIN- = VCM = GND, RL = 10k Ω to VCC/2, TA = -40°C to +125°C. Typical values are at TA = +25°C, unless otherwise noted.) (Note 2)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---------------------------------------|------------|--|------|-----|-----------|------------------------------|
| DC CHARACTERISTICS | | | | | | |
| Input Voltage Range | VIN+, VIN- | Guaranteed by CMRR test | -0.1 | | VCC - 1.4 | V |
| Input Offset Voltage | VOS | TA = +25°C | | 17 | 100 | μV |
| | | TA = -40°C to +125°C, after power-up autocalibration | | | 165 | |
| | | TA = -40°C to +125°C | | | 750 | |
| Input Offset Voltage Drift | VOS - TC | | | 1 | 7.5 | $\mu\text{V}/^\circ\text{C}$ |
| Input Bias Current (Note 3) | IB | TA = -40°C to +25°C | | 1 | 1.55 | pA |
| | | TA = +70°C | | | 45 | |
| | | TA = +85°C | | | | 135 |
| | | TA = +125°C | | | | 1.55 |
| Input Offset Current (Note 3) | IOS | TA = -40°C to +25°C | | | 0.5 | pA |
| | | TA = +70°C | | | 7 | |
| | | TA = +85°C | | | 25 | |
| | | TA = +125°C | | | 4000 | |
| Common-Mode Rejection Ratio | CMRR | VCM = -0.1V to VCC - 1.4V, TA = +25°C | 80 | 95 | | dB |
| | | VCM = -0.1V to VCC - 1.4V, TA = -40°C to +125°C | 78 | | | |
| Open-Loop Gain | AOL | +0.4V ≤ VOUT ≤ VCC - 0.4V, RL = 10k Ω | 99 | 115 | | dB |
| | | +0.4V ≤ VOUT ≤ VCC - 0.4V, RL = 600 Ω | 93 | 110 | | |
| Output Short-Circuit Current (Note 4) | ISC | To VCC | | 275 | | mA |
| | | To GND | | 75 | | |
| Output Voltage Low | VOL | RL = 10k Ω | | 1 | 11 | mV |
| | | RL = 600 Ω | | 11 | 100 | |
| | | RL = 32 Ω | | 170 | | |

Low-Power Single/Dual, Rail-to-Rail Op Amps

MAX9614/MAX9616

ELECTRICAL CHARACTERISTICS (continued)

($V_{CC} = \overline{VSHDN} = 3.3V$, $V_{IN+} = V_{IN-} = V_{CM} = GND$, $R_L = 10k\Omega$ to $V_{CC}/2$, $T_A = -40^\circ C$ to $+125^\circ C$. Typical values are at $T_A = +25^\circ C$, unless otherwise noted.) (Note 2)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|-------------------------------------|-----------------|---|----------------|----------------|-----|----------------|
| Output Voltage High | VOH | $R_L = 10k\Omega$ | $V_{CC} - 11$ | $V_{CC} - 2$ | | mV |
| | | $R_L = 600\Omega$ | $V_{CC} - 100$ | $V_{CC} - 30$ | | |
| | | $R_L = 32\Omega$ | | $V_{CC} - 560$ | | |
| AC CHARACTERISTICS | | | | | | |
| Input Voltage Noise Density | e_n | $f = 10kHz$ | | 28 | | nV/\sqrt{Hz} |
| Input Voltage Noise | Total noise | $0.1Hz \leq f \leq 10Hz$ | | 5 | | $\mu VP-P$ |
| Input Current Noise Density | I_n | $f = 10kHz$ | | 0.1 | | fA/\sqrt{Hz} |
| Gain Bandwidth | GBW | | | 2.8 | | MHz |
| Slew Rate | SR | | | 1.3 | | $V/\mu s$ |
| Capacitive Loading | C_{LOAD} | No sustained oscillation | | 200 | | pF |
| Total Harmonic Distortion | THD | $f = 10kHz$, $V_{OUT} = 2VP-P$, $A_V = 1V/V$ | | -85 | | dB |
| POWER-SUPPLY CHARACTERISTICS | | | | | | |
| Power-Supply Range | V_{CC} | Guaranteed by PSRR | 2.5 | | 5.5 | V |
| Power-Supply Rejection Ratio | PSRR | $T_A = +25^\circ C$ | 85 | 106 | | dB |
| | | $T_A = -40^\circ C$ to $+125^\circ C$ | 83 | | | |
| Quiescent Current | I_{CC} | $T_A = +25^\circ C$, per amplifier | | 170 | 255 | μA |
| | | $T_A = -40^\circ C$ to $+125^\circ C$, per amplifier | | | 350 | |
| Shutdown Supply Current | I_{SHDN} | MAX9614 only | | | 1 | μA |
| Shutdown Input Low | V_{IL} | MAX9614 only | | | 0.5 | V |
| Shutdown Input High | V_{IH} | MAX9614 only | 1.4 | | | V |
| Output Impedance in Shutdown | R_{OUT_SHDN} | MAX9614 only | | 10 | | $M\Omega$ |
| Turn-On Time from SHDN | t_{ON} | MAX9614 only | | 20 | | μs |
| Power-Up Time | t_{UP} | | | 10 | | ms |

Note 2: All devices are 100% production tested at $T_A = +25^\circ C$. Temperature limits are guaranteed by design.










Note 3: Guaranteed by design, not production tested.

Note 4: Do not exceed package thermal dissipation in the *Absolute Maximum Ratings* section.

Low-Power Single/Dual, Rail-to-Rail Op Amps

Typical Operating Characteristics

($V_{CC} = 3.3V$, $V_{IN+} = V_{IN-} = 0V$, $V_{CM} = V_{CC}/2$, $R_L = 10k\Omega$ to $V_{CC}/2$, values are at $T_A = +25^\circ C$, unless otherwise noted.)

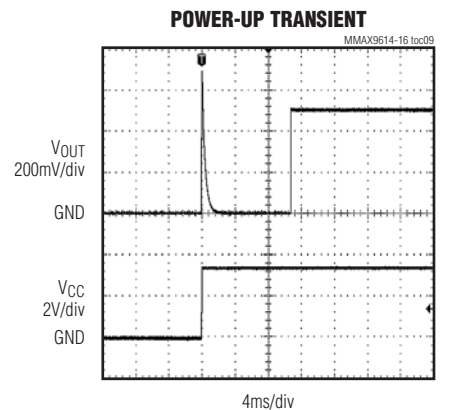
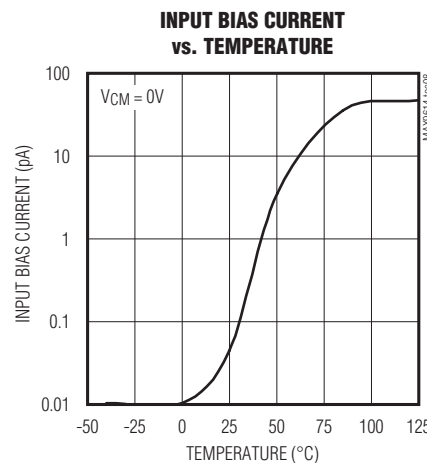
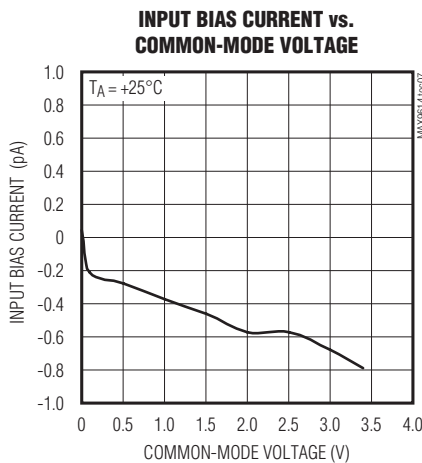
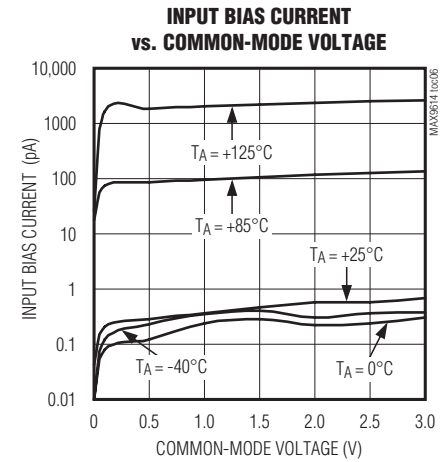
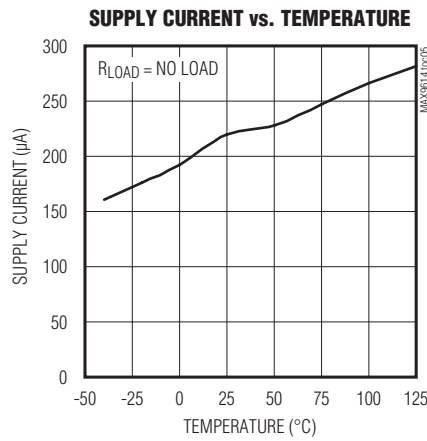
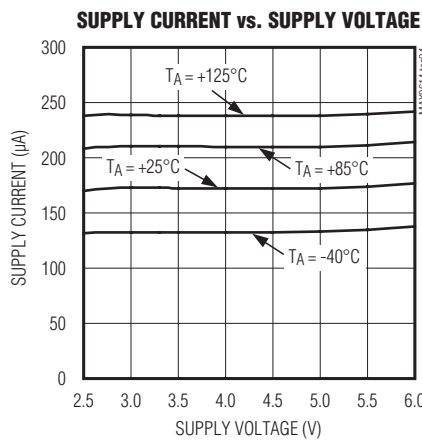
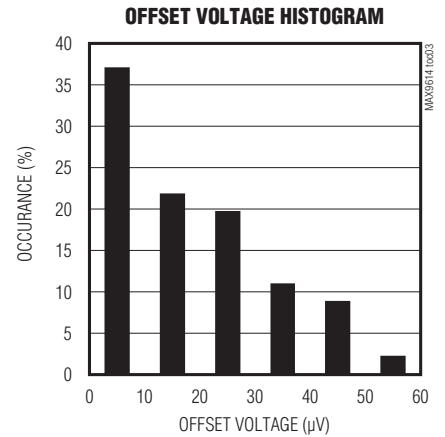
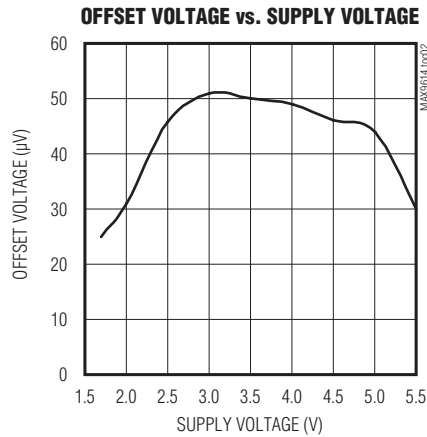
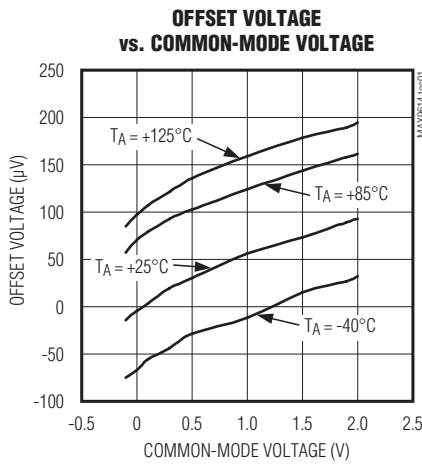


Low-Power Single/Dual, Rail-to-Rail Op Amps

Typical Operating Characteristics (continued)

($V_{CC} = 3.3V$, $V_{IN+} = V_{IN-} = 0V$, $V_{CM} = V_{CC}/2$, $R_L = 10k\Omega$ to $V_{CC}/2$, values are at $T_A = +25^\circ C$, unless otherwise noted.)

MAX9614/MAX9616

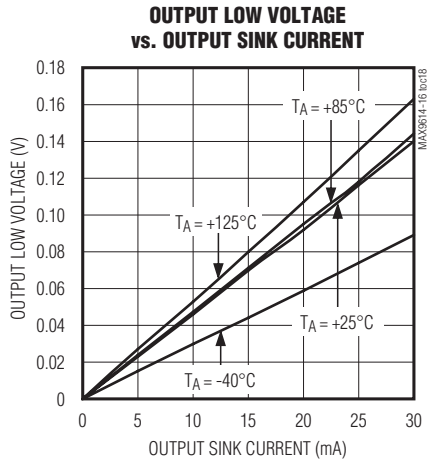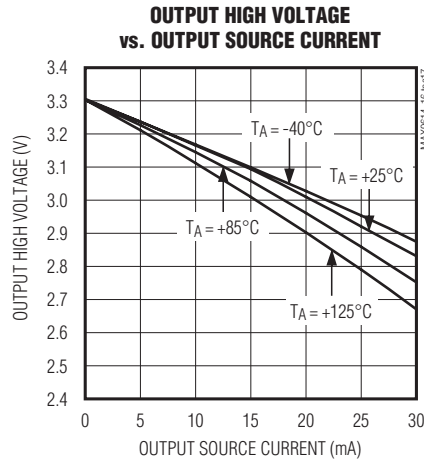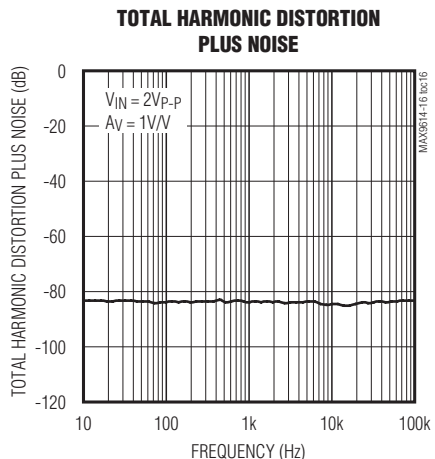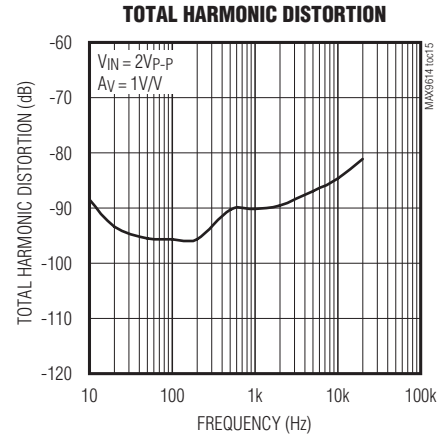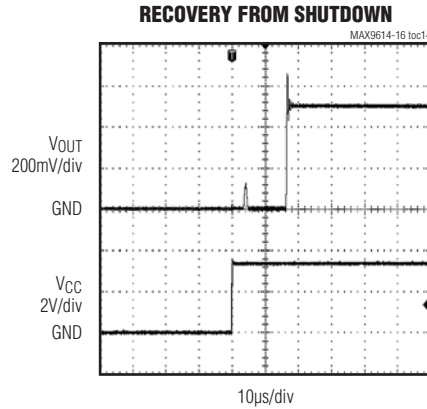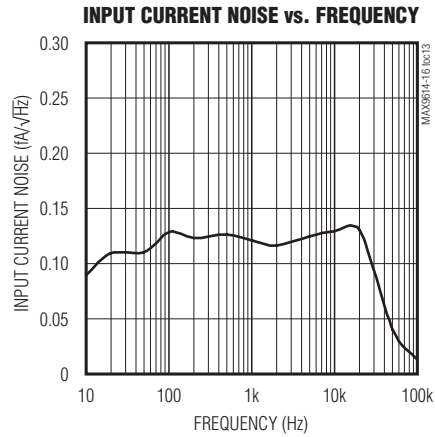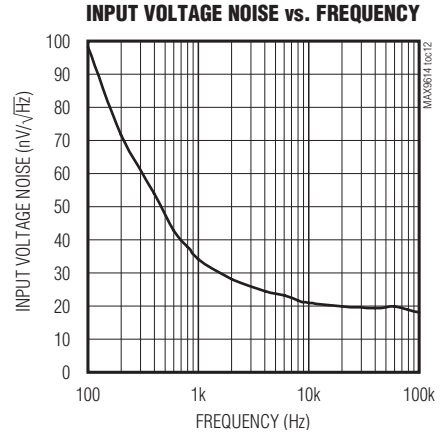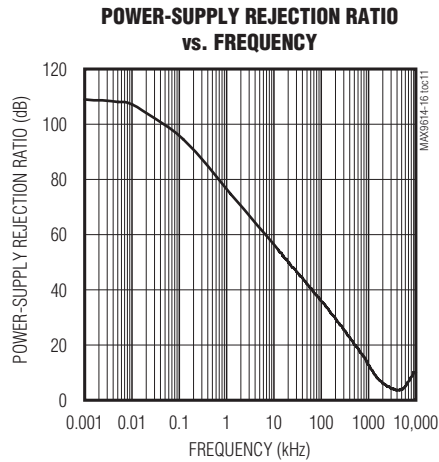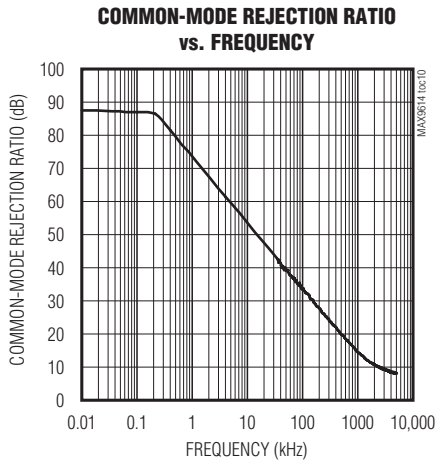


Low-Power Single/Dual, Rail-to-Rail Op Amps


Typical Operating Characteristics (continued)

($V_{CC} = 3.3V$, $V_{IN+} = V_{IN-} = 0V$, $V_{CM} = V_{CC}/2$, $R_L = 10k\Omega$ to $V_{CC}/2$, values are at $T_A = +25^\circ C$, unless otherwise noted.)


0.1Hz TO 10Hz NOISE

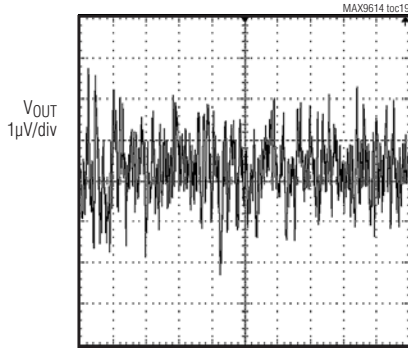


OPEN-LOOP GAIN vs. FREQUENCY

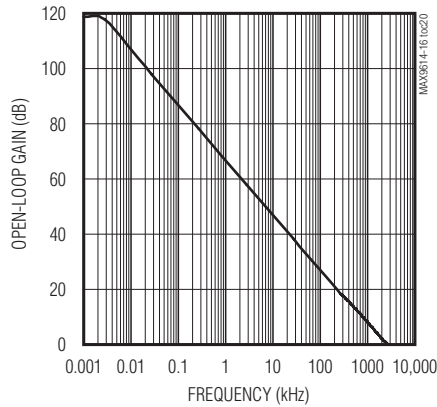


STABILITY vs. CAPACITIVE AND RESISTIVE LOAD IN PARALLEL

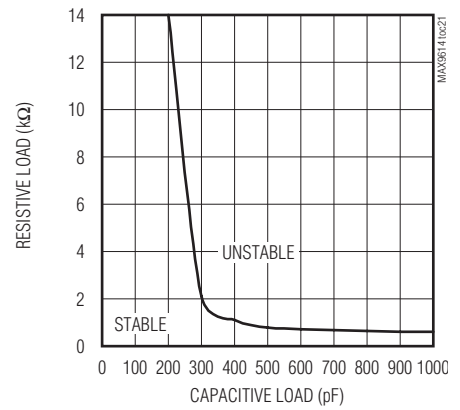


STABILITY vs. CAPACITIVE WITH SERIES ISOLATION RESISTOR

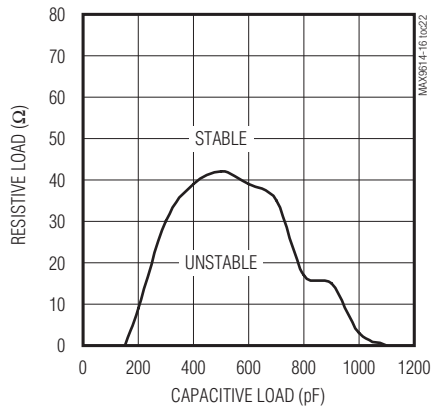


100mV STEP RESPONSE
C_{LOAD} = 200pF

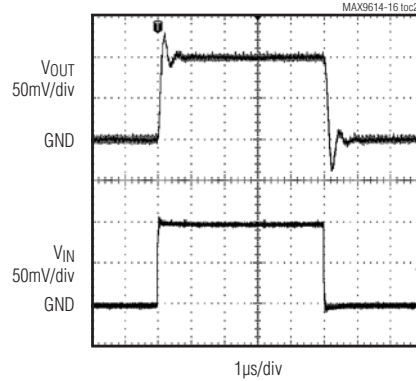

2V STEP RESPONSE
C_{LOAD} = 200pF

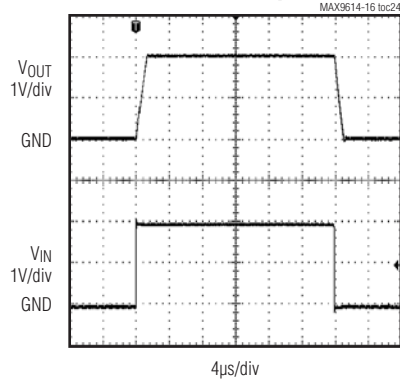

RECOVERY FROM SATURATION
OUTPUT SATURATED TO GND



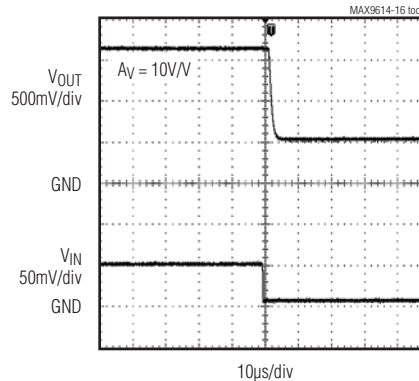


Low-Power Single/Dual, Rail-to-Rail Op Amps


MAX9614/MAX9616

Typical Operating Characteristics (continued)

($V_{CC} = 3.3V$, $V_{IN+} = V_{IN-} = 0V$, $V_{CM} = V_{CC}/2$, $R_L = 10k\Omega$ to $V_{CC}/2$, values are at $T_A = +25^\circ C$, unless otherwise noted.)

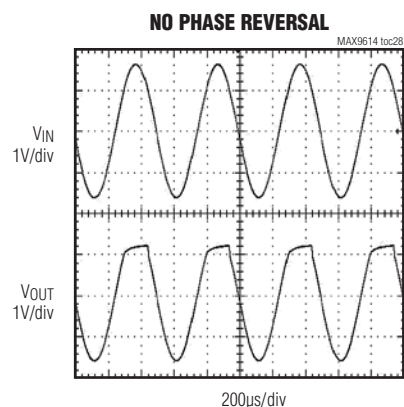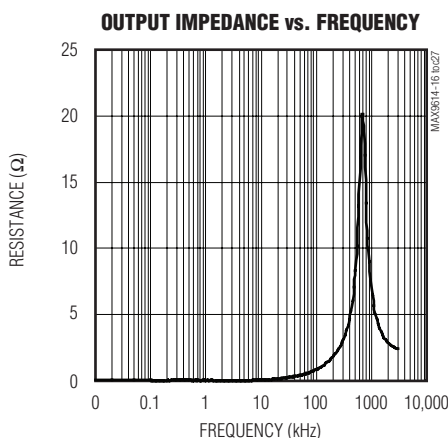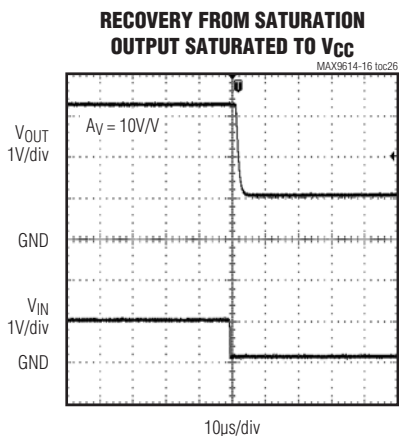

Pin Configuration

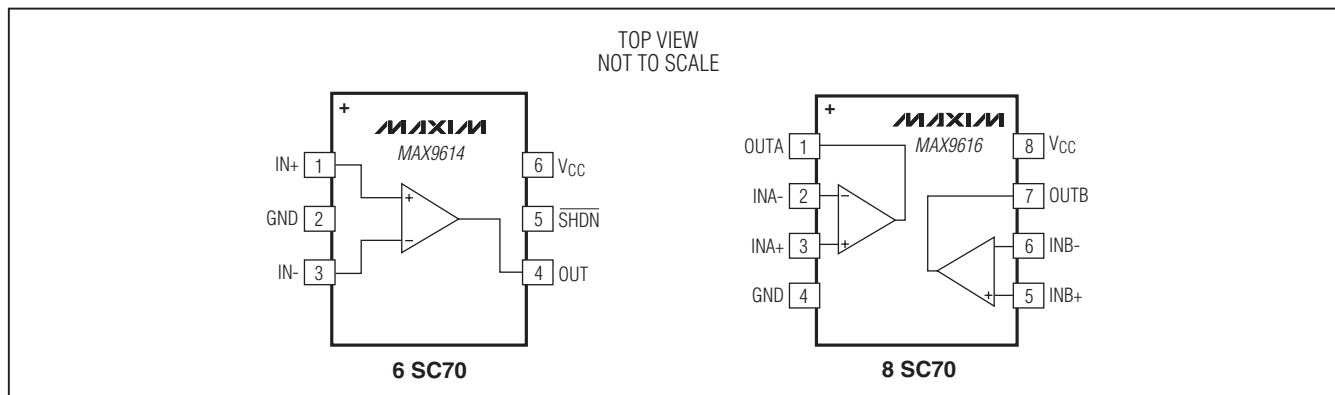

Pin Description

| PIN | | NAME | FUNCTION |
|---------|---------|------|---|
| MAX9614 | MAX9616 | | |
| 1 | — | IN+ | Positive Input |
| — | 3 | INA+ | Positive Input A |
| — | 5 | INB+ | Positive Input B |
| 2 | 4 | GND | Ground |
| 3 | — | IN- | Negative Input |
| — | 2 | INA- | Negative Input A |
| — | 6 | INB- | Negative Input B |
| 4 | — | OUT | Output |
| — | 1 | OUTA | Output A |
| — | 7 | OUTB | Output B |
| 5 | — | SHDN | Active-Low Shutdown |
| 6 | 8 | VCC | Positive Power Supply. Bypass with a 0.1µF capacitor to ground. |

Low-Power Single/Dual, Rail-to-Rail Op Amps

Detailed Description

The MAX9614/MAX9616 are low-power op amps ideal for signal processing applications due to the devices' high precision and CMOS inputs.

The MAX9614 also features a low-power shutdown mode that greatly reduces quiescent current while the device is not operational.

The MAX9614/MAX9616 self-calibrate on power-up to eliminate effects of temperature and power-supply variation.

RF Immunity

The MAX9614/MAX9616 feature robust internal EMI filters that reduce the devices' susceptibility to high-frequency RF signals such as from wireless and mobile devices. This, combined with excellent DC and AC specifications, makes these devices ideal for a wide variety of portable audio and sensitive signal-conditioning applications.

Applications Information

Power-Up Autotrim

The MAX9614/MAX9616 feature an automatic power-up autotrim that self-calibrates the V_{OS} of these devices to less than $100\mu\text{V}$ of input offset voltage. The autotrim sequence takes approximately 10ms to complete, and is triggered by an internal power-on reset (POR) circuitry. During this time, the inputs and outputs are put into high impedance and left unconnected. This self-calibration feature allows the device to eliminate input offset voltage effects due to power supply and operating temperature variation simply by cycling its power.

Take care to ensure that the power supply settles within 0.4ms of power-up after it crosses a POR threshold of 0.5V to ensure that a stable power supply is present when it steps through its autotrim sequence. If the power supply glitches below the 0.5V threshold, the POR circuitry reactivates during next power-up.

Shutdown Operation

The MAX9614 features an active-low shutdown mode that puts both inputs and outputs into a high-impedance state. In this mode, the quiescent current is less than $1\mu\text{A}$. Putting the output in high-impedance allows multiple signal outputs to be multiplexed onto a single output line without the additional external buffers. The device

does not self-calibrate when exiting shutdown mode, and retains its power-up trim settings. The device also instantly recovers from shutdown.

The shutdown logic levels of the device are independent of supply allowing the shutdown to operate by either a 1.8V or 3.3V microcontroller.

Interfacing with the MAX11613

The MAX9616 dual amplifier's low power and tiny size is ideal for driving multichannel analog-to-digital converters (ADCs) such as the MAX11613 (see the *Typical Application Circuit*). The MAX11613 is a low-power, 12-bit I²C ADC that measures either four single-ended or two differential channels in an 8-pin μMAX package. Operating from a single 3V or 3.3V supply, the MAX11613 draws a low $380\mu\text{A}$ supply current when sampling at 10ksps. The MAX11613 family also offers pin-compatible 5V ADCs (MAX11612) and 8-bit (MAX11601) and 10-bit (MAX11607) options.

The MAX9614/MAX9616's output voltage low is designed to be especially close to ground—it is only 11mV above ground, allowing maximum dynamic range in single-supply applications. High output current and capacitance drive capability of the part help it to be useful in ADC driver and line-driver.

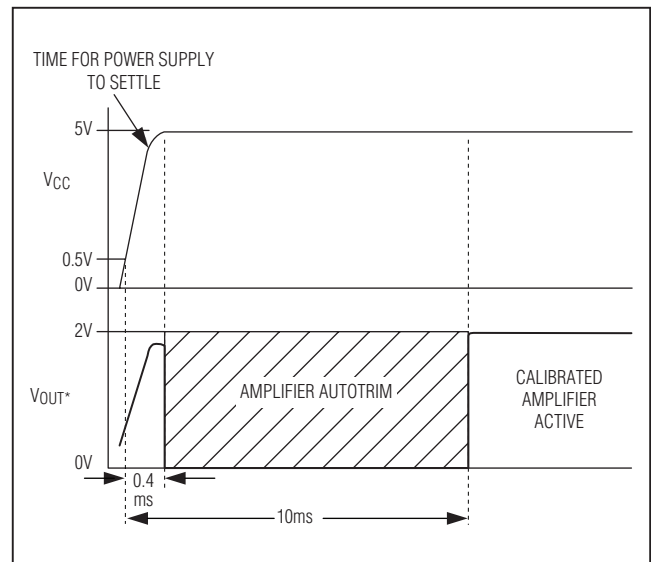


Figure 1. Autotrim Timing Diagram

Low-Power Single/Dual, Rail-to-Rail Op Amps

Input Bias Current

The MAX9614/MAX9616 feature a high-impedance CMOS input stage and a specialized ESD structure that allows low input bias current operation at low input common-mode voltages. Low input bias current is useful when interfacing with high-ohmic sensors. It is also beneficial for designing transimpedance amplifiers for photodiode sensors. This makes the MAX9614/MAX9616 ideal for ground referenced medical and industrial sensor applications.

Active Filters

The MAX9614/MAX9616 are ideal for a wide variety of active filter circuits that make use of their rail-to-rail output stages and high impedance CMOS inputs. The *Typical Application Circuit* shows an example multiple feedback active filter circuit with a corner frequency of 1.3kHz. At low frequencies, the amplifier behaves like a simple low-distortion inverting amplifier of gain = -1, while its high bandwidth gives excellent stopband attenuation above its corner frequency. See the *Typical Application Circuit*.

Chip Information

PROCESS: BiCMOS


MAX9614/MAX9616

Low-Power Single/Dual, Rail-to-Rail Op Amps

Package Information

For the latest package outline information and land patterns, go to www.maxim-ic.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO. | LAND PATTERN NO. |
|--------------|--------------|-------------------------|-------------------------|
| 6 SC70 | X6SN-1 | 21-0077 | 90-0189 |
| 8 SC70 | X8SN-1 | 21-0460 | — |

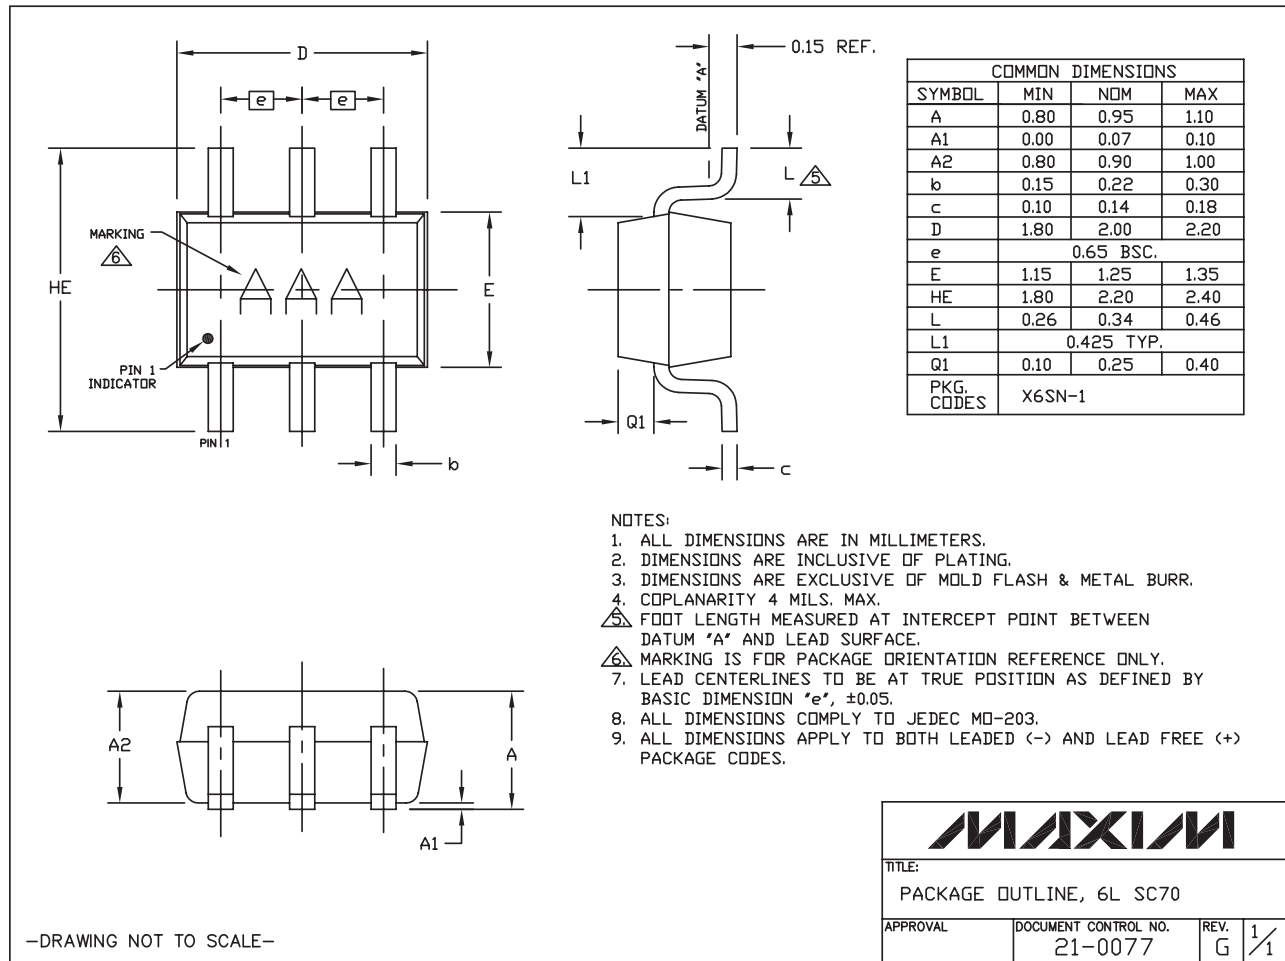


Low-Power Single/Dual, Rail-to-Rail Op Amps

Package Information (continued)

For the latest package outline information and land patterns, go to www.maxim-ic.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

MAX9614/MAX9616

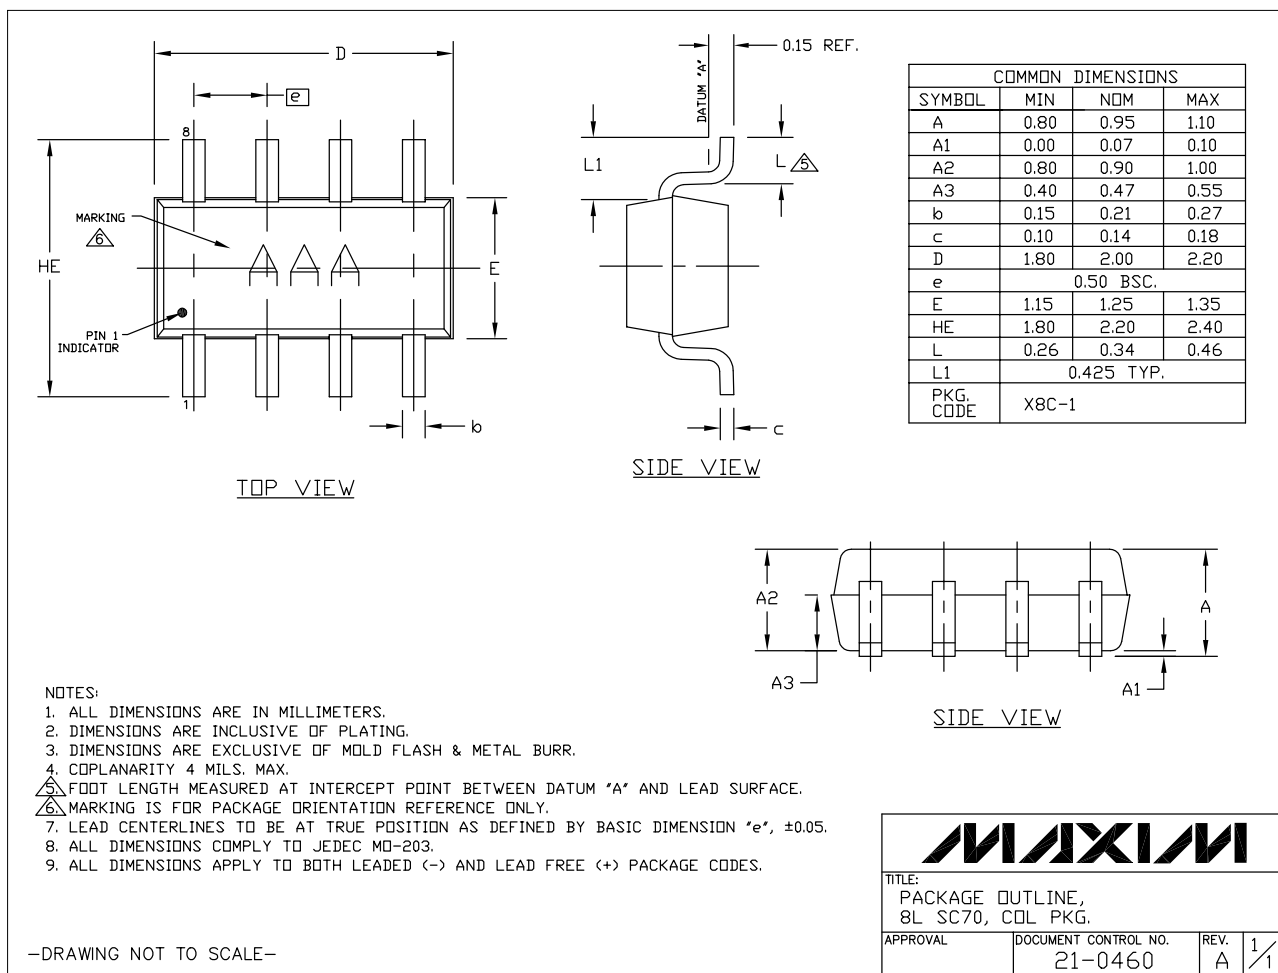

Low-Power Single/Dual, Rail-to-Rail Op Amps

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|------------------------|----------------------|--------------------|----------------------|
| 0 | 8/10 | Initial release | — |

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

12 _____ **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View MAX9614AXT+T on WIN SOURCE](#)
- ⊖ [Maxim Integrated Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management