



# THE DATASHEET OF FAN7300G



# FAN7300

## LCD Back Light Inverter Drive IC

### Features


- High Efficiency Single Stage Power Conversion
- Wide Input Voltage Range 6V to 25V
- Back Light Lamp Ballast and Soft Dimming
- Few External Components
- Precision Voltage Reference Trimmed to 2%
- Soft Start
- PWM and PFM Control
- Analog, Burst and Mixed Dimming Function
- Allows All N-Channel MOSFET Drive
- Double Pulse Suppression Logic
- Open Lamp Detection
- Output Short Circuit Protection
- Open Lamp Regulation
- 20 Pin SSOP

### Description


The FAN7300 provides all the control functions for a series parallel resonant converter and also contains a pulse width modulation (PWM) controller to develop a supply voltage. Typical operating frequency range is between 30kHz and 100kHz depending on the CCFL and the transformer's characteristics.



# Internal Block Diagram

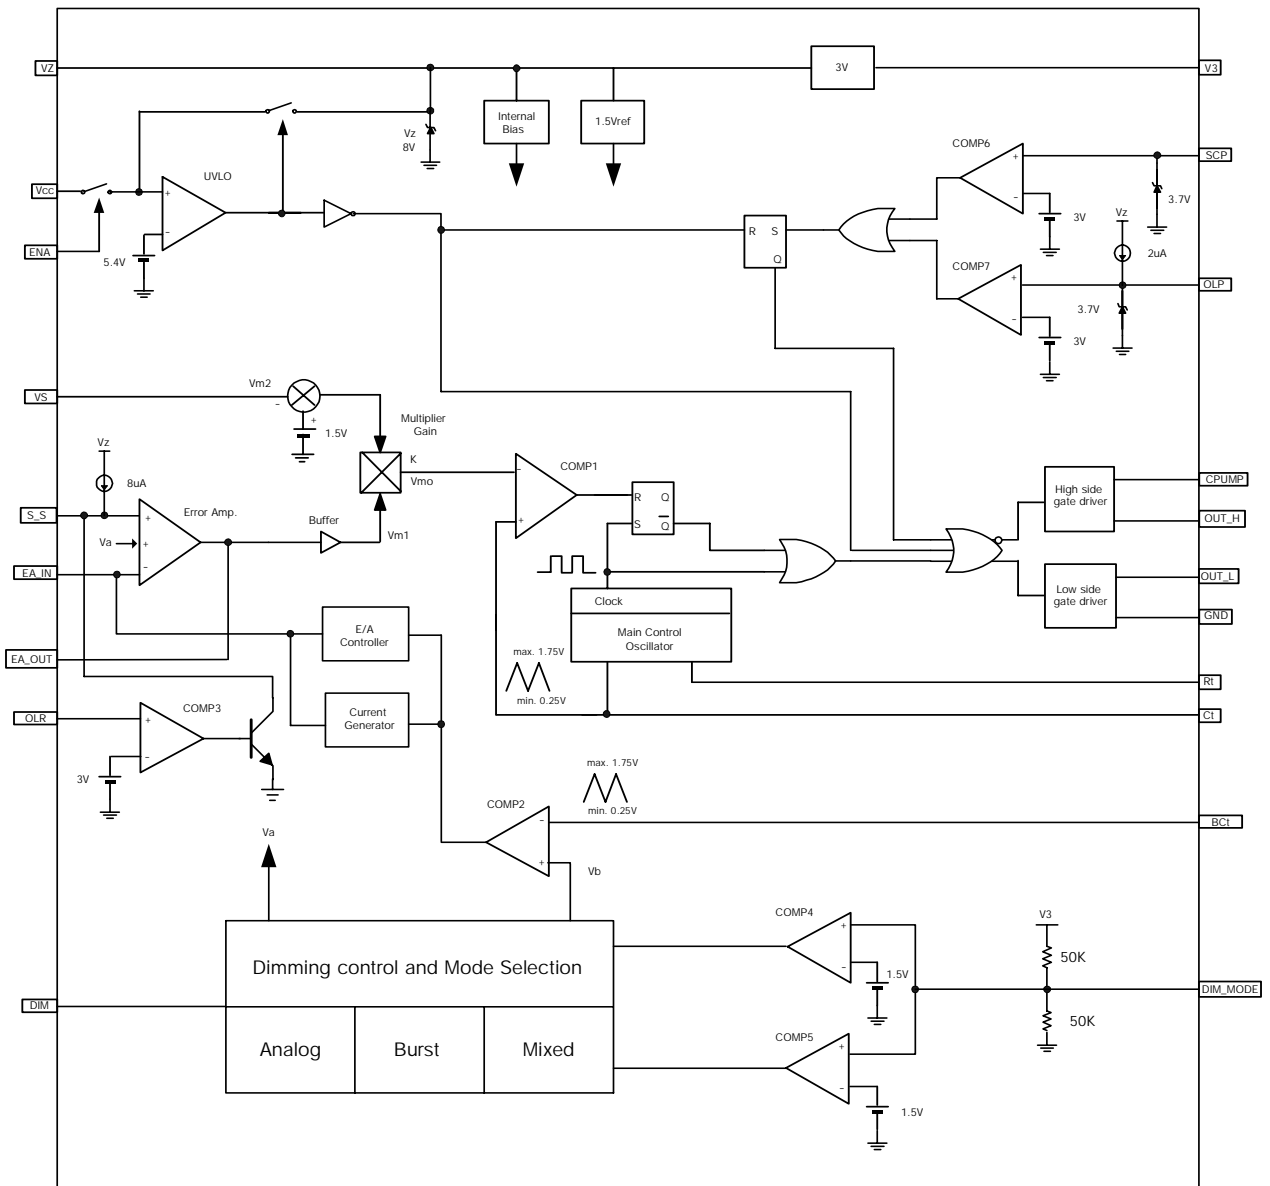

## Pin Assignments

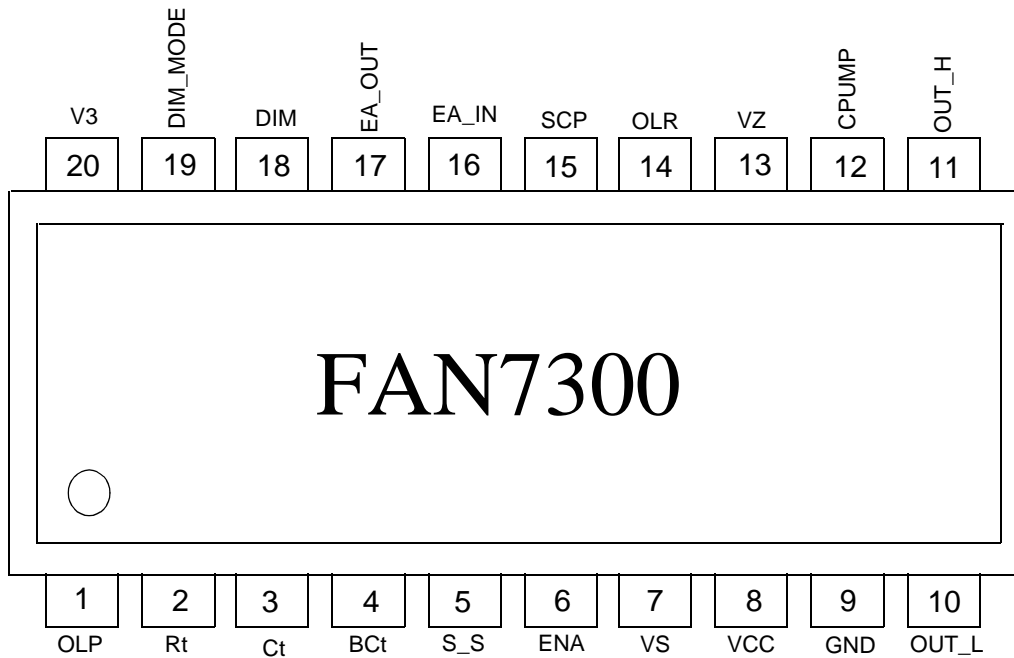

## Pin Definitions

| No | Name  | Function Description           | No | Name     | Function Description        |
|----|-------|--------------------------------|----|----------|-----------------------------|
| 1  | OLP   | Open Lamp Protection           | 11 | OUT_H    | High Side Gate Drive Output |
| 2  | Rt    | Timing Resistor                | 12 | CPUMP    | Charge Pump                 |
| 3  | Ct    | Timing Capacitor               | 13 | VZ       | Zener Voltage               |
| 4  | BCt   | Burst Dimming Timing Capacitor | 14 | OLR      | Open Lamp Regulation        |
| 5  | S_S   | Soft Start                     | 15 | SCP      | Short Circuit Protection    |
| 6  | ENA   | Enable Input                   | 16 | EA_IN    | Error Amplifier Input       |
| 7  | VS    | Voltage Sensing                | 17 | EA_OUT   | Error Amplifier Output      |
| 8  | VCC   | Supply Voltage                 | 18 | DIM      | Dimming Input               |
| 9  | GND   | Ground                         | 19 | DIM_MODE | Dimming Mode Selection      |
| 10 | OUT_L | Low Side Gate Drive Output     | 20 | V3       | 3V Reference Voltage        |

## Absolute Maximum Ratings

V<sub>CC</sub>=10V, for typical values T<sub>a</sub>=25°C, for min/max values T<sub>a</sub> is the operating ambient temperature range with -25°C ≤ T<sub>a</sub> ≤ 85°C and 6V ≤ V<sub>CC</sub> ≤ 25V, unless otherwise specified.

| Characteristics                           | Symbol           | Value     | Unit |
|---|------------------|-----------|------|
| Supply Voltage                            | V <sub>CC</sub>  | 6 ~ 25    | V    |
| Operating Temperature Range               | T <sub>opr</sub> | -25 ~ 85  | °C   |
| Storage Temperature Range                 | T <sub>stg</sub> | -65 ~ 150 | °C   |
| Thermal Resistance Junction-Air (Note1,2) | R <sub>θJA</sub> | 112       | °C/W |
| Power Dissipation                         | P <sub>d</sub>   | 1.1       | W    |

**Note:**

1. Thermal resistance test board  
Size: 76.2mm \* 114.3mm \* 1.6mm(1S0P)  
JEDEC standard: JESD51-3, JESD51-7
2. Assume no ambient airflow

## Electrical Characteristics

V<sub>CC</sub>=10V, for typical values T<sub>a</sub>=25°C, for min/max values T<sub>a</sub> is the operating ambient temperature range with -25°C ≤ T<sub>a</sub> ≤ 85°C and 6V ≤ V<sub>CC</sub> ≤ 25V, unless otherwise specified.

| Characteristics                        | Symbol            | Test Condition                               | Min.                | Typ.                | Max.                | Unit |
|--|-------------------|--|---------------------|---------------------|---------------------|------|
| <b>REFERENCE SECTION</b>               |                   |  |                     |                     |                     |      |
| Reference Voltage                      | V <sub>ref</sub>  | -  | 1.46                | 1.5                 | 1.54                | V    |
| Line Regulation                        | ΔV <sub>ref</sub> | 8 ≤ V <sub>CC</sub> ≤ 20V                    | -                   | 2                   | 25                  | mV   |
| 3V Regulation Voltage                  | V <sub>3</sub>    | -  | 2.86                | 2.96                | 3.06                | V    |
| <b>OSCILLATOR SECTION(MAIN)</b>        |                   |  |                     |                     |                     |      |
| Oscillation Frequency                  | f <sub>osc</sub>  | C <sub>t</sub> = 330pF, R <sub>t</sub> = 14k | 75                  | 95                  | 115                 | kHz  |
| CT High Voltage                        | V <sub>cth</sub>  | -  | -                   | 1.75                | -                   | V    |
| CT Low Voltage                         | V <sub>bct1</sub> | -  | -                   | 0.25                | -                   | V    |
| <b>OSCILLATOR SECTION(BURST)</b>       |                   |  |                     |                     |                     |      |
| Oscillation Frequency                  | f <sub>osc</sub>  | C <sub>tb</sub> = 180nF                      | 125                 | 170                 | 205                 | Hz   |
| BCT High Voltage                       | V <sub>bcth</sub> | -  | -                   | 1.75                | -                   | V    |
| BCT Low Voltage                        | V <sub>bct1</sub> | -  | -                   | 0.25                | -                   | V    |
| <b>ERROR AMP SECTION</b>               |                   |  |                     |                     |                     |      |
| Feedback Output High Voltage           | V <sub>eh</sub>   | EA_IN = 0V                                   | 3.2                 | 3.7                 | 4.2                 | V    |
| Output Sink Current                    | I <sub>sin</sub>  | EA_OUT = 2.2V                                | -                   | -                   | -1                  | mA   |
| Output Source Current                  | I <sub>sur</sub>  | EA_OUT = 2.2V                                | 1                   | -                   | -                   | mA   |
| Feedback High Voltage On Burst Dimming | V <sub>fbh</sub>  | R(EA_IN) = 50kΩ                              | V <sub>a</sub> +0.1 | V <sub>a</sub> +0.4 | V <sub>a</sub> +0.7 | V    |
| <b>MULTIPLIER SECTION</b>              |                   |  |                     |                     |                     |      |
| Multiplier Input Voltage High          | V <sub>mih</sub>  | -  | 1.4                 | 1.6                 | 1.8                 | V    |
| Multiplier Gain                        | K                 | -  | -                   | 0.85                | -                   | 1/V  |
| <b>SOFT START SECTION</b>              |                   |  |                     |                     |                     |      |
| Soft Start Current                     | I <sub>SS</sub>   | S_S=2V                                       | 5                   | 8.3                 | 11.6                | uA   |
| Soft Start Clamping Voltage            | V <sub>ssh</sub>  | -  | 3                   | 3.7                 | 4.4                 | V    |
| <b>PROTECTION SECTION</b>              |                   |  |                     |                     |                     |      |
| Open Lamp Protection Voltage           | V <sub>pr</sub>   | -  | 2.5                 | 3                   | 3.5                 | V    |
| Short Circuit Protection Voltage       | V <sub>sc</sub>   | -  | 2.5                 | 3                   | 3.5                 | V    |
| Open Lamp Regulation                   | V <sub>or</sub>   | -  | 2.5                 | 3                   | 3.5                 | V    |

**Electrical Characteristics** (Continued)

V<sub>CC</sub>=10V, for typical values T<sub>a</sub>=25°C, for min/max values T<sub>a</sub> is the operating ambient temperature range with -25°C ≤ T<sub>a</sub> ≤ 85°C and 6V ≤ V<sub>CC</sub> ≤ 25V, unless otherwise specified.

| Characteristics                       | Symbol           | Test Condition            | Min. | Typ. | Max. | Unit |
|---------------------------------------|------------------|---------------------------|------|------|------|------|
| <b>DIMMING SECTION</b>                |                  |                           |      |      |      |      |
| Analog Dimming Range                  | V <sub>aal</sub> | Dim_Mode > 2V, Dim = 0    | -0.5 | 0    | 0.5  | V    |
|                                       | V <sub>aah</sub> | Dim_Mode > 2V, Dim = 3V   | 2.5  | 3    | 3.5  | V    |
|                                       | V <sub>ba</sub>  | Dim_Mode > 2V             | -    | 3    | -    | V    |
| Burst Dimming Range                   | V <sub>bbl</sub> | Dim_Mode < 1V, Dim = 0    | -0.5 | 0    | 0.5  | V    |
|                                       | V <sub>bh</sub>  | Dim_Mode < 1V, Dim = 3V   | 2.1  | 2.5  | 2.9  | V    |
|                                       | V <sub>ab</sub>  | Dim_Mode < 1V             | 2.45 | 2.85 | 3.25 | V    |
| Mixed Dimming Range                   | V <sub>aml</sub> | Dim_Mode = 1.5V, Dim = 0  | 1.2  | 1.4  | 1.6  | V    |
|                                       | V <sub>amh</sub> | Dim_Mode = 1.5V, Dim = 3V | 2.5  | 3    | 3.5  | V    |
|                                       | V <sub>bml</sub> | Dim_Mode = 1.5V, Dim = 0  | -0.5 | 0    | 0.5  | V    |
|                                       | V <sub>bmh</sub> | Dim_Mode = 1.5V, Dim = 3V | 2.5  | 3    | 3.5  | V    |
| Analog Dimming Select Voltage         | V <sub>sa</sub>  | -                         | 1.5  | 2    | 2.5  | V    |
| Burst Dimming Select Voltage          | V <sub>sb</sub>  | -                         | 0.7  | 1    | 1.3  | V    |
| Mixed Dimming Select Voltage          | V <sub>sm</sub>  | -                         | 1.3  | 1.5  | 1.7  | V    |
| <b>UNDER VOLTAGE LOCK OUT SECTION</b> |                  |                           |      |      |      |      |
| Start Threshold Voltage               | V <sub>th</sub>  | -                         | 4.8  | 5.4  | 6.0  | V    |
| Start Up Current                      | I <sub>st</sub>  | V <sub>CC</sub> = 4.5V    | -    | 150  | 250  | uA   |
| Operating Supply Current              | I <sub>op</sub>  | V <sub>CC</sub> = 10V     | -    | 8.5  | 11   | mA   |
| Stand-by Current                      | I <sub>sb</sub>  | V <sub>CC</sub> = 12V     | -    | 80   | 150  | uA   |
| <b>ON/OFF SECTION</b>                 |                  |                           |      |      |      |      |
| On State Input Voltage                | V <sub>on</sub>  | -                         | 0.7  | -    | -    | V    |
| <b>OUTPUT SECTION</b>                 |                  |                           |      |      |      |      |
| Output High Voltage                   | V <sub>oh</sub>  | V <sub>CC</sub> = 7V      | 5    | -    | -    | V    |
| Output Low Voltage                    | V <sub>ol</sub>  | V <sub>CC</sub> = 7V      | -    | -    | 0.2  | V    |
| Output Voltage With UVLO Activated    | V <sub>uv</sub>  | V <sub>CC</sub> = 4.5V    | -    | -    | 0.9  | V    |
| Output High Clamping Voltage          | V <sub>ohc</sub> | V <sub>CC</sub> = 20V     | 11   | 13.5 | 16   | V    |
| Rising Time                           | T <sub>r</sub>   | V <sub>CC</sub> = 7V      | -    | 100  | 200  | ns   |
| Falling Time                          | T <sub>f</sub>   | V <sub>CC</sub> = 7V      | -    | 50   | 200  | ns   |

## Typical Performance Characteristics

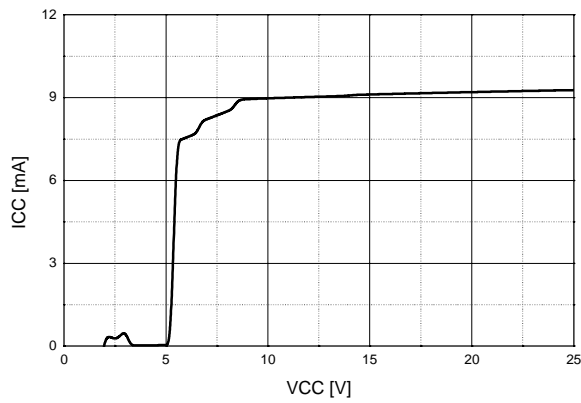


Figure 1. Supply Current vs. Supply Voltage

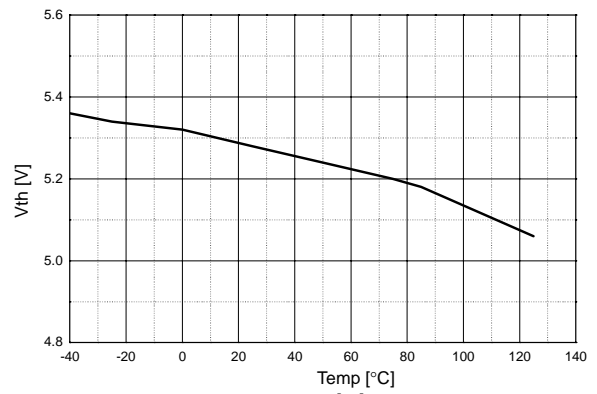


Figure 2. Start up Voltage

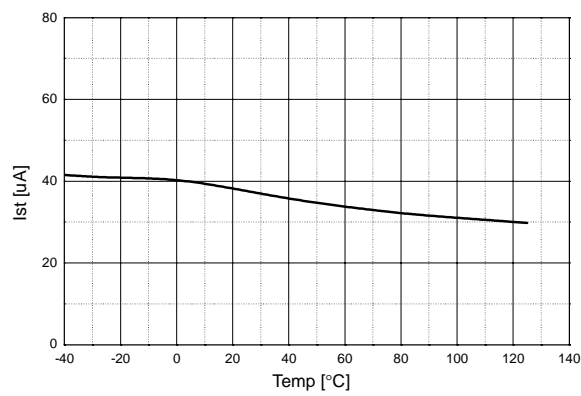


Figure 3. Start up Current

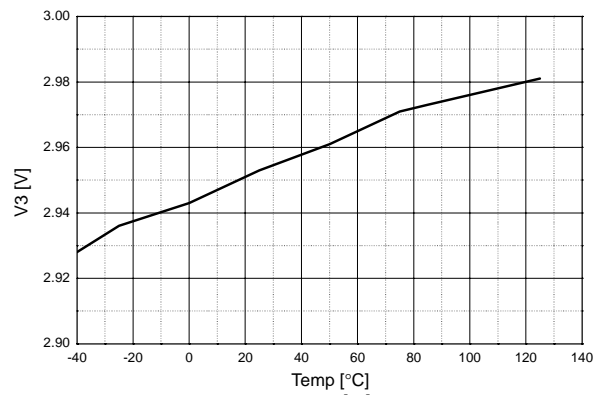


Figure 4. 3V Reference Voltage

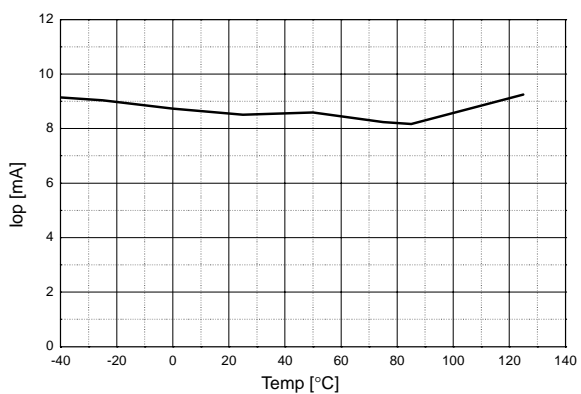


Figure 5. Operating Supply Current

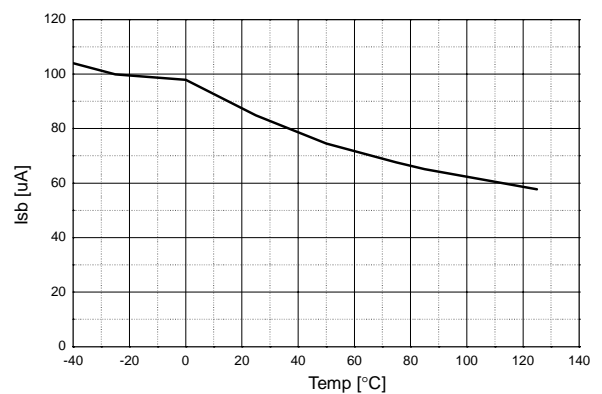


Figure 6. Stand by Current

Typical Performance Characteristics (Continued)

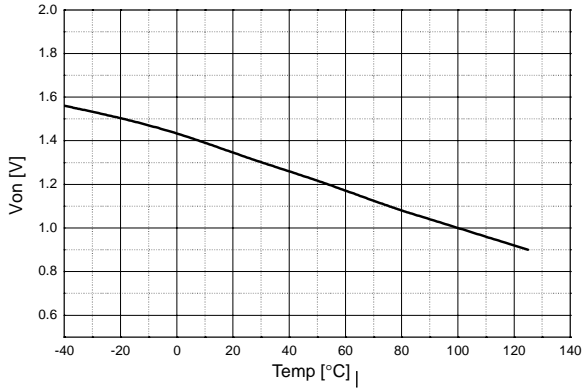


Figure 7. On State Input Voltage

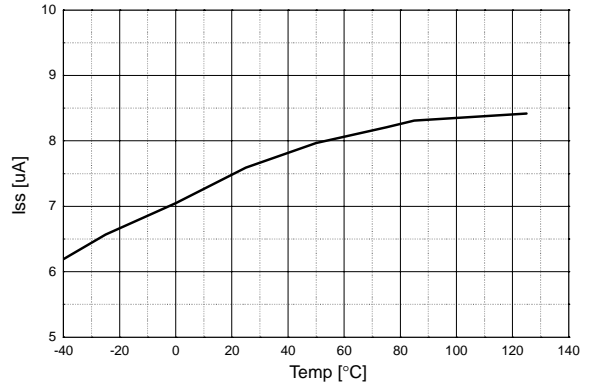


Figure 8. Soft Start Current

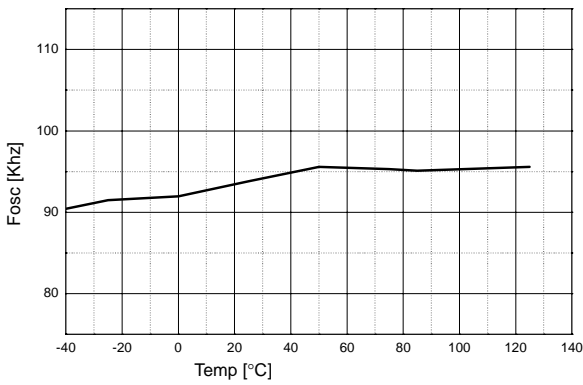


Figure 9. Oscillation Frequency (main)

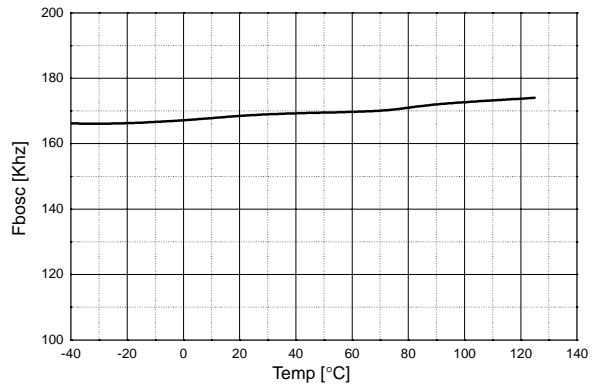


Figure 10. Oscillation Frequency (Burst)

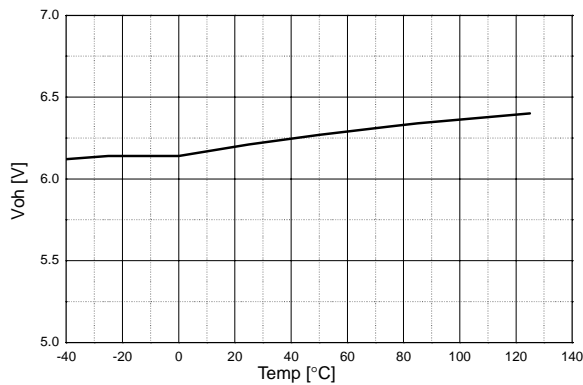


Figure 11. Output High Voltage

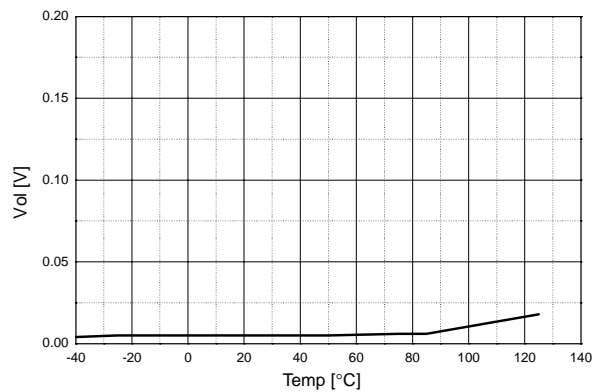


Figure 12. Output Low Voltage

Typical Performance Characteristics (Continued)

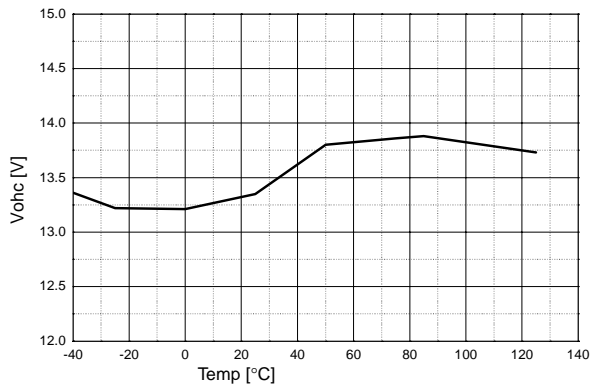


Figure 13. Output High Clamping Voltage

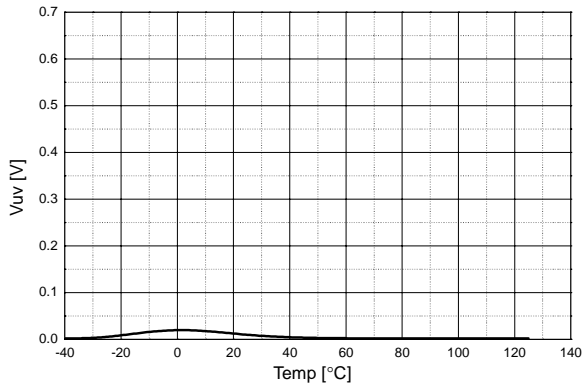


Figure 14. Output Voltage With UVLO Activated

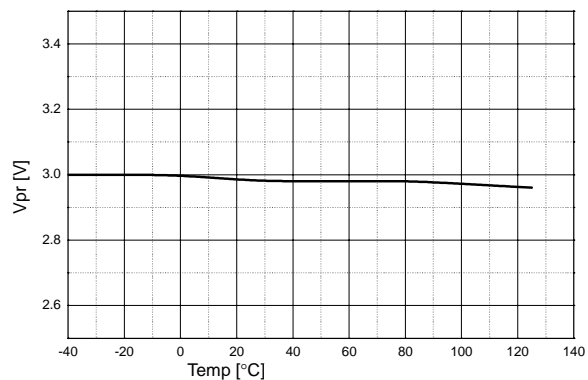


Figure 15. Open Lamp Protection Voltage

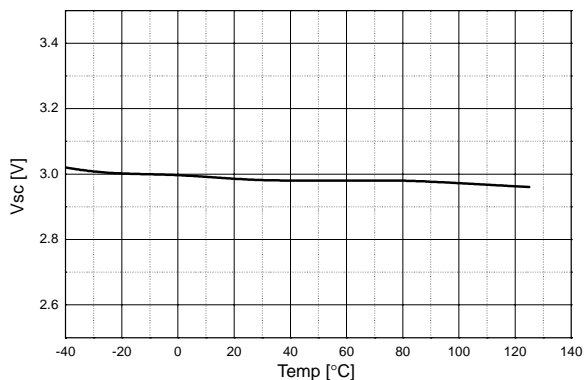


Figure 16. Short Circuit Protection Voltage

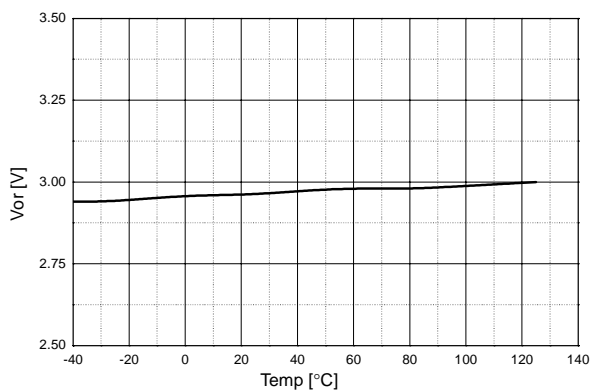


Figure 17. Open Lamp Regulation Voltage

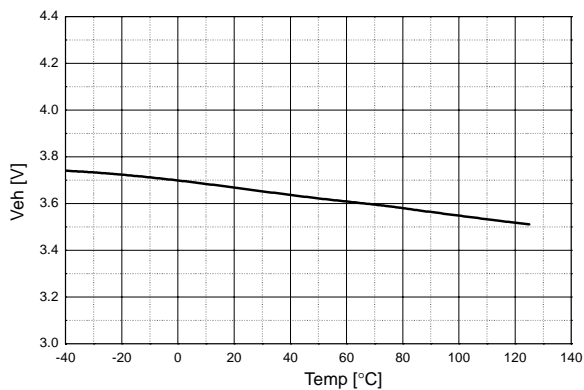


Figure 18. Error Amp Output High Voltage

## Typical Performance Characteristics (Continued)

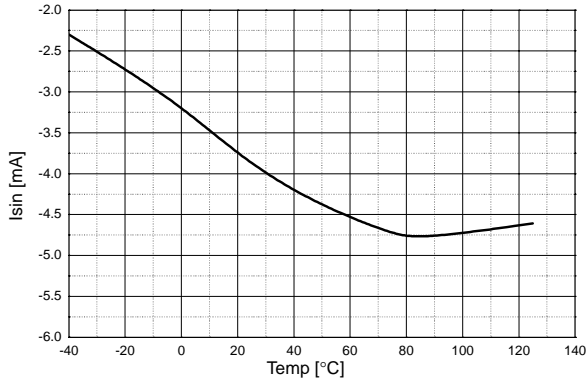


Figure 19. Output Sink Current

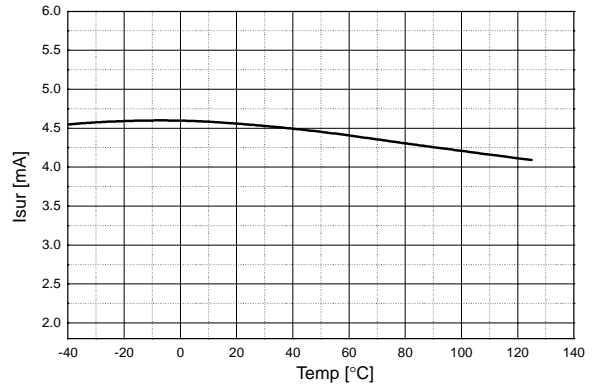


Figure 20. Output Source Current



## Ordering Information

| Product number | Package | Operating Temperature |
|----------------|---------|-----------------------|
| FAN7300G       | 20-SSOP | -25°C ~ 85°C          |

### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.



### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View FAN7300G on WIN SOURCE](#)
-  [ON Semiconductor](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management