



**THE DATASHEET OF
IDT71P72804S167BQ**





18Mb Pipelined QDR™II SRAM Burst of 2

IDT71P72804
IDT71P72604

Features

- ◆ 18Mb Density (1Mx18, 512kx36)
- ◆ Separate, Independent Read and Write Data Ports
 - Supports concurrent transactions
- ◆ Dual Echo Clock Output
- ◆ 2-Word Burst on all SRAM accesses
- ◆ DDR (Double Data Rate) Multiplexed Address Bus
 - One Read and One Write request per clock cycle
- ◆ DDR (Double Data Rate) Data Buses
 - Two word burst data per clock on each port
 - Four word transfers per clock cycle (2 word bursts on 2 ports)
- ◆ Depth expansion through Control Logic
- ◆ HSTL (1.5V) inputs that can be scaled to receive signals from 1.4V to 1.9V.
- ◆ Scalable output drivers
 - Can drive HSTL, 1.8V TTL or any voltage level from 1.4V to 1.9V.
 - Output Impedance adjustable from 35 ohms to 70 ohms
- ◆ Commercial and Industrial Temperature Ranges
- ◆ 1.8V Core Voltage (VDD)
- ◆ 165-ball, 1.0mm pitch, 13mm x 15mm fBGA Package
- ◆ JTAG Interface


Description

The IDT QDRII™ Burst of two SRAMs are high-speed synchronous memories with independent, double-data-rate (DDR), read and write data ports. This scheme allows simultaneous read and write access for the maximum device throughput, with two data items passed with each read or write. Four data word transfers occur per clock cycle, providing quad-data-rate (QDR) performance. Comparing this with standard SRAM common I/O (CIO), single data rate (SDR) devices, a four to one increase in data access is achieved at equivalent clock speeds. Considering that QDRII allows clock speeds in excess of standard SRAM devices, the throughput can be increased well beyond four to one in most applications.

Using independent ports for read and write data access, simplifies system design by eliminating the need for bi-directional buses. All buses associated with the QDRII are unidirectional and can be optimized for signal integrity at very high bus speeds. The QDRII has scalable output impedance on its data output bus and echo clocks, allowing the user to tune the bus for low noise and high performance.

The QDRII has a single DDR address bus with multiplexed read and write addresses. All read addresses are received on the first half of the clock cycle and all write addresses are received on the second half of the clock cycle. The read and write enables are received on the first half of the clock cycle. The byte and nibble write signals are received on both halves of the clock cycle simultaneously with the data they are controlling on the data input bus.

Functional Block Diagram

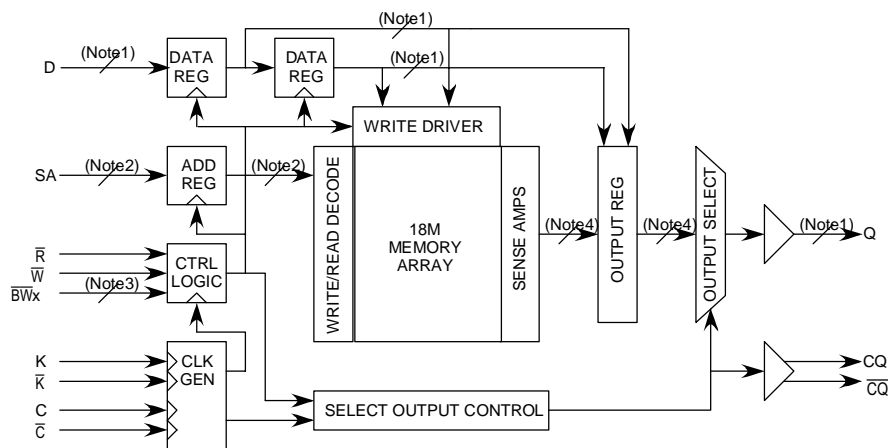

Notes

- 1) Represents 18 signal lines for x18, and 36 signal lines for x36
- 2) Represents 19 address signal lines for x18, and 18 address signal lines for x36.
- 3) Represents 2 signal lines for x18, and 4r signal lines for x36.
- 4) Represents 36 signal lines for x18, and 72 signal lines for x36.

OCTOBER 2008

The QDRII has echo clocks, which provide the user with a clock that is precisely timed to the data output, and tuned with matching impedance and signal quality. The user can use the echo clock for downstream clocking of the data. Echo clocks eliminate the need for the user to produce alternate clocks with precise timing, positioning, and signal qualities to guarantee data capture. Since the echo clocks are generated by the same source that drives the data output, the relationship to the data is not significantly affected by voltage, temperature and process, as would be the case if the clock were generated by an outside source.

All interfaces of the QDRII SRAM are HSTL, allowing speeds beyond SRAM devices that use any form of TTL interface. The interface can be scaled to higher voltages (up to 1.9V) to interface with 1.8V systems if necessary. The device has a V_{DDQ} and a separate V_{ref} , allowing the user to designate the interface operational voltage, independent of the device core voltage of 1.8V V_{DD} . The output impedance control allows the user to adjust the drive strength to adapt to a wide range of loads and transmission lines.

The device is capable of sustaining full bandwidth on both the input and output ports simultaneously. All data is in two word bursts, with addressing capability to the burst level.

Clocking

The QDRII SRAM has two sets of input clocks, namely the K , \bar{K} clocks and the C , \bar{C} clocks. In addition, the QDRII has an output "echo" clock, CQ , \bar{CQ} .

The K and \bar{K} clocks are the primary device input clocks. The K clock is, used to clock in the control signals (\bar{R} , \bar{W} and \bar{BW}_x), the read address, and the first word of the data burst during a write operation. The \bar{K} clock is used to clock in the control signals (BW_x), write address and the second word of the data burst during a write operation. The K and \bar{K} clocks are also used internally by the SRAM. In the event that the user disables the C and \bar{C} clocks, the K and \bar{K} clocks will also be used to clock the data out of the output register and generate the echo clock. The C and \bar{C} clocks may be used to clock the data out of the output register during read operations and to generate the echo clocks. C and \bar{C} must be presented to the SRAM within the timing tolerances. The output data from the QDRII will be closely aligned to the C and \bar{C} input, through the use of an internal DLL. When C is presented to the QDRII SRAM, the DLL will have already internally clocked the first data word to arrive at the device output simultaneously with the arrival of the \bar{C} clock.

The C clock and second data word of the burst will also correspond.

Single Clock Mode

The QDRII SRAM may be operated with a single clock pair. C and \bar{C} may be disabled by tying both signals high, forcing the outputs and echo clocks to be controlled instead by the K and \bar{K} clocks.

DLL Operation

The DLL in the output structure of the QDRII SRAM can be used to closely align the incoming clocks C and \bar{C} with the output of the data, generating very tight tolerances between the two. The user may disable the DLL by holding \bar{Doff} low. With the DLL off, the C and \bar{C} (or K and \bar{K} if C and \bar{C} are not used) will directly clock the output register of the SRAM. With the DLL off, there will be a propagation delay from the time the clock enters the device until the data appears at the output.

Echo Clock

The echo clocks, CQ and \bar{CQ} , are generated by the C and \bar{C} clocks (or K , \bar{K} if C , \bar{C} are disabled). The rising edge of C generates the rising edge of CQ , and the falling edge of \bar{CQ} . The rising edge of \bar{C} generates the rising edge of \bar{CQ} and the falling edge of CQ . This scheme improves the correlation of the rising and falling edges of the echo clock and will improve the duty cycle of the individual signals.

The echo clock is very closely aligned with the data, guaranteeing that the echo clock will remain closely correlated with the data, within the tolerances designated.

Read and Write Operations

QDRII devices internally store the two words of the burst as a single, wide word and will retain their order in the burst. There is no ability to address to the single word level or reverse the burst order; however, the byte and nibble write signals can be used to prevent writing any individual bytes, or combined to prevent writing one word of the burst.

Read operations are initiated by holding the read port select (\bar{R}) low, and presenting the read address to the address port during the rising edge of K which will latch the address. The data will then be read and will appear at the device output at the designated time in correspondence with the C and \bar{C} clocks.

Write operations are initiated by holding the write port select (\bar{W}) low and designating with the Byte Write inputs (\bar{BW}_x) which bytes are to be written. The first word of the data must also be present on the data input bus $D[X:0]$. Upon the rising edge of K the first word of the burst will be latched into the input register. After K has risen, and the designated hold times observed, the second half of the clock cycle is initiated by presenting the write address to the address bus $SA[X:0]$, the \bar{BW}_x inputs for the second data word of the burst, and the second data item of the burst to the data bus $D[X:0]$. Upon the rising edge of \bar{K} , the second word of the burst will be latched, along with the designated address. Both the first and second words of the burst will then be written into memory as designated by the address and byte write enables.

Output Enables

The QDRII SRAM automatically enables and disables the $Q[X:0]$ outputs. When a valid read is in progress, and data is present at the output, the output will be enabled. If no valid data is present at the output (read not active), the output will be disabled (high impedance). The echo clocks will remain valid at all times and cannot be disabled or turned off. During power-up the Q outputs will come up in a high impedance state.

Programmable Impedance

An external resistor, R_Q , must be connected between the ZQ pin on the SRAM and V_{SS} to allow the SRAM to adjust its output drive impedance. The value of R_Q must be 5X the value of the intended drive impedance of the SRAM. The allowable range of R_Q to guarantee impedance matching with a tolerance of +/- 10% is between 175 ohms and 350 ohms, with $V_{DDQ} = 1.5V$. The output impedance is adjusted every 1024 clock cycles to correct for drifts in supply voltage and temperature. If the user wishes to drive the output impedance of the SRAM to its lowest value, the ZQ pin may be tied to V_{DDQ} .

Pin Definitions

| Symbol | Pin Function | Description |
|--|--------------------|---|
| D[X:0] | Input Synchronous | Data input signals, sampled on the rising edge of K and \bar{K} clocks during valid write operations 1M x 18 -- D[17:0] 512K x 36 -- D[35:0] |
| $\bar{B}W_0, \bar{B}W_1$ $\bar{B}W_2, \bar{B}W_3$ | Input Synchronous | Byte Write Select 0, 1, 2, and 3 are active LOW. Sampled on the rising edge of the K and again on the rising edge of \bar{K} clocks during write operations. Used to select which byte is written into the device during the current portion of the write operations. Bytes not written remain unaltered. All the byte writes are sampled on the same edge as the data. Deselecting a Byte Write Select will cause the corresponding byte of data to be ignored and not written in to the device. 1M x 18 -- $\bar{B}W_0$ controls D[8:0] and $\bar{B}W_1$ controls D[17:9] 512K x 36 -- $\bar{B}W_0$ controls D[8:0], $\bar{B}W_1$ controls D[17:9], $\bar{B}W_2$ controls D[26:18] and $\bar{B}W_3$ controls D[35:27] |
| SA | Input Synchronous | Address Inputs. Read addresses are sampled on the rising edge of K clock during active read operations. Write addresses are sampled on the rising edge of \bar{K} clock during active write operations. These address inputs are multiplexed, so that both a read and write operation can occur on the same clock cycle. These inputs are ignored when the appropriate port is deselected. |
| Q[X:0] | Output Synchronous | Data Output signals. These pins drive out the requested data during a Read operation. Valid data is driven out on the rising edge of both the C and \bar{C} clocks during Read operations or K and \bar{K} when operating in single clock mode. When the Read port is deselected, Q[X:0] are automatically three-stated. |
| \bar{W} | Input Synchronous | Write Control Logic active Low. Sampled on the rising edge of the positive input clock (K). When asserted active, a write operation is initiated. Deasserting will deselect the Write port. Deselecting the Write port will cause D[X:0] to be ignored. |
| \bar{R} | Input Synchronous | Read Control Logic, active LOW. Sampled on the rising edge of Positive Input Clock (K). When active, a Read operation is initiated. Deasserting will cause the Read port to be deselected. When deselected, the pending access is allowed to complete and the output drivers are automatically three-stated following the next rising edge of the C clock. Each read access consists of a burst of two sequential transfer. |
| C | Input Clock | Positive Output Clock Input. C is used in conjunction with \bar{C} to clock out the Read data from the device. C and \bar{C} can be used together to deskew the flight times of various devices on the board back to the controller. See application example for further details. |
| \bar{C} | Input Clock | Negative Output Clock Input. \bar{C} is used in conjunction with C to clock out the Read data from the device. C and \bar{C} can be used together to deskew the flight times of various devices on the board back to the controller. See application example for further details. |
| K | Input Clock | Positive Input Clock Input. The rising edge of K is used to capture synchronous inputs to the device and to drive out data through Q[X:0] when in single clock mode. All accesses are initiated on the rising edge of K. |
| \bar{K} | Input Clock | Negative Input Clock Input. \bar{K} is used to capture synchronous inputs being presented to the device and to drive out data through Q[X:0] when in single clock mode. |
| CQ, $\bar{C}Q$ | Output Clock | Synchronous Echo clock outputs. The rising edges of these outputs are tightly matched to the synchronous data outputs and can be used as a data valid indication. These signals are free running and do not stop when the output data is tri-stated. |
| ZQ | Input | Output Impedance Matching Input. This input is used to tune the device outputs to the system data bus impedance. Q[X:0] output impedance is set to $0.2 \times RQ$, where RQ is a resistor connected between ZQ and ground. Alternately, this pin can be connected directly to VDDQ, which enables the minimum impedance mode. This pin cannot be connected directly to GND or left unconnected. |

Pin Definitions continued

| Symbol | Pin Function | Description |
|--------------------------|-----------------|--|
| $\overline{\text{Doff}}$ | Input | DLL Turn Off. When low this input will turn off the DLL inside the device. The AC timings with the DLL turned off will be different from those listed in this data sheet. There will be an increased propagation delay from the incidence of C and $\overline{\text{C}}$ to Q, or K and $\overline{\text{K}}$ to Q as configured. The propagation delay is not a tested parameter, but will be similar to the propagation delay of other SRAM devices in this speed grade. |
| TDO | Output | TDO pin for JTAG |
| TCK | Input | TCK pin for JTAG. |
| TDI | Input | TDI pin for JTAG. An internal resistor will pull TDI to VDD when the pin is unconnected. |
| TMS | Input | TMS pin for JTAG. An internal resistor will pull TMS to VDD when the pin is unconnected. |
| NC | No Connect | No connects inside the package. Can be tied to any voltage level |
| VREF | Input Reference | Reference Voltage input. Static input used to set the reference level for HSTL inputs and Outputs as well as AC measurement points. |
| VDD | Power Supply | Power supply inputs to the core of the device. Should be connected to a 1.8V power supply. |
| VSS | Ground | Ground for the device. Should be connected to ground of the system. |
| VDDQ | Power Supply | Power supply for the outputs of the device. Should be connected to a 1.5V power supply for HSTL or scaled to the desired output voltage. |

6109 tbl 02b

Pin Configuration IDT71P72804 (1M x 18)

| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |
|---|--------------------------|---------------------------|--------------------------|-----------------------|--------------------------|-----------------------|--------------------------|-----------------------|------|---------------------------|-----|
| A | $\overline{\text{CQ}}$ | VSS/ SA ⁽³⁾ | NC/ SA ⁽¹⁾ | $\overline{\text{W}}$ | $\overline{\text{BW}}_1$ | $\overline{\text{K}}$ | NC | $\overline{\text{R}}$ | SA | VSS/ SA ⁽²⁾ | CQ |
| B | NC | Q9 | D9 | SA | NC | K | $\overline{\text{BW}}_0$ | SA | NC | NC | Q8 |
| C | NC | NC | D10 | VSS | SA | SA | SA | VSS | NC | Q7 | D8 |
| D | NC | D11 | Q10 | VSS | VSS | VSS | VSS | VSS | NC | NC | D7 |
| E | NC | NC | Q11 | VDDQ | VSS | VSS | VSS | VDDQ | NC | D6 | Q6 |
| F | NC | Q12 | D12 | VDDQ | VDD | VSS | VDD | VDDQ | NC | NC | Q5 |
| G | NC | D13 | Q13 | VDDQ | VDD | VSS | VDD | VDDQ | NC | NC | D5 |
| H | $\overline{\text{Doff}}$ | VREF | VDDQ | VDDQ | VDD | VSS | VDD | VDDQ | VDDQ | VREF | ZQ |
| J | NC | NC | D14 | VDDQ | VDD | VSS | VDD | VDDQ | NC | Q4 | D4 |
| K | NC | NC | Q14 | VDDQ | VDD | VSS | VDD | VDDQ | NC | D3 | Q3 |
| L | NC | Q15 | D15 | VDDQ | VSS | VSS | VSS | VDDQ | NC | NC | Q2 |
| M | NC | NC | D16 | VSS | VSS | VSS | VSS | VSS | NC | Q1 | D2 |
| N | NC | D17 | Q16 | VSS | SA | SA | SA | VSS | NC | NC | D1 |
| P | NC | NC | Q17 | SA | SA | C | SA | SA | NC | D0 | Q0 |
| R | TDO | TCK | SA | SA | SA | $\overline{\text{C}}$ | SA | SA | SA | TMS | TDI |

6109 tbl 12b

165-ball FBGA Pinout TOP VIEW

NOTES:

1. A3 is reserved for the 36Mb expansion address.
2. A10 is reserved for the 72Mb expansion address. This must be tied or driven to VSS on the 1M x 18 QDR II Burst of 2 (71P72804) devices.
3. A2 is reserved for the 144Mb expansion address. This must be tied or driven to VSS on the 1M x 18 QDR II Burst of 2 (71P72804) devices.

Pin Configuration IDT71P72604 (512K x 36)

| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |
|---|-------------------|---------------------------|--------------------------|----------------|-------------------|----------------|-------------------|----------------|--------------------------|---------------------------|-----|
| A | \overline{CQ} | VSS/ SA ⁽⁴⁾ | NC/ SA ⁽²⁾ | \overline{W} | \overline{BW}_2 | \overline{K} | \overline{BW}_1 | \overline{R} | NC/ SA ⁽¹⁾ | VSS/ SA ⁽³⁾ | CQ |
| B | Q27 | Q18 | D18 | SA | \overline{BW}_3 | K | \overline{BW}_0 | SA | D17 | Q17 | Q8 |
| C | D27 | Q28 | D19 | VSS | SA | SA | SA | VSS | D16 | Q7 | D8 |
| D | D28 | D20 | Q19 | VSS | VSS | VSS | VSS | VSS | Q16 | D15 | D7 |
| E | Q29 | D29 | Q20 | VDDQ | VSS | VSS | VSS | VDDQ | Q15 | D6 | Q6 |
| F | Q30 | Q21 | D21 | VDDQ | VDD | VSS | VDD | VDDQ | D14 | Q14 | Q5 |
| G | D30 | D22 | Q22 | VDDQ | VDD | VSS | VDD | VDDQ | Q13 | D13 | D5 |
| H | \overline{Doff} | VREF | VDDQ | VDDQ | VDD | VSS | VDD | VDDQ | VDDQ | VREF | ZQ |
| J | D31 | Q31 | D23 | VDDQ | VDD | VSS | VDD | VDDQ | D12 | Q4 | D4 |
| K | Q32 | D32 | Q23 | VDDQ | VDD | VSS | VDD | VDDQ | Q12 | D3 | Q3 |
| L | Q33 | Q24 | D24 | VDDQ | VSS | VSS | VSS | VDDQ | D11 | Q11 | Q2 |
| M | D33 | Q34 | D25 | VSS | VSS | VSS | VSS | VSS | D10 | Q1 | D2 |
| N | D34 | D26 | Q25 | VSS | SA | SA | SA | VSS | Q10 | D9 | D1 |
| P | Q35 | D35 | Q26 | SA | SA | C | SA | SA | Q9 | D0 | Q0 |
| R | TDO | TCK | SA | SA | SA | \overline{C} | SA | SA | SA | TMS | TDI |

6109 tbl 12c

165-ball FBGA Pinout TOP VIEW

NOTES:

1. A9 is reserved for the 36Mb expansion address.
2. A3 is reserved for the 72Mb expansion address.
3. A10 is reserved for the 144Mb expansion address. This must be tied or driven to VSS on the 512K x 36 QDR II Burst of 2 (71P72604) devices.
4. A2 is reserved for the 288Mb expansion address. This must be tied or driven to VSS on the 512K x 36 QDR II Burst of 2 (71P72604) devices.

Absolute Maximum Ratings^{(1) (2)}

| Symbol | Rating | Value | Unit |
|-------------------|--|-------------------------------|------|
| V _{TERM} | Supply Voltage on V _{DD} with Respect to GND | -0.5 to +2.9 | V |
| V _{TERM} | Supply Voltage on V _{DDQ} with Respect to GND | -0.5 to V _{DD} +0.3 | V |
| V _{TERM} | Voltage on Input terminals with respect to GND. | -0.5 to V _{DD} +0.3 | V |
| V _{TERM} | Voltage on Output and I/O terminals with respect to GND. | -0.5 to V _{DDQ} +0.3 | V |
| T _{BIAS} | Temperature Under Bias | -55 to +125 | °C |
| T _{STG} | Storage Temperature | -65 to +150 | °C |
| I _{OUT} | Continuous Current into Outputs | ± 20 | mA |

NOTES:

6109 tbl 05

- Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
- V_{DDQ} must not exceed V_{DD} during normal operation.

Write Descriptions^(1,2,3)

| Signal | \overline{BW}_0 | \overline{BW}_1 | \overline{BW}_2 | \overline{BW}_3 |
|--------------|-------------------|-------------------|-------------------|-------------------|
| Write Byte 0 | L | X | X | X |
| Write Byte 1 | X | L | X | X |
| Write Byte 2 | X | X | L | X |
| Write Byte 3 | X | X | X | L |

NOTES:

6109 tbl 09

- All byte write (\overline{BW}_x) signals are sampled on the rising edge of K and again on \overline{K} . The data that is present on the data bus in the designated byte will be latched into the input if the corresponding \overline{BW}_x is held low. The rising edge of K will sample the first byte of the two word burst and the rising edge of \overline{K} will sample the second byte of the two word burst.
- The availability of the \overline{BW}_x on designated devices is described in the pin description table.
- The QDR II Burst of two SRAM has data forwarding. A read request that is initiated on the same cycle as a write request to the same address will produce the newly written data in response to the read request.

Capacitance (TA = +25°C, f = 1.0MHz)⁽¹⁾

| Symbol | Parameter | Conditions | Max. | Unit |
|------------------|-------------------------|---|------|------|
| C _{IN} | Input Capacitance | V _{DD} = 1.8V V _{DDQ} = 1.5V | 5 | pF |
| C _{CLK} | Clock Input Capacitance | | 6 | pF |
| C _O | Output Capacitance | | 7 | pF |

NOTE:

6109 tbl 06

- Tested at characterization and retested after any design or process change that may affect these parameters.

Recommended DC Operating and Temperature Conditions


| Symbol | Parameter | Min. | Typ. | Max. | Unit |
|------------------|------------------------------------|------------|---------------------|-----------------|------|
| V _{DD} | Power Supply Voltage | 1.7 | 1.8 | 1.9 | V |
| V _{DDQ} | I/O Supply Voltage | 1.4 | 1.5 | V _{DD} | V |
| V _{SS} | Ground | 0 | 0 | 0 | V |
| V _{REF} | Input Reference Voltage | 0.68 | V _{DDQ} /2 | 0.95 | V |
| T _A | Ambient Temperature ⁽¹⁾ | Commercial | 0 to +70 | | °C |
| | | Industrial | -40 to +85 | | °C |

NOTE:

6109 tbl 04

- During production testing, the case temperature equals the ambient temperature.

Application Example

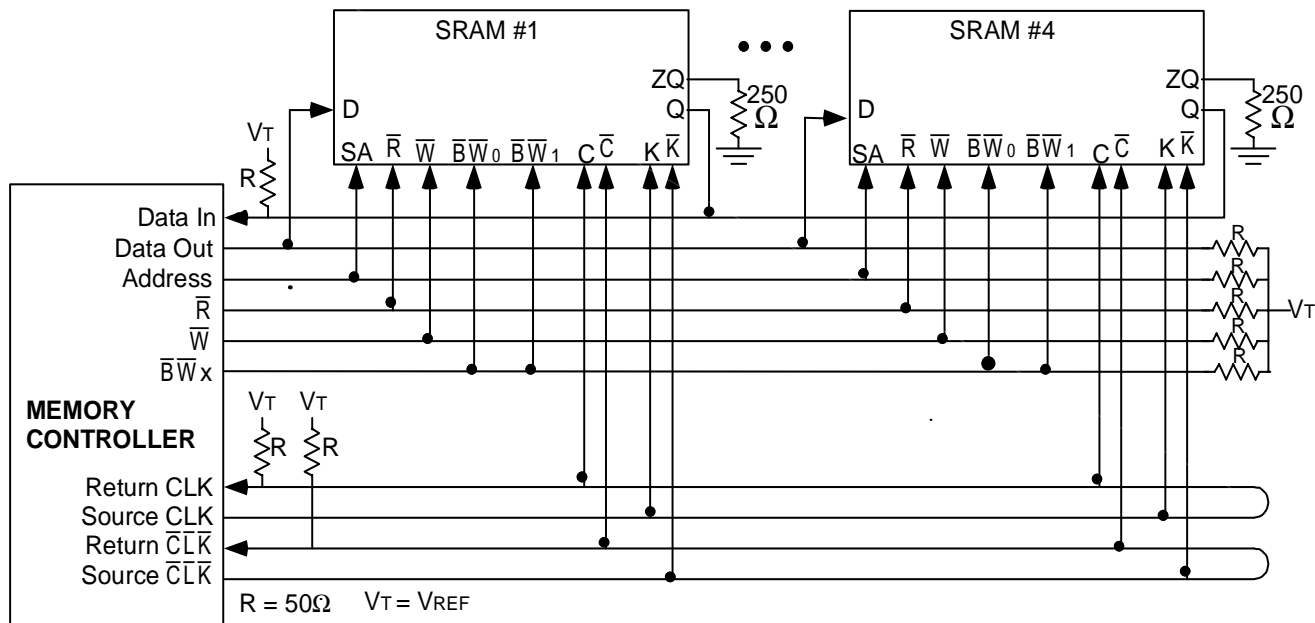

6109 drw 20

DC Electrical Characteristics Over the Operating Temperature and Supply Voltage Range ($V_{DD} = 1.8 \pm 100\text{mV}$, $V_{DDQ} = 1.4\text{V to } 1.9\text{V}$)

| Parameter | Symbol | Test Conditions | Min | Max | Unit | Note | | |
|------------------------------|--------|---|--------------------|--------------------|---------------|------|----|-----|
| Input Leakage Current | IIL | $V_{DD} = \text{Max } V_{IN} = V_{SS} \text{ to } V_{DDQ}$ | -2 | +2 | μA | | | |
| Output Leakage Current | IOL | Output Disabled | -2 | +2 | μA | | | |
| | | | | Com'l | Ind | | | |
| Operating Current (x36): DDR | IDD | $V_{DD} = \text{Max}$, $I_{OUT} = 0\text{mA}$ (outputs open), Cycle Time $\geq t_{KHK}$ Min | 200MHz | - | 950 | 1000 | mA | 1 |
| | | | 167MHz | - | 850 | 900 | | |
| Operating Current (x18): DDR | IDD | $V_{DD} = \text{Max}$, $I_{OUT} = 0\text{mA}$ (outputs open), Cycle Time $\geq t_{KHK}$ Min | 250MHz | - | 850 | - | mA | 1,8 |
| | | | 200MHz | - | 750 | 800 | | |
| | | | 167MHz | - | 650 | 700 | | |
| Standby Current: NOP | ISB1 | Device Deselected (in NOP state), $I_{OUT} = 0\text{mA}$ (outputs open), $f = \text{Max}$, All Inputs $\leq 0.2\text{V}$ or $\geq V_{DD} - 0.2\text{V}$ | 250MHz | - | 375 | - | mA | 2,8 |
| | | | 200MHz | - | 335 | 385 | | |
| | | | 167MHz | - | 300 | 350 | | |
| Output High Voltage | VOH1 | $R_Q = 250\Omega$, $I_{OH} = -15\text{mA}$ | $V_{DDQ}/2 - 0.12$ | $V_{DDQ}/2 + 0.12$ | V | 3,7 | | |
| Output Low Voltage | VOL1 | $R_Q = 250\Omega$, $I_{OL} = 15\text{mA}$ | $V_{DDQ}/2 - 0.12$ | $V_{DDQ}/2 + 0.12$ | V | 4,7 | | |
| Output High Voltage | VOH2 | $I_{OH} = -0.1\text{mA}$ | $V_{DDQ} - 0.2$ | V_{DDQ} | V | 5 | | |
| Output Low Voltage | VOL2 | $I_{OL} = 0.1\text{mA}$ | VSS | 0.2 | V | 6 | | |

6109 tbl 10c

NOTES:

- Operating Current is measured at 100% bus utilization.
- Standby Current is only after all pending read and write burst operations are completed.
- Outputs are impedance-controlled. $I_{OH} = -(V_{DDQ}/2)/(R_Q/5)$ and is guaranteed by device characterization for $175\Omega \leq R_Q < 350\Omega$. This parameter is tested at $R_Q = 250\Omega$, which gives a nominal 50Ω output impedance.
- Outputs are impedance-controlled. $I_{OL} = (V_{DDQ}/2)/(R_Q/5)$ and is guaranteed by device characterization for $175\Omega \leq R_Q < 350\Omega$. This parameter is tested at $R_Q = 250\Omega$, which gives a nominal 50Ω output impedance.
- This measurement is taken to ensure that the output has the capability of pulling to the V_{DDQ} rail, and is not intended to be used as an impedance measurement point.
- This measurement is taken to ensure that the output has the capability of pulling to V_{SS} , and is not intended to be used as an impedance measurement point.
- Programmable Impedance Mode.
- Industrial temperature range is not available for the 250MHz speed grade.

Input Electrical Characteristics Over the Operating Temperature and Supply Voltage Range

(VDD = 1.8 ± 100mV, VDDQ = 1.4V to 1.9V)


| Parameter | Symbol | Min | Max | Unit | Notes |
|------------------------|----------|-----------|-----------|------|-------|
| Input High Voltage, DC | VIH (DC) | VREF +0.1 | VDDQ +0.3 | V | 1,2 |
| Input Low Voltage, DC | VIL (DC) | -0.3 | VREF -0.1 | V | 1,3 |
| Input High Voltage, AC | VIH (AC) | VREF +0.2 | - | V | 4,5 |
| Input Low Voltage, AC | VIL (AC) | - | VREF -0.2 | V | 4,5 |

NOTES:

6109 tbl 10d


- These are DC test criteria. DC design criteria is VREF ± 50mV. The AC VIH/VIL levels are defined separately for measuring timing parameters.
- VIH (Max) DC = VDDQ+0.3, VIH (Max) AC = VDD +0.5V (pulse width ≤20% tKHKH (min))
- VIL (Min) DC = -0.3V, VIL (Min) AC = -0.5V (pulse width ≤20% tKHKH (min))
- This condition is for AC function test only, not for AC parameter test.
- To maintain a valid level, the transitioning edge of the input must:
 - Sustain a constant slew rate from the current AC level through the target AC level, VIL(AC) or VIH(AC)
 - Reach at least the target AC level.
 - After the AC target level is reached, continue to maintain at least the target DC level, VIL(DC) or VIH(DC)

Undershoot Timing

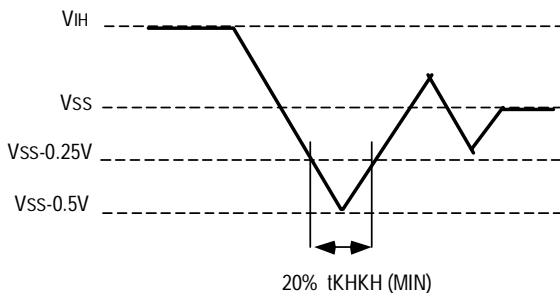

6109 drw 22

Overshoot Timing

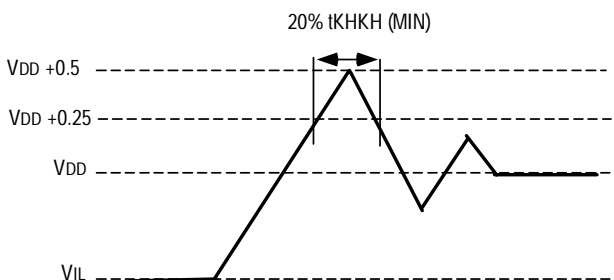

6109 drw 21

AC Test Conditions⁽¹⁾


| Parameter | Symbol | Value | Unit |
|-------------------------------|-----------------|---------------|------|
| Core Power Supply Voltage | VDD | 1.7 to 1.9 | V |
| I/O Power Supply Voltage | VDDQ | 1.4 to VDD | V |
| Input High Level | V _{IH} | (VDDQ/2)+ 0.5 | V |
| Input Low Level | V _{IL} | (VDDQ/2)- 0.5 | V |
| Input Reference Level | VREF | VDDQ/2 | V |
| Input Rise/Fall Time | TR/TF | 0.3/0.3 | ns |
| Output Timing Reference Level | | VDDQ/2 | V |

NOTE:


6109bl 11a

- Parameters are tested with R_Q=250Ω


Input Waveform

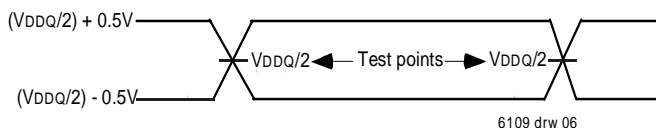

Output Waveform

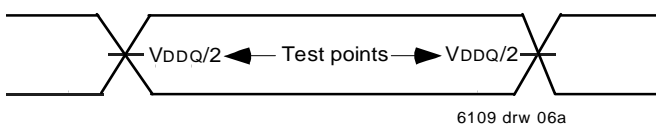

AC Test Load

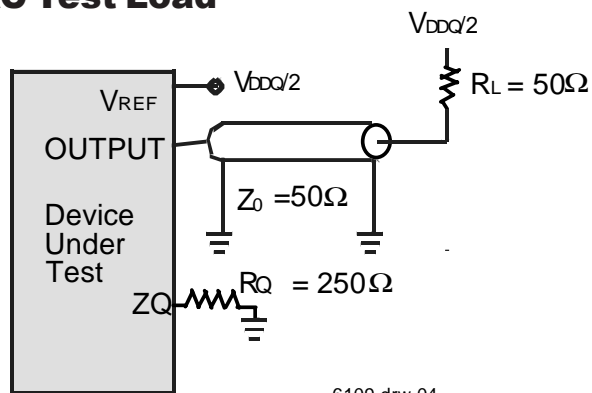

AC Electrical Characteristics

(VDD = 1.8 ± 100mV, VDDQ = 1.4V to 1.9V, Commercial and Industrial Temperature Ranges) (3,7)


| Symbol | Parameter | 250MHz ^(10,11) | | 200MHz | | 167MHz | | Unit | Notes |
|--------------------------------------|--|---------------------------|------|--------|------|--------|------|--------|-------|
| | | Min. | Max | Min. | Max | Min. | Max | | |
| Clock Parameters | | | | | | | | | |
| t _{KHKH} | Clock Cycle Time (K, \bar{K} , C, \bar{C}) | 4.00 | 6.30 | 5.00 | 7.88 | 6.00 | 8.40 | ns | |
| t _{KC var} | Clock Phase Jitter (K, \bar{K} , C, \bar{C}) | - | 0.20 | - | 0.20 | - | 0.20 | ns | 1,5 |
| t _{KHKL} | Clock High Time (K, \bar{K} , C, \bar{C}) | 1.60 | - | 2.00 | - | 2.40 | - | ns | 8 |
| t _{KLKH} | Clock LOW Time (K, \bar{K} , C, \bar{C}) | 1.60 | - | 2.00 | - | 2.40 | - | ns | 8 |
| t _{KH\bar{K}H} | Clock to $\bar{\text{clock}}$ (K → \bar{K} , C → \bar{C}) | 1.80 | - | 2.20 | - | 2.70 | - | ns | 9 |
| t $\bar{\text{K}}$ HKH | $\bar{\text{Clock}}$ to clock (\bar{K} → K, \bar{C} → C) | 1.80 | - | 2.20 | - | 2.70 | - | ns | 9 |
| t _{KHCH} | Clock to data clock (K → C, \bar{K} → \bar{C}) | 0.00 | 1.80 | 0.00 | 2.30 | 0.00 | 2.80 | ns | |
| t _{KC lock} | DLL lock time (K, C) | 1024 | - | 1024 | - | 1024 | - | cycles | 2 |
| t _{KC reset} | K static to DLL reset | 30 | - | 30 | - | 30 | - | ns | |
| Output Parameters | | | | | | | | | |
| t _{CHOV} | C, \bar{C} HIGH to output valid | - | 0.45 | - | 0.45 | - | 0.50 | ns | 3 |
| t _{CHOX} | C, \bar{C} HIGH to output hold | -0.45 | - | -0.45 | - | -0.50 | - | ns | 3 |
| t _{CHCOV} | C, \bar{C} HIGH to echo clock valid | - | 0.45 | - | 0.45 | - | 0.50 | ns | 3 |
| t _{CHCOX} | C, \bar{C} HIGH to echo clock hold | -0.45 | - | -0.45 | - | -0.50 | - | ns | 3 |
| t _{COHOV} | CQ, \bar{CQ} HIGH to output valid | - | 0.30 | - | 0.35 | - | 0.40 | ns | |
| t _{COHOX} | CQ, \bar{CQ} HIGH to output hold | -0.30 | - | -0.35 | - | -0.40 | - | ns | |
| t _{CHOZ} | \bar{C} HIGH to output High-Z | - | 0.45 | - | 0.45 | - | 0.50 | ns | 3,4,5 |
| t _{CHOX1} | \bar{C} HIGH to output Low-Z | -0.45 | - | -0.45 | - | -0.50 | - | ns | 3,4,5 |
| Set-Up Times | | | | | | | | | |
| t _{AVKH} | Address valid to K, \bar{K} rising edge | 0.35 | - | 0.40 | - | 0.50 | - | ns | 6 |
| t _{IVKH} | \bar{R} , \bar{W} inputs valid to K, \bar{K} rising edge | 0.35 | - | 0.40 | - | 0.50 | - | ns | |
| t _{DVKH} | Data-in and \bar{BWX} valid to K, \bar{K} rising edge | 0.35 | - | 0.40 | - | 0.50 | - | ns | |
| Hold Times | | | | | | | | | |
| t _{KHAX} | K, \bar{K} rising edge to address hold | 0.35 | - | 0.40 | - | 0.50 | - | ns | 6 |
| t _{KHIX} | K, \bar{K} rising edge to \bar{R} , \bar{W} inputs hold | 0.35 | - | 0.40 | - | 0.50 | - | ns | |
| t _{KHDX} | K, \bar{K} rising edge to data-in and \bar{BWX} hold | 0.35 | - | 0.40 | - | 0.50 | - | ns | |

6109 tbl 11

NOTES:

- Clock phase jitter is the variance from clock rising edge to the next expected clock rising edge.
- V_{dd} slew rate must be less than 0.1V DC per 50 ns for DLL lock retention. DLL lock time begins once V_{dd} and input clock are stable.
- If C, \bar{C} are tied High, K, \bar{K} become the references for C, \bar{C} timing parameters.
- To avoid bus contention, at a given voltage and temperature t_{CHOX1} is bigger than t_{CHOZ}.
The specs as shown do not imply bus contention because t_{CHOX1} is a MIN parameter that is worse case at totally different test conditions (0°C, 1.9V) than t_{CHOZ}, which is a MAX parameter (worst case at 70°C, 1.7V).
It is not possible for two SRAMs on the same board to be at such different voltage and temperature.
- This parameter is guaranteed by device characterization, but not production tested.
- All address inputs must meet the specified setup and hold times for all latching clock edges.
- During production testing, the case temperature equals T_A.
- Clock High Time (t_{KHKL}) and Clock Low Time (t_{KLKH}) should be within 40% to 60% of the cycle time (t_{KHKH}).
- Clock to Clock time (t_{KHKH}) and Clock to Clock time (t_{KHKH}) should be within 45% to 55% of the cycle time (t_{KHKH}).
- The 250MHz speed grade is not available in the 512K x 36-bit option.
- Industrial temperature range is not available for the 250MHz speed grade.

Timing Waveform of Combined Read and Write Cycles

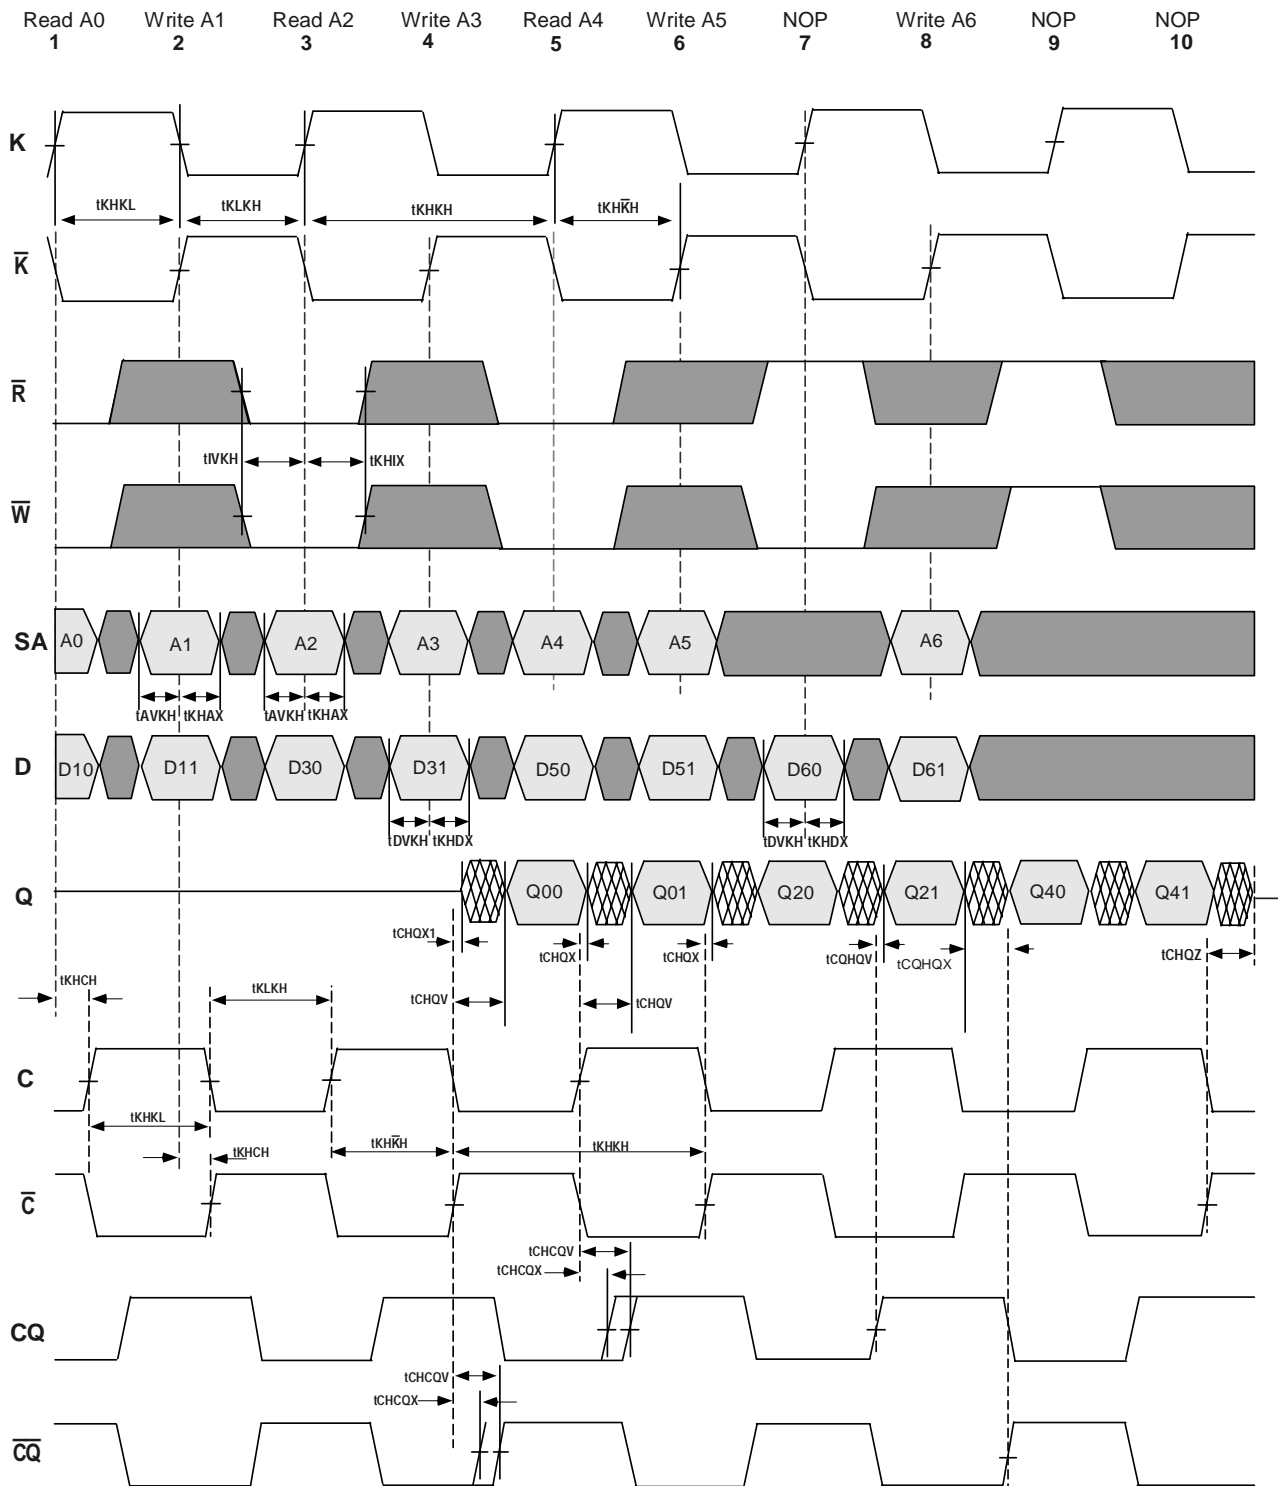


6109 drw 09a

IEEE 1149.1 TEST ACCESS PORT AND BOUNDARY SCAN-JTAG

This part contains an IEEE standard 1149.1 Compatible Test Access Port (TAP). The package pads are monitored by the Serial Scan circuitry when in test mode. This is to support connectivity testing during manufacturing and system diagnostics. In conformance with IEEE 1149.1, the SRAM contains a TAP controller, Instruction register, Bypass Register and ID register. The TAP controller has a standard 16-state machine that resets internally upon power-up; therefore, the TRST signal is not

required. It is possible to use this device without utilizing the TAP. To disable the TAP controller without interfacing with normal operation of the SRAM, TCK must be tied to VSS to preclude a mid level input. TMS and TDI are designed so an undriven input will produce a response identical to the application of a logic 1, and may be left unconnected, but they may also be tied to VDD through a resistor. TDO should be left unconnected.

JTAG Block Diagram

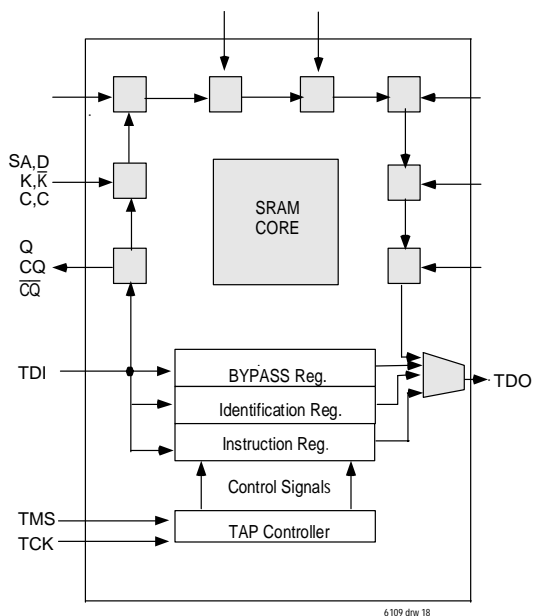

JTAG Instruction Coding


| IR2 | IR1 | IR0 | Instruction | TDO Output | Notes |
|-----|-----|-----|----------------|-------------------------|-------|
| 0 | 0 | 0 | EXTEST | Boundary Scan Register | |
| 0 | 0 | 1 | IDCODE | Identification register | 2 |
| 0 | 1 | 0 | SAMPLE-Z | Boundary Scan Register | 1 |
| 0 | 1 | 1 | RESERVED | Do Not Use | 5 |
| 1 | 0 | 0 | SAMPLE/PRELOAD | Boundary Scan register | 4 |
| 1 | 0 | 1 | RESERVED | Do Not Use | 5 |
| 1 | 1 | 0 | RESERVED | Do Not Use | 5 |
| 1 | 1 | 1 | BYPASS | Bypass Register | 3 |

6109tbl 13

NOTES:

1. Places Qs in Hi-Z in order to sample all input data regardless of other SRAM inputs.
2. TDI is sampled as an input to the first ID register to allow for the serial shift of the external TDI data.
3. Bypass register is initialized to VSS when BYPASS instruction is invoked. The Bypass Register also holds serially loaded TDI when exiting the Shift DR states.
4. SAMPLE instruction does not place output pins in Hi-Z.
5. This instruction is reserved for future use.

TAP Controller State Diagram

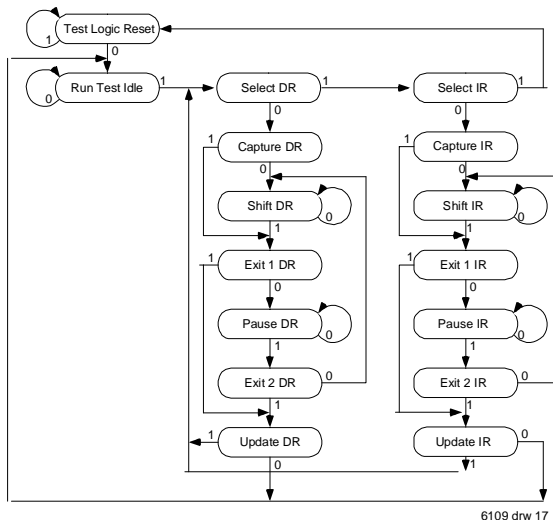

6109 drw 17

Scan Register Definition

| Part | Instruction Register | Bypass Register | ID Register | Boundary Scan |
|---------|----------------------|-----------------|-------------|---------------|
| 512Kx36 | 3 bits | 1 bit | 32 bits | 107 bits |
| 1Mx18 | 3 bits | 1 bit | 32 bits | 107 bits |

6109 tbl 14

Identification Register Definitions

| INSTRUCTION FIELD | ALL DEVICES | DESCRIPTION | PART NUMBER |
|------------------------------------|------------------|--|------------------------|
| Revision Number (31:29) | 0x0 | Revision Number | |
| Device ID (28:12) | 0x0284 0x0285 | 512Kx36 QDRII Burst of 2 1Mx18 | 71P72604S 71P72804S |
| IDT JEDEC ID CODE (11:1) | 0x033 | Allows unique identification of SRAM vendor. | |
| ID Register Presence Indicator (0) | 1 | Indicates the presence of an ID register. | |

6109 tbl 15

Boundary Scan Exit Order

| ORDER | PIN ID |
|-------|--------|
| 1 | 6R |
| 2 | 6P |
| 3 | 6N |
| 4 | 7P |
| 5 | 7N |
| 6 | 7R |
| 7 | 8R |
| 8 | 8P |
| 9 | 9R |
| 10 | 11P |
| 11 | 10P |
| 12 | 10N |
| 13 | 9P |
| 14 | 10M |
| 15 | 11N |
| 16 | 9M |
| 17 | 9N |
| 18 | 11L |
| 19 | 11M |
| 20 | 9L |
| 21 | 10L |
| 22 | 11K |
| 23 | 10K |
| 24 | 9J |
| 25 | 9K |
| 26 | 10J |
| 27 | 11J |
| 28 | 11H |
| 29 | 10G |
| 30 | 9G |
| 31 | 11F |
| 32 | 11G |
| 33 | 9F |
| 34 | 10F |
| 35 | 11E |
| 36 | 10E |

6109 tbl 16

| ORDER | PIN ID |
|-------|----------|
| 37 | 10D |
| 38 | 9E |
| 39 | 10C |
| 40 | 11D |
| 41 | 9C |
| 42 | 9D |
| 43 | 11B |
| 44 | 11C |
| 45 | 9B |
| 46 | 10B |
| 47 | 11A |
| 48 | Internal |
| 49 | 9A |
| 50 | 8B |
| 51 | 7C |
| 52 | 6C |
| 53 | 8A |
| 54 | 7A |
| 55 | 7B |
| 56 | 6B |
| 57 | 6A |
| 58 | 5B |
| 59 | 5A |
| 60 | 4A |
| 61 | 5C |
| 62 | 4B |
| 63 | 3A |
| 64 | 1H |
| 65 | 1A |
| 66 | 2B |
| 67 | 3B |
| 68 | 1C |
| 69 | 1B |
| 70 | 3D |
| 71 | 3C |
| 72 | 1D |

6109 tbl 17

| ORDER | PIN ID |
|-------|--------|
| 73 | 2C |
| 74 | 3E |
| 75 | 2D |
| 76 | 2E |
| 77 | 1E |
| 78 | 2F |
| 79 | 3F |
| 80 | 1G |
| 81 | 1F |
| 82 | 3G |
| 83 | 2G |
| 84 | 1J |
| 85 | 2J |
| 86 | 3K |
| 87 | 3J |
| 88 | 2K |
| 89 | 1K |
| 90 | 2L |
| 91 | 3L |
| 92 | 1M |
| 93 | 1L |
| 94 | 3N |
| 95 | 3M |
| 96 | 1N |
| 97 | 2M |
| 98 | 3P |
| 99 | 2N |
| 100 | 2P |
| 101 | 1P |
| 102 | 3R |
| 103 | 4R |
| 104 | 4P |
| 105 | 5P |
| 106 | 5N |
| 107 | 5R |

6109 tbl 18

JTAG DC Operating Conditions

| Parameter | Symbol | Min | Typ | Max | Unit | Note |
|--|-----------------|------------|-----|---------|------|------|
| I/O Power Supply | VDDQ | 1.4 | - | VDD | V | |
| Power Supply Voltage | VDD | 1.7 | 1.8 | 1.9 | V | |
| Input High Level | V _{IH} | 1.3 | - | VDD+0.3 | V | |
| Input Low Level | V _{IL} | -0.3 | - | 0.5 | V | |
| TCK Input Leakage Current | I _{IL} | -5 | - | +5 | μA | |
| TMS, TDI Input Leakage Current | I _{IL} | -15 | - | +15 | μA | |
| TDO Output Leakage Current | I _{OL} | -5 | - | +5 | μA | |
| Output High Voltage (I _{OH} = -1mA) | V _{OH} | VDDQ - 0.2 | - | VDDQ | V | 1 |
| Output Low Voltage (I _{OL} = 1mA) | V _{OL} | VSS | - | 0.2 | V | 1 |

NOTE:

6109 tbl 19

1. The output impedance of TDO is set to 50 ohms (nominal process) and does not vary with the external resistor connected to ZQ.

JTAG AC Test Conditions


| Parameter | Symbol | Value | Unit | Note |
|---|-----------------|---------|------|------|
| Input High Level | V _{IH} | 1.8 | V | |
| Input Low Level | V _{IL} | 0 | V | |
| Input Rise/Fall Time | TR/TF | 1.0/1.0 | ns | |
| Input and Output Timing Reference Level | | 0.9 | V | 1 |

NOTE:

6109 tbl 20


1. For SRAM outputs see AC test load on page 11.

JTAG Input Test WaveForm

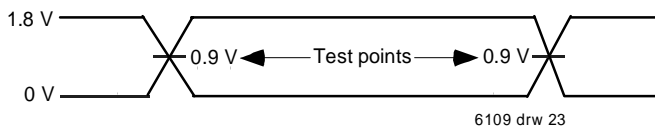


6109 drw 23

JTAG AC Test Load

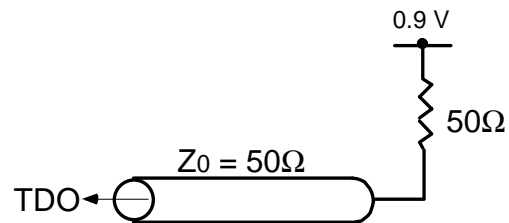

6109 drw 24

JTAG Output Test WaveForm




6109 drw 23a

JTAG AC Characteristics

| Parameter | Symbol | Min | Max | Unit | Note |
|---------------------------|--------|-----|-----|------|------|
| TCK Cycle Time | tCHCH | 50 | - | ns | |
| TCK High Pulse Width | tCHCL | 20 | - | ns | |
| TCK Low Pulse Width | tCLCH | 20 | - | ns | |
| TMS Input Setup Time | tMVCH | 5 | - | ns | |
| TMS Input Hold Time | tCHMX | 5 | - | ns | |
| TDI Input Setup Time | tDVCH | 5 | - | ns | |
| TDI Input Hold Time | tCHDX | 5 | - | ns | |
| SRAM Input Setup Time | tSVCH | 5 | - | ns | |
| SRAM Input Hold Time | tCHSX | 5 | - | ns | |
| Clock Low to Output Valid | tCLOV | 0 | 10 | ns | |



6109 tbl.21

JTAG Timing Diagram

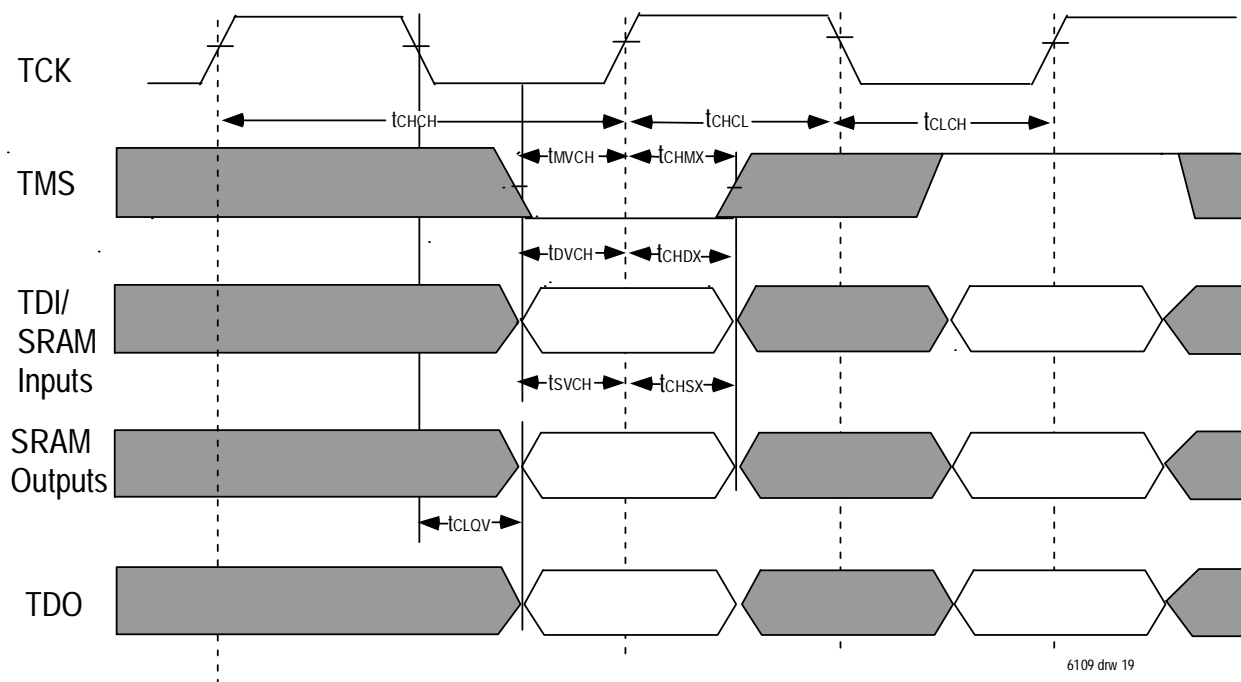


6109 drw 19

Package Diagram Outline for 165-Ball Fine Pitch Grid Array

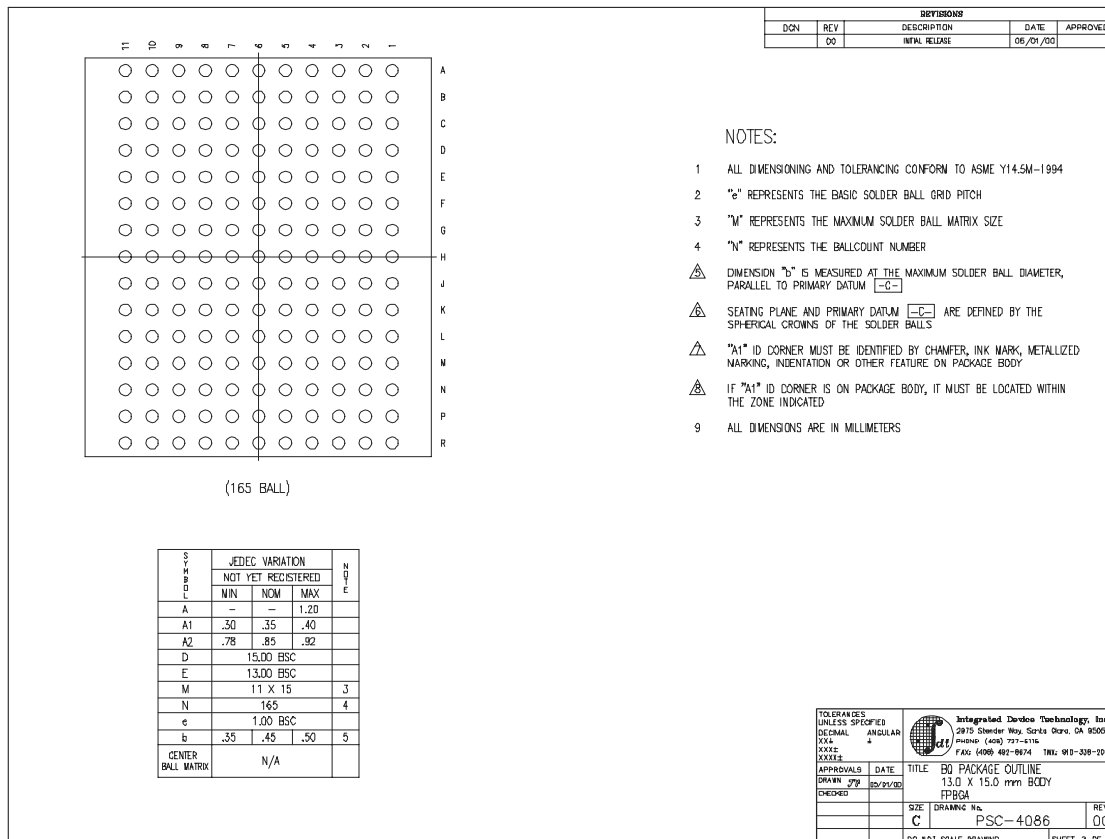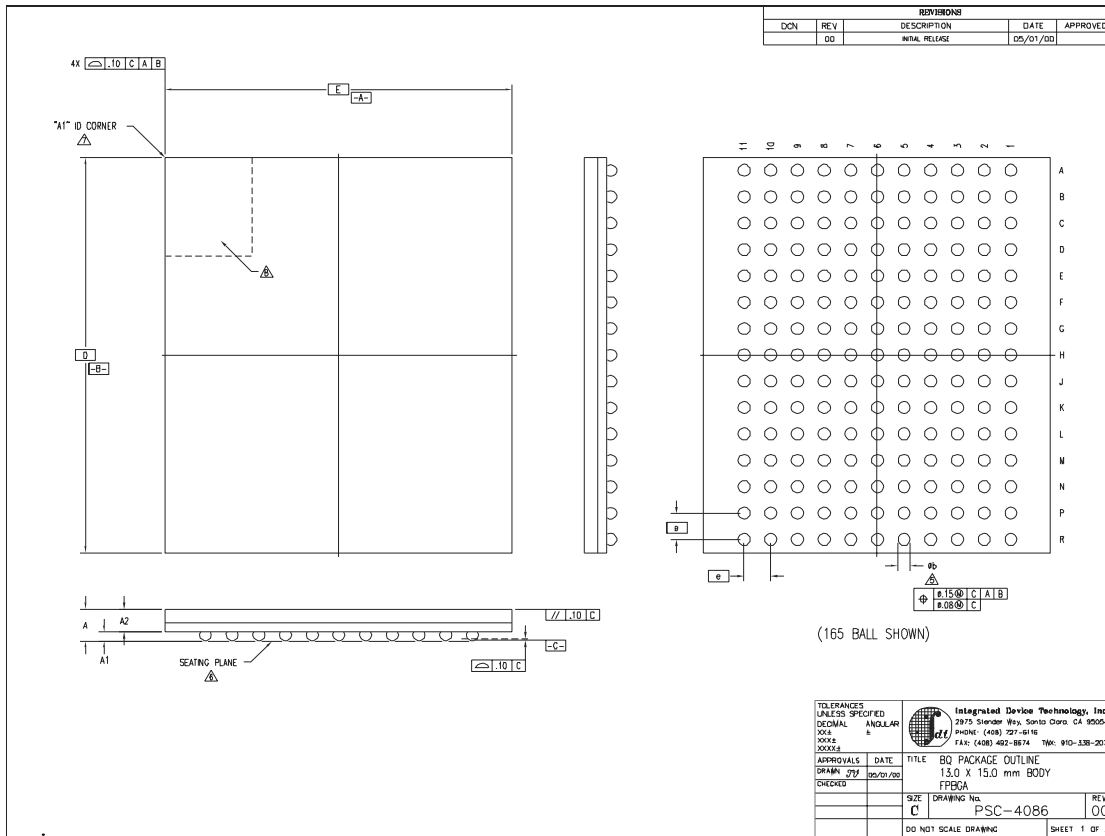

Ordering Information

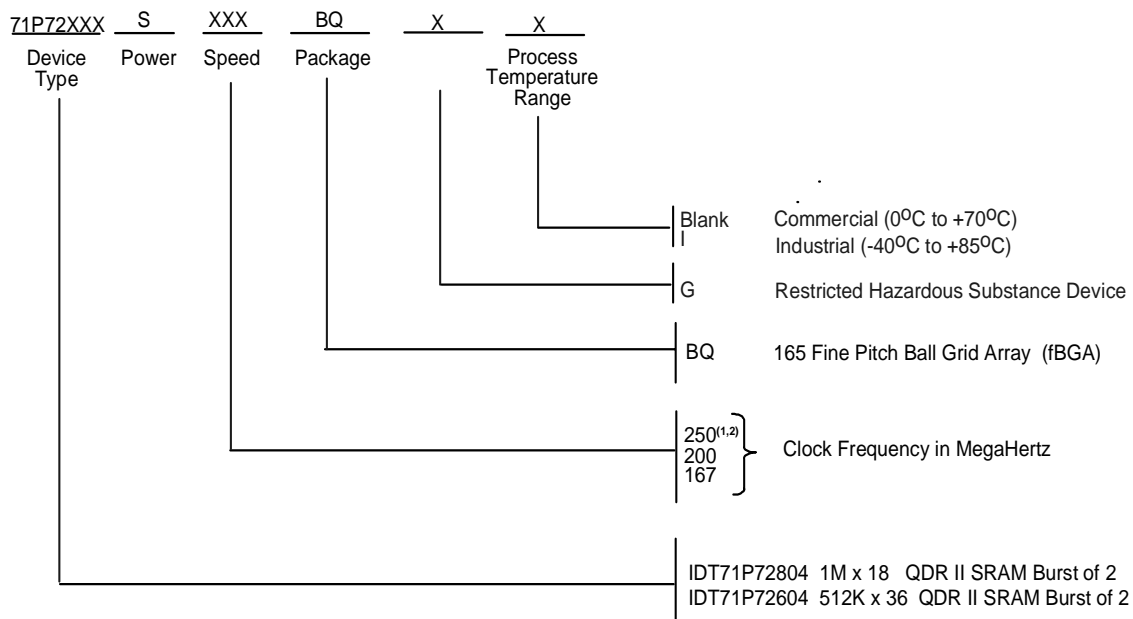

Notes:

- 1) The 250MHz speed grade is not available in the 512K x36-bit option.
- 2) Industrial temperature range is not available for the 250MHz speed grade.

6109 drw 15



CORPORATE HEADQUARTERS
6024 Silver Creek Valley Road
San Jose, CA 95138

for SALES:
800-345-7015 or
408-284-8200
fax: 408-284-2775
www.idt.com

for Tech Support:
sramhelp@idt.com
408-284-4532

*QDR SRAMs and Quad Data Rate RAMs comprise a new family of products developed by Cypress Semiconductor, IDT, and Micron Technology, Inc. *

Revision History

| <u>REVISION</u> | <u>DATE</u> | <u>PAGES</u> | <u>DESCRIPTION</u> |
|-----------------|-------------|-----------------------|--|
| 0 | 07/20/05 | p.1-22 | Released Final datasheet |
| A | 04/21/06 | p.1-3,7-9 12,15,20 | Removed x8 and x9 information from the datasheet. |
| | | p. 7,11,17 | Clarified Max VDDQ equals VDD. |
| | | p.1,7,9,12,20 | Added Industrial temperature to the datasheet. |
| | | p.20 | Added Green to the datasheet "Restricted hazardous substance device" |
| B | 10/13/08 | p.20 | Removed "IDT" from orderable part number |

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View IDT71P72804S167BQ on WIN SOURCE](#)
- ⊖ [IDT, Integrated Device Technology Inc Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management