





**THE DATASHEET OF
AQV225NSX**

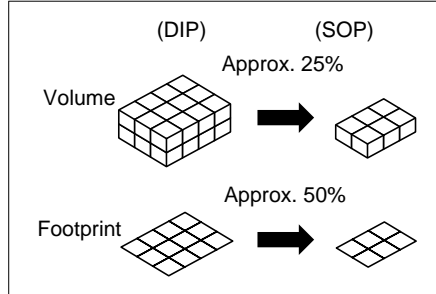

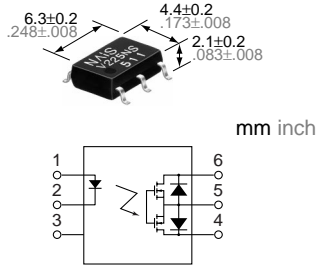

FEATURES

1. 1-channel (Form A) in super miniature design

The device comes in a super-miniature SO package measuring (W) 4.4 × (L) 6.3 × (H) 2.1 mm (W).173 × (L).248 × (H).083 inch —approx. 25% of the volume and 50% of the footprint size of DIP type PhotoMOS Relays.

2. Low capacitance between output terminals ensure high response speed:

The capacitance between output terminals is small, typically 10 pF. This enables for a fast operation speed of 200 μs.

3. Low-level off state leakage current:

The SSR has an off state leakage current of several milliamperes, whereas the Pho-

toMOS relay has only 30 pA even with the rated load voltage of 80 V (AQV225NS).

4. Controls low-level analog signals

PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

5. Tape and reel

The device comes standard in a tape and reel (1,000 pcs./reel) to facilitate automatic insertion machines.

TYPICAL APPLICATIONS

- Telephones
- Measuring instruments
- Computer
- Industrial robots
- High-speed inspection machines

TYPES

1. AC/DC type

| Output rating* | | Part No. | | Packing quantity in tape and reel |
|----------------|--------------|--------------------------------|--------------------------------|-----------------------------------|
| | | Picked from the 1/2/3-pin side | Picked from the 4/5/6-pin side | |
| Load voltage | Load current | 1 Form A | 1 Form A | 1,000 pcs. |
| 80 V | 120 mA | AQV225NSX | AQV225NSZ | |
| 200 V | 50 mA | AQV227NSX | AQV227NSZ | |
| 400 V | 40 mA | AQV224NSX | AQV224NSZ | |

*Indicate the peak AC and DC values.

Notes: (1) Tape package is the standard packing style. Also available in tube. (Part No. suffix "X" or "Z" is not needed when ordering; Tube: 75 pcs.; Case: 1,500 pcs.)

(2) For space reasons, the top two letters of the product number "AQ" are omitted on the product seal. The package type indicator "X" and "Z" are also omitted from the seal. (Ex. the label for product number AQV224NS is V224NS).

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

| Item | | Symbol | Type of connection | AQV225NS | AQV227NS | AQV224NS | Remarks |
|-------------------------|-------------------------|-------------------|--------------------|---------------------------------|----------|----------|---|
| Input | LED forward current | I _F | | 50 mA | | | f = 100 Hz, Duty factor = 0.1% |
| | LED reverse voltage | V _R | | 3 V | | | |
| | Peak forward current | I _{FP} | | 1 A | | | |
| | Power dissipation | P _{in} | | 75 mW | | | |
| Output | Load voltage (peak AC) | V _L | | 80 V | 200 V | 400 V | A connection: Peak AC, DC B, C connection: DC |
| | Continuous load current | I _L | A | 0.12 A | 0.05 A | 0.04 A | |
| | | | B | 0.15 A | 0.06 A | 0.05 A | |
| | | | C | 0.25 A | 0.08 A | 0.06 A | |
| | Peak load current | I _{peak} | | 0.36 A | 0.15 A | 0.12 A | A connection: 100 ms (1 shot), V _L = DC |
| Power dissipation | P _{out} | | 450 mW | | | | |
| Total power dissipation | | P _T | | 500 mW | | | |
| I/O isolation voltage | | V _{iso} | | 1,500 V AC | | | |
| Temperature limits | Operating | T _{opr} | | -40°C to +85°C -40°F to +185°F | | | Non-condensing at low temperatures |
| | Storage | T _{stg} | | -40°C to +100°C -40°F to +212°F | | | |

AQV220NS


2. Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item | | Symbol | Type of connection | AQV225NS | AQV227NS | AQV224NS | Remarks | | |
|----------------------------------|---------------------------|------------------|--------------------|---|----------|----------|---|--|--|
| Input | LED operate current | Typical | I _{Fon} | 0.7 mA | | | I _L = Max. | | |
| | | Maximum | | 3 mA | | | | | |
| | LED turn off current | Minimum | I _{Foff} | 0.4 mA | | | I _L = Max. | | |
| | | Typical | | 0.65 mA | | | | | |
| | LED dropout voltage | Typical | V _F | 1.14 V (1.25 V at I _F = 50 mA) | | | I _F = 5 mA | | |
| | | Maximum | | 1.5 V | | | | | |
| Output | On resistance | Typical | R _{on} | A | 7.0 Ω | 30 Ω | 70 Ω | I _F = 5 mA I _L = Max. Within 1 s on time | |
| | | Maximum | | | 10.0 Ω | 50 Ω | 100 Ω | | |
| | | Typical | R _{on} | B | 3.5 Ω | 16 Ω | 55 Ω | | |
| | | Maximum | | | 5.0 Ω | 25 Ω | 70 Ω | | |
| | | Typical | R _{on} | C | 1.8 Ω | 8 Ω | 28 Ω | | |
| | | Maximum | | | 2.5 Ω | 12.5 Ω | 35 Ω | | |
| | Output capacitance | Typical | C _{out} | 10 pF | | | I _F = 0 V _B = 0 f = 1 MHz | | |
| | | Maximum | | 15 pF | | | | | |
| | Off state leakage current | Typical | I _{leak} | — | 30 pA | 30 pA | 90 pA | I _F = 0 V _L = Max. | |
| | | Maximum | | | 10 nA | | | | |
| | Transfer characteristics | Turn on time* | Typical | T _{on} | — | 0.25 ms | | | I _F = 5 mA I _L = Max. |
| | | | Maximum | | | 0.5 ms | | | |
| Turn off time* | | Typical | T _{off} | — | 0.08 ms | | | I _F = 5 mA I _L = Max. | |
| | | Maximum | | | 0.2 ms | | | | |
| I/O capacitance | | Typical | C _{iso} | — | 0.8 pF | | | f = 1 MHz V _B = 0 | |
| | | Maximum | | | 1.5 pF | | | | |
| Initial I/O isolation resistance | Minimum | R _{iso} | — | 1,000 MΩ | | | 500 V DC | | |

Note: Recommendable LED forward current I_F = 5 mA.

For type of connection, see Page 31.

*Turn on/Turn off time

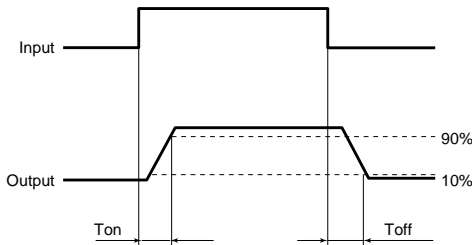


REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

Type of connection: A

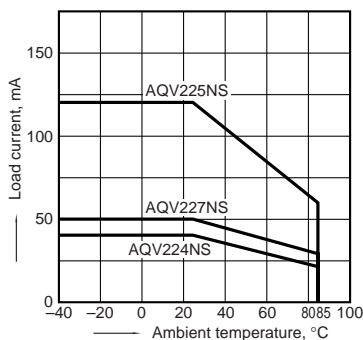


2.-(1) On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 5 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

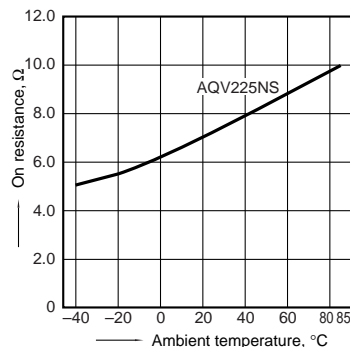


2.-(2) On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 5 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

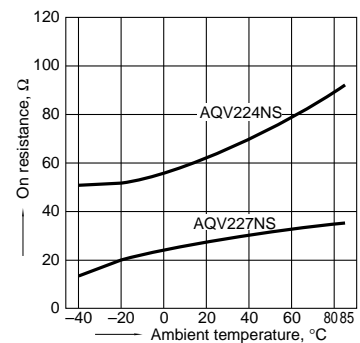


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

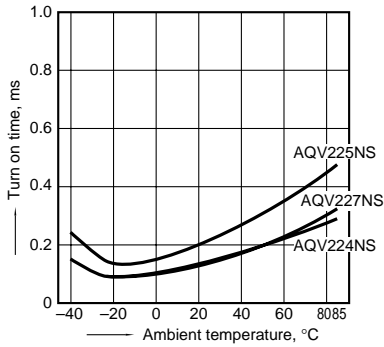


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

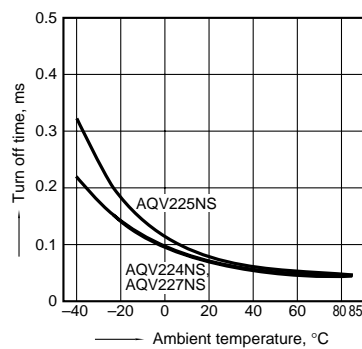


5. LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

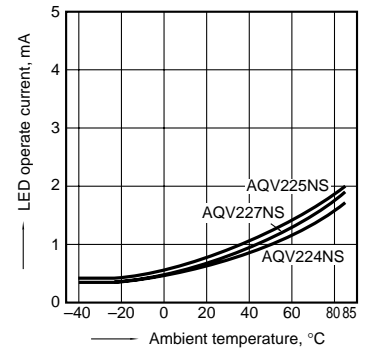


6. LED turn off current vs. ambient temperature characteristics

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

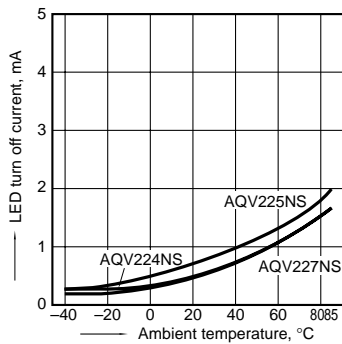


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types;
LED current: 5 to 50 mA

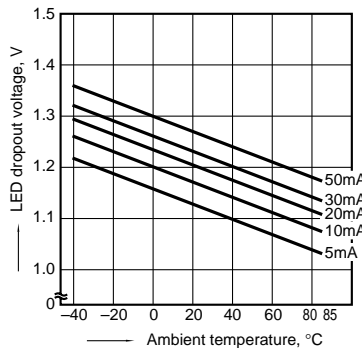


8. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

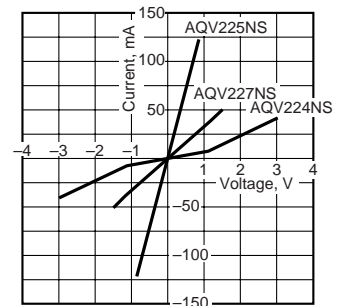


9. Off state leakage current

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

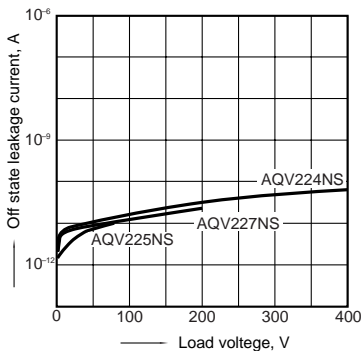


10. LED forward current vs. turn on time characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F

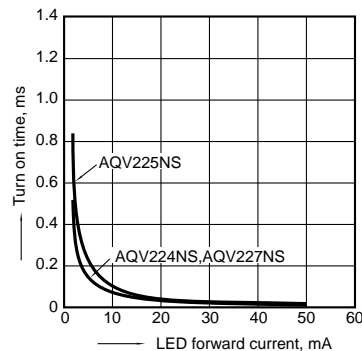


11. LED forward current vs. turn off time characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F

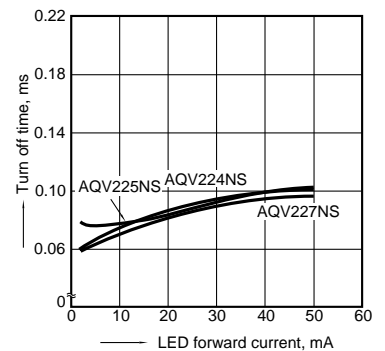


12. Applied voltage vs. output capacitance characteristics

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz, 30 mVrms;
Ambient temperature: 25°C 77°F

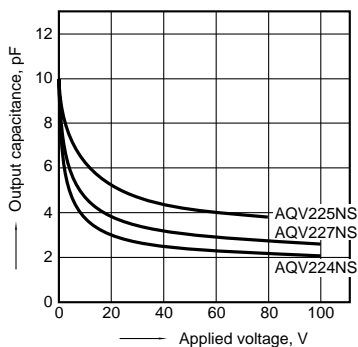


13. Isolation characteristics (50 Ω impedance)

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

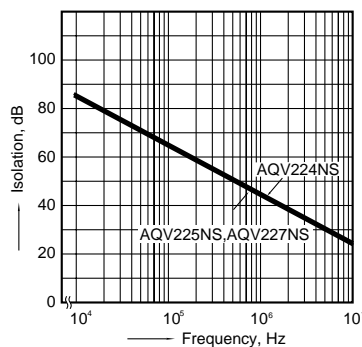

14. Insertion loss characteristics (50 Ω impedance)

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

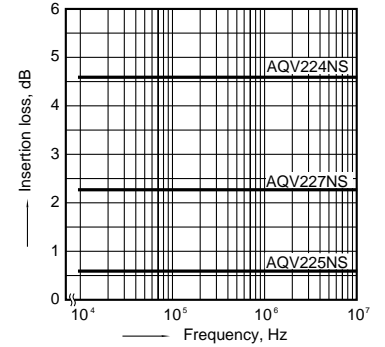

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View AQV225NSX on WIN SOURCE](#)
- ⊖ [Panasonic Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management