



**THE DATASHEET OF
ACPM-9341-TR1**



ACPM-9341-TR2

LTE Band 41/38/xGP MIPI APT PA

2.0 mm × 2.5 mm

Power Amplifier Module

Product Brief



Description

The ACPM-9341 is a fully matched 10-pin surface mount power amplifier module developed for LTE Band 41, Band 38, and xGP, and it meets stringent linearity power up to LTE (MPR=0 dBm) 28.4 dBm. The 2 mm × 2.5 mm form-factor package is self contained, incorporating 50-ohm input and output matching networks.

The ACPM-9341 features CoolPAM circuit technology that supports two power modes—low and high. The CoolPAM is a stage bypass technology that enhances PAE (power added efficiency) at low power range. The stage bypass feature enhances PAE further at low output range, and it enables the power amplifier (PA) to have exceptionally low quiescent current. Without a DC-DC converter, it dramatically saves average current consumption, extends the talk time of mobiles, and prolongs the battery life. It can be used with the APT (average power tracking) operation to reduce the power consumption when VCC1 and VCC2 are connected to a DC-DC converter externally, which adjusts the VCC1 and VCC2 voltage according to the output power level.

The power amplifier is manufactured on an advanced InGaP HBT (hetero-junction bipolar transistor) MMIC (microwave monolithic integrated circuit) technology that offers state-of-the-art reliability, temperature stability, and ruggedness.

Features

- Thin package (0.82 mm typical)
- Excellent linearity in APT mode
- MIPI RFFE interface
- Two-mode power
- Ten-pin surface mounting package
- Internal 50-ohm matching networks for both RF input and output
- Separate drive and output VCC supplies
- Green – Lead-free and RoHS compliant

Applications


- Band 41 TD-LTE
- Band 38 TD-LTE
- xGP

Ordering Information


Part Number	Number of Devices	Container
ACPM-9341-TR2	1,000	178 mm (7 in.) tape/reel

Package Dimensions

The dimensions are in millimeters.

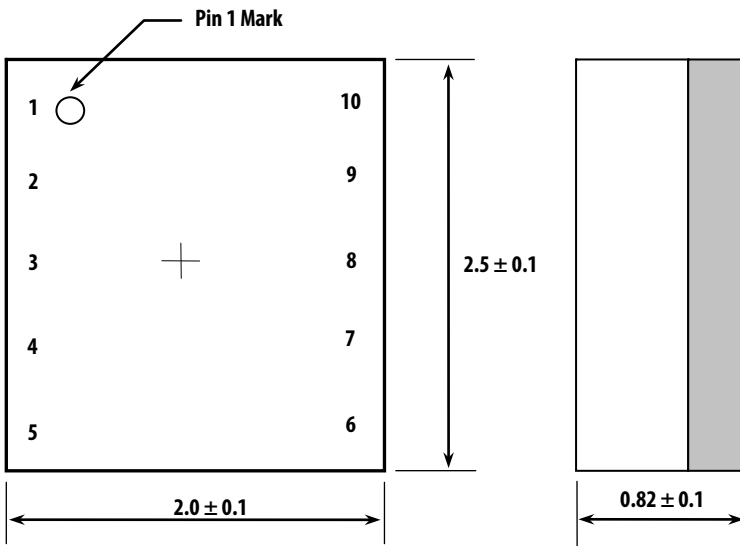

Marking Specification

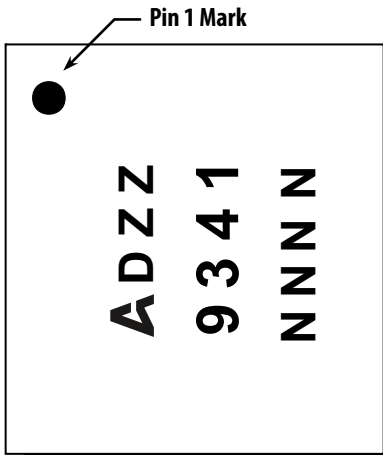

D – Date Code
ZZ – Assembly Lot Identification
9341 – Device Code

Pin Description

Pin #	Name	Description
1	VCC1	DC supply voltage, connect the first RF stage collector to which APT is applied (0.5V~3.5V)
2	RFIN	RF input
3	VBAT	DC supply voltage, connect to the bias circuitry with a fixed voltage (higher than 3.2V)
4	VIO	RFFE enable
5	SDATA	RFFE data
6	SCLK	RFFE clock
7	GND	Ground
8	NC	No connection
9	RFOUT	RF output
10	VCC2	DC supply voltage, connect to the second RF stage collector to which APT is applied (0.5V~3.5V)

For product information and a complete list of distributors, please go to our web site:

www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. All other brand and product names may be trademarks of their respective companies.

Data subject to change. Copyright © 2015 Avago Technologies. All Rights Reserved.


AV02-4856EN – 2015-03-24

AVAGO
TECHNOLOGIES



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View ACPM-9341-TR1 on WIN SOURCE](#)

 [Broadcom Limited Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management