




# THE DATASHEET OF TCN4-22+



# Ceramic Balun RF Transformer

50Ω 1200 to 2200 MHz

## TCN4-22+ TCN4-22



Generic photo used for illustration purposes only

CASE STYLE: FV1206-1

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

**Available Tape and Reel at no extra cost**

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 3000

### Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C


Input RF Power\*\* 5W

\*\*From 85°C derate linearly to 2.5W at 100°C  
Permanent damage may occur if any of these limits are exceeded.


### Pin Connections

PRIMARY DOT	2
PRIMARY(GND)	1,3
SECONDARY DOT	4
SECONDARY	6
GROUND	5

### Outline Drawing

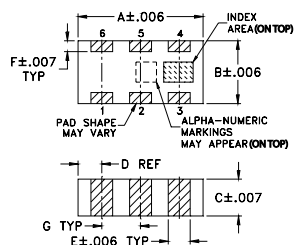

### PCB Land Pattern




Suggested Layout,  
Tolerance to be within ±.002

### Outline Dimensions (inch)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K	wt	
.039	.024	.042	.123	grams	
0.99	0.61	1.07	3.12	.020	

### Demo Board MCL P/N: TB-298 Suggested PCB Layout (PL-162)

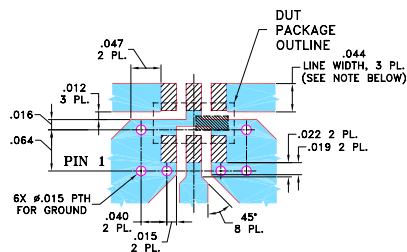

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350 WITH DIELECTRIC THICKNESS .020 ± .0015. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- wideband, 1200 to 2200 MHz
- low phase unbalance
- miniature size, 0.12"x.06"x.037"
- LTCC construction
- low cost
- aqueous washable

### Applications

- GSM
- CDMA
- GPS
- DECT
- PCN
- PCS
- ISM

### Electrical Specifications (T<sub>AMB</sub>=25°C)

Ω RATIO (Secondary/Primary)	FREQUENCY (MHz)	INSERTION* LOSS (dB)	PHASE UNBALANCE † (Deg.) Typ.	AMPLITUDE UNBALANCE (dB) Typ.
4	1200-2200	1.0	10	0.6


\* Insertion Loss is referenced to mid-band loss, 0.9 dB

† Relative to 180°


### Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
1200.00	0.55	12.54	0.38	13.12
1300.00	0.64	13.68	0.25	13.07
1400.00	0.73	14.80	0.04	12.32
1500.00	0.81	15.52	0.16	10.86
1600.00	0.90	15.33	0.26	8.60
1700.00	1.00	14.39	0.33	5.70
1800.00	1.10	13.02	0.36	2.10
1900.00	1.23	11.67	0.40	1.87
2000.00	1.35	10.47	0.38	6.35
2100.00	1.47	9.46	0.33	10.89
2200.00	1.55	8.60	0.20	15.55


### INSERTION LOSS

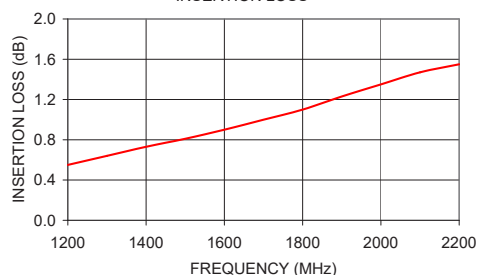


### AMPLITUDE UNBALANCE

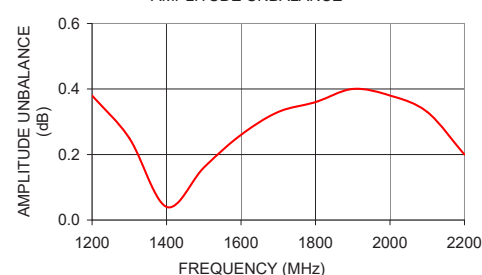

### PHASE UNBALANCE

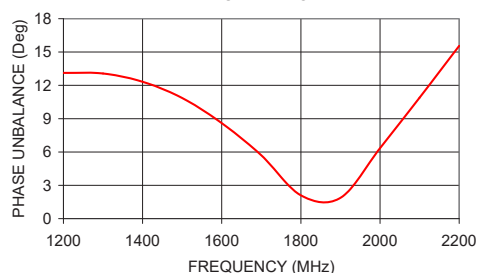

### configuration J

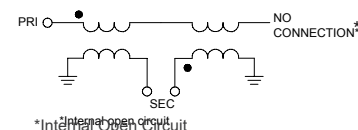

\*Internal Open Circuit


**Mini-Circuits®**

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. D  
M151107  
TCN4-22  
ED-11659/1  
AD/RS/CP/AM  
151008

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View TCN4-22+ on WIN SOURCE](#)

 [Mini-Circuits Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management