




THE DATASHEET OF TCN4-162+



Ceramic Balun RF Transformer

50Ω 720 to 1600 MHz

TCN4-162+



Generic photo used for illustration purposes only
CASE STYLE: FV1206-1

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Input RF Power***	3W



***Derate linearly to 2.5W at 100°C
Permanent damage may occur if any of these limits are exceeded.

Pad Connections

PRIMARY DOT (Unbalanced Port)	5
PRIMARY (GND)	4,6
SECONDARY DOT (Balanced)	3
SECONDARY (Balanced)	1
NO CONNECTION	2

Pads 1,3,4,6 are DC-connected internally

Outline Drawing




Suggested Layout, Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K	wt	
.039	.024	.042	.123	grams	
0.99	0.61	1.07	3.12	.020	

Demo Board MCL P/N: TB-417+ Suggested PCB Layout (PL-265)

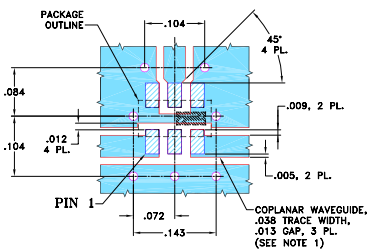

- NOTES:
1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- wideband, 720 to 1600 MHz
- low phase unbalance, 2 deg. typ. and amplitude unbalance, 0.3 dB typ.
- miniature size, 0.12"x.06"x.037"
- LTCC construction
- low cost
- aqueous washable

Applications

- GSM
- WCDMA
- GPS
- ISM

Electrical Specifications (T_{AMB}=25°C)

Ω RATIO (Secondary/Primary)	FREQUENCY (MHz)	INSERTION* LOSS (dB)	PHASE UNBALANCE† (Deg.) Typ.	AMPLITUDE UNBALANCE (dB) Typ.
4	720-1600	1.0	2.0	0.4





* Insertion Loss is referenced to mid-band loss, 0.7 dB. Reference Demo Board TB-417+

† Relative to 180°

Typical Performance Data at 25°C**

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
720.00	0.60	10.28	0.47	1.21
900.00	0.00	25.18	0.08	2.81
1000.00	0.04	19.64	0.04	3.39
1100.00	0.12	16.88	0.12	3.44
1200.00	0.17	16.38	0.16	3.09
1300.00	0.21	17.28	0.16	2.31
1400.00	0.24	19.25	0.13	1.33
1500.00	0.29	21.00	0.00	0.19
1600.00	0.40	19.65	0.29	1.10

** Measured with Agilent E5071B network analyzer using impedance conversion and port extension.

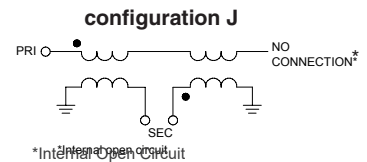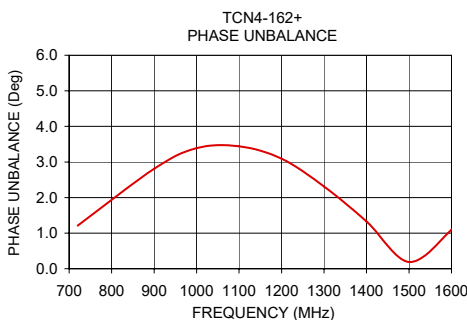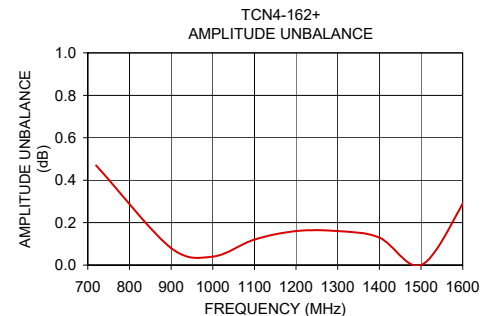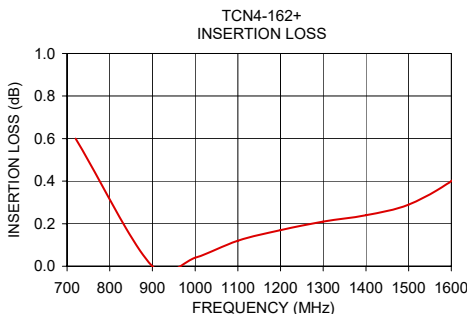

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View TCN4-162+ on WIN SOURCE](#)

 [Mini-Circuits Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management