



**THE DATASHEET OF  
SIDC07D60E6X1SA1**




## Fast switching diode chip in EMCON-Technology

### FEATURES:

- 600V EMCON technology 70  $\mu\text{m}$  chip
- soft , fast switching
- low reverse recovery charge
- small temperature coefficient

### This chip technology is used for:

- EUPEC power modules and discrete devices



### Applications:

- SMPS, resonant applications, drives

Chip Type	$V_R$	$I_F$	Die Size	Package	Ordering Code
SIDC07D60E6	600V	15A	2.65 x 2.65 mm <sup>2</sup>	sawn on foil	Q67050-A4005-A001

### MECHANICAL PARAMETER:

Raster size	2.65 x 2.65	mm <sup>2</sup>
Area total / active	7.02 / 5.01	
Anode pad size	2.17 x 2.17	
Thickness	70	$\mu\text{m}$
Wafer size	150	mm
Flat position	180	deg
Max. possible chips per wafer	2156 pcs	
Passivation frontside	Photoimide	
Anode metallisation	3200 nm AlSiCu	
Cathode metallisation	1400 nm Ni Ag –system suitable for epoxy and soft solder die bonding	
Die bond	electrically conductive glue or solder	
Wire bond	Al, $\leq 500\mu\text{m}$	
Reject Ink Dot Size	$\varnothing$ 0.65mm ; max 1.2mm	
Recommended Storage Environment	store in original container, in dry nitrogen, < 6 month at an ambient temperature of 23°C	

## Maximum Ratings

Parameter	Symbol	Condition	Value	Unit
Repetitive peak reverse voltage	$V_{RRM}$		600	V
Continuous forward current limited by $T_{jmax}$	$I_F$		15	A
Single pulse forward current (depending on wire bond configuration)	$I_{FSM}$	$t_p = 10\text{ ms sinusoidal}$	tbd	
Maximum repetitive forward current limited by $T_{jmax}$	$I_{FRM}$		45	
Operating junction and storage temperature	$T_j, T_{stg}$		-55...+150	°C

## Static Electrical Characteristics (tested on chip), $T_j=25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Conditions		Value			Unit
				min.	typ.	max.	
Reverse leakage current	$I_R$	$V_R=600V$	$T_j=25\text{ °C}$			27	µA
Cathode-Anode breakdown Voltage	$V_{Br}$	$I_R=3mA$	$T_j=25\text{ °C}$	600			V
Forward voltage drop	$V_F$	$I_F=15A$	$T_j=25\text{ °C}$		1.25		V


## Dynamic Electrical Characteristics, at $T_j = 25\text{ °C}$ , unless otherwise specified, tested at component

Parameter	Symbol	Conditions		Value			Unit
				min.	typ.	max.	
Reverse recovery time	$t_{rr1}$	$I_F=15A$	$T_j = 25\text{ °C}$		tbd		ns
	$t_{rr2}$	$di/dt=600A/ms$ $V_R=300V$	$T_j = 125\text{ °C}$				
Peak recovery current	$I_{RRM1}$	$I_F=15A$	$T_j = 25\text{ °C}$		18.5		A
	$I_{RRM2}$	$di/dt=600A/ms$ $V_R= 300V$	$T_j = 125\text{ °C}$		21.6		
Reverse recovery charge	$Q_{rr1}$	$I_F=15A$	$T_j=25\text{ °C}$		1.4		µC
	$Q_{rr2}$	$di/dt=600A/ms$ $V_R= 300V$	$T_j=125\text{ °C}$		2.2		
Peak rate of fall of reverse recovery current	$di_{rr1}/dt$	$I_F=15A$	$T_j = 25\text{ °C}$		tbd		A/µs
	$di_{rr2}/dt$	$di/dt=600A/ms$ $V_R= 300V$	$T_j=125\text{ °C}$				
Softness	S1	$I_F=15A$	$T_j=25\text{ °C}$		tbd		1
	S2	$di/dt=600A/ms$ $V_R= 300V$	$T_j=125\text{ °C}$				

# SIDC07D60E6

CHIP  
DRAWING:

Die-Size 2650 um x 2650 um  
active area: 5 mm<sup>2</sup>

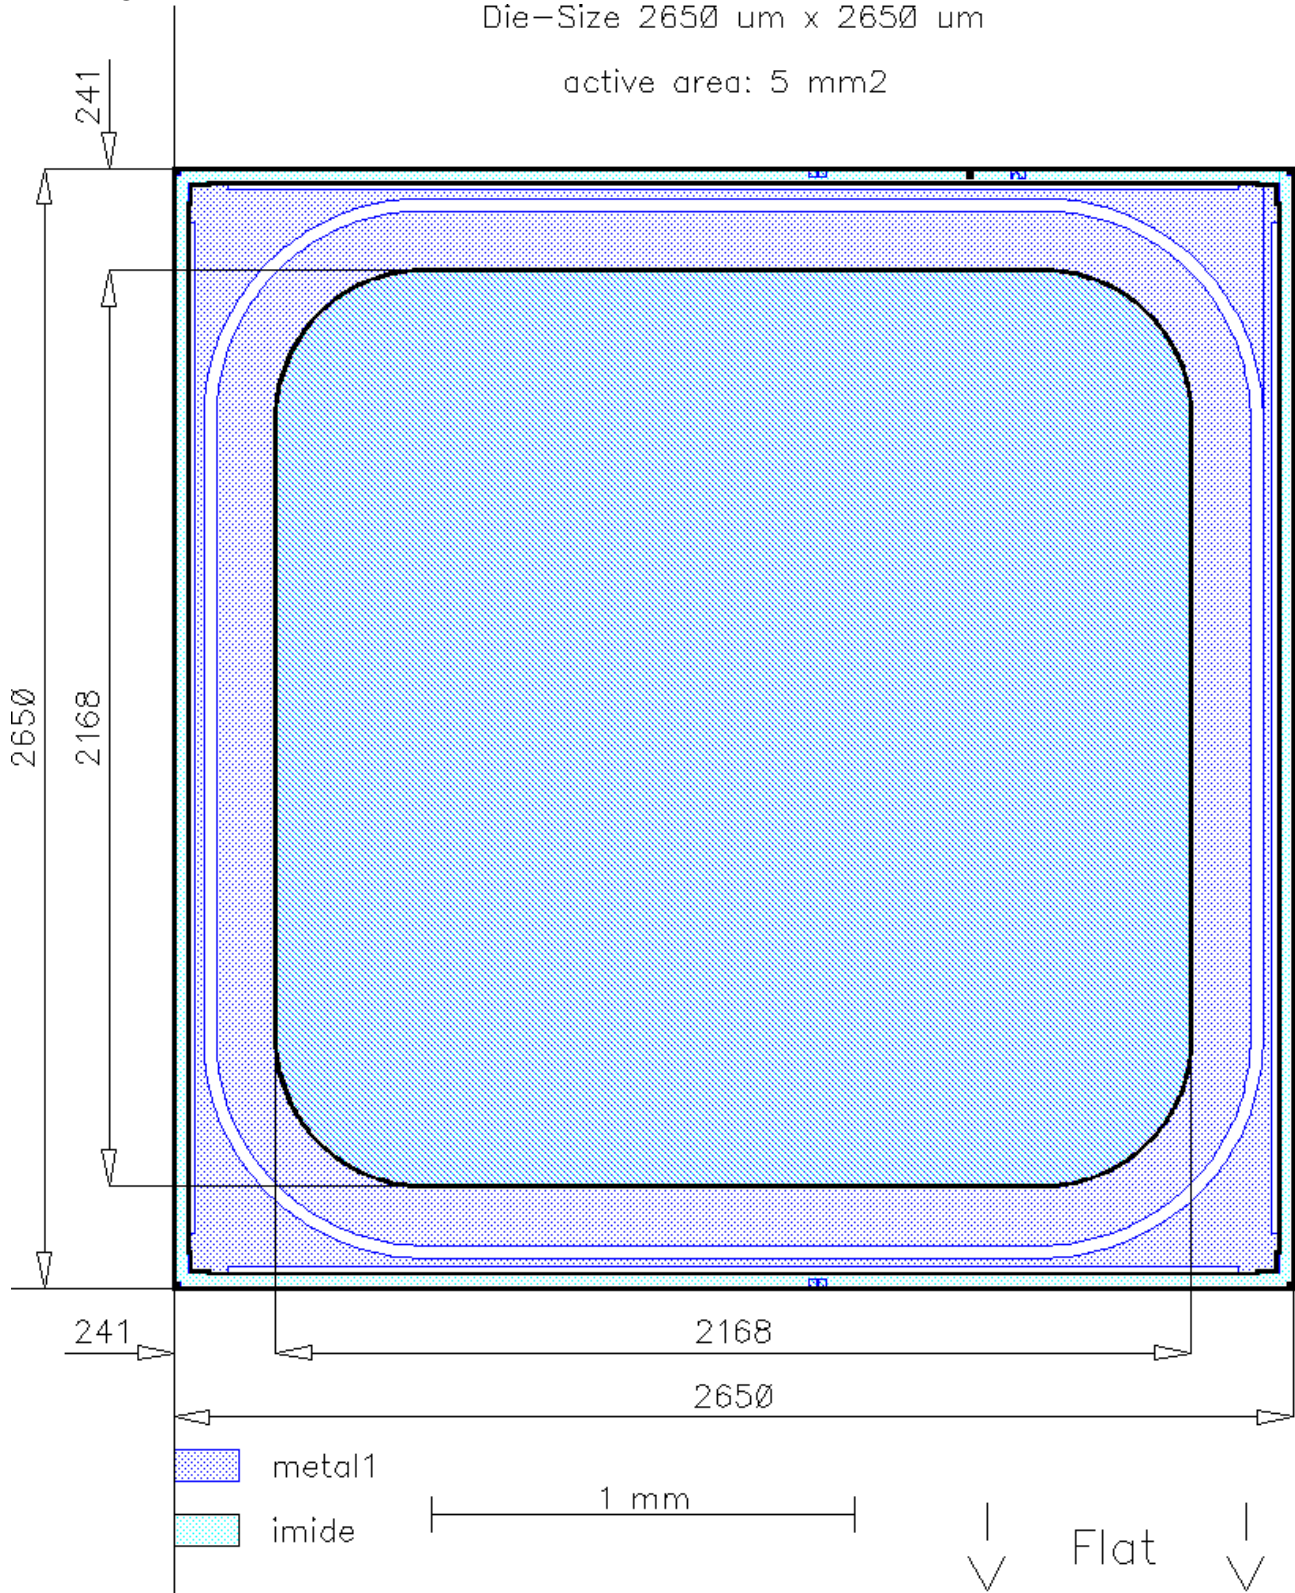



Preliminary

SIDC07D60E6

---

**FURTHER ELECTRICAL CHARACTERISTICS:**

---

This chip data sheet refers to the device data sheet

INFINEON TECHNOLOGIES /  
EUPEC

tbd

---

**Description:**

---

AQL 0,65 for visual inspection according to failure catalog

---

Electrostatic Discharge Sensitive Device according to MIL-STD 883

---

Test-Normen Villach/Prüffeld

---

**Published by**  
**Infineon Technologies AG**  
**Bereich Kommunikation**  
**St.-Martin-Strasse 53**  
**D-81541 München**  
**© Infineon Technologies AG 2000**  
**All Rights Reserved.**

**Attention please!**

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

**Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives world-wide (see address list).

**Warnings**

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and / or maintain and sustain and / or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View SIDC07D60E6X1SA1 on WIN SOURCE](#)
- ⊖ [Infineon Technologies Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management