




**THE DATASHEET OF
M80-5704205**



Datamate J-Tek Connectors

Female Crimp Kit - Reverse Fix

- ❖ Allows for further flexibility in system design.
- ❖ Crimp contacts supplied loose and are inserted from rear.
- ❖ Part numbers are for a complete kit of a housing and the applicable number of contacts.
- ❖ Jackscrews are assembled.
- ❖ Mates with male Datamate J-Tek connectors with compatible Reverse Fix jackscrews.

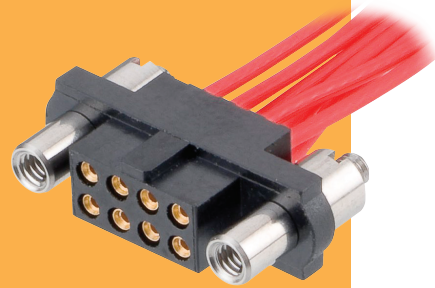

WITH JACKSCREWS	CALCULATION	WIRE STRIPPING DETAILS																										
<p>No. 1 contact</p> <p>Board Mount Jackscrew</p>	<table border="1"> <tr> <td>A</td> <td>$B + 12$</td> </tr> <tr> <td>B</td> <td>Total no. of contacts - 2</td> </tr> <tr> <td>C</td> <td>$B + 7$</td> </tr> </table>	A	$B + 12$	B	Total no. of contacts - 2	C	$B + 7$																					
	A	$B + 12$																										
	B	Total no. of contacts - 2																										
C	$B + 7$																											
<p>Board Mount Nut, 2 per connector</p>	<table border="1"> <tr> <th colspan="2" style="background-color: #f4a460;">TOOLS</th> </tr> <tr> <td colspan="2"> <p>Recommended Crimp Tool - M22520/2-01</p> <p>Positioner - T5747</p> <p>Contact Insertion/Removal Tool - Z80-280</p> <ul style="list-style-type: none"> ❖ Spare and pre-cabled contacts shown on following pages. ❖ Instruction sheets available at www.harwin.com/instructions. </td> </tr> </table>	TOOLS		<p>Recommended Crimp Tool - M22520/2-01</p> <p>Positioner - T5747</p> <p>Contact Insertion/Removal Tool - Z80-280</p> <ul style="list-style-type: none"> ❖ Spare and pre-cabled contacts shown on following pages. ❖ Instruction sheets available at www.harwin.com/instructions. 																								
TOOLS																												
<p>Recommended Crimp Tool - M22520/2-01</p> <p>Positioner - T5747</p> <p>Contact Insertion/Removal Tool - Z80-280</p> <ul style="list-style-type: none"> ❖ Spare and pre-cabled contacts shown on following pages. ❖ Instruction sheets available at www.harwin.com/instructions. 																												
HOW TO ORDER																												
<table border="1"> <tr> <td style="background-color: #f4a460;">SERIES CODE</td> <td style="text-align: center;">M80 - 4XX XX XX</td> </tr> <tr> <td style="background-color: #f4a460;">TYPE</td> <td> <table border="1"> <tr> <td>462</td> <td>Large Bore (22 AWG)</td> </tr> <tr> <td>463</td> <td>Small Bore (24-28 AWG)</td> </tr> </table> </td> </tr> <tr> <td style="background-color: #f4a460;">TOTAL NO. OF CONTACTS</td> <td style="text-align: center;">04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</td> </tr> <tr> <td style="background-color: #f4a460;">FINISH</td> <td> <table border="1"> <tr> <td>05</td> <td>Gold</td> </tr> <tr> <td>42</td> <td>Gold + Tin</td> </tr> </table> </td> </tr> <tr> <td colspan="2" style="text-align: center;">3.5mm Board Mount Jackscrews only</td> </tr> </table>			SERIES CODE	M80 - 4XX XX XX	TYPE	<table border="1"> <tr> <td>462</td> <td>Large Bore (22 AWG)</td> </tr> <tr> <td>463</td> <td>Small Bore (24-28 AWG)</td> </tr> </table>	462	Large Bore (22 AWG)	463	Small Bore (24-28 AWG)	TOTAL NO. OF CONTACTS	04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50	FINISH	<table border="1"> <tr> <td>05</td> <td>Gold</td> </tr> <tr> <td>42</td> <td>Gold + Tin</td> </tr> </table>	05	Gold	42	Gold + Tin	3.5mm Board Mount Jackscrews only									
SERIES CODE	M80 - 4XX XX XX																											
TYPE	<table border="1"> <tr> <td>462</td> <td>Large Bore (22 AWG)</td> </tr> <tr> <td>463</td> <td>Small Bore (24-28 AWG)</td> </tr> </table>	462	Large Bore (22 AWG)	463	Small Bore (24-28 AWG)																							
462	Large Bore (22 AWG)																											
463	Small Bore (24-28 AWG)																											
TOTAL NO. OF CONTACTS	04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50																											
FINISH	<table border="1"> <tr> <td>05</td> <td>Gold</td> </tr> <tr> <td>42</td> <td>Gold + Tin</td> </tr> </table>	05	Gold	42	Gold + Tin																							
05	Gold																											
42	Gold + Tin																											
3.5mm Board Mount Jackscrews only																												
<table border="1"> <tr> <td style="background-color: #f4a460;">SERIES CODE</td> <td style="text-align: center;">M80 - 4 X1 XX XX FX</td> </tr> <tr> <td style="background-color: #f4a460;">TYPE</td> <td> <table border="1"> <tr> <td>C1</td> <td>Small Bore (24-28 AWG)</td> </tr> <tr> <td>D1</td> <td>Large Bore (22 AWG)</td> </tr> <tr> <td>E1</td> <td>Extra Small Bore (28-32 AWG)</td> </tr> </table> </td> </tr> <tr> <td style="background-color: #f4a460;">TOTAL NO. OF CONTACTS</td> <td style="text-align: center;">04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</td> </tr> <tr> <td style="background-color: #f4a460;">FINISH</td> <td> <table border="1"> <tr> <td>05</td> <td>Gold</td> </tr> <tr> <td>42</td> <td>Gold + Tin</td> </tr> </table> </td> </tr> <tr> <td></td> <td> <table border="1"> <tr> <th colspan="2" style="background-color: #f4a460;">JACKSCREW</th> </tr> <tr> <td>F8</td> <td>3.5mm Board Mount</td> </tr> <tr> <td>F9</td> <td>5mm Board Mount</td> </tr> </table> </td> </tr> </table>			SERIES CODE	M80 - 4 X1 XX XX FX	TYPE	<table border="1"> <tr> <td>C1</td> <td>Small Bore (24-28 AWG)</td> </tr> <tr> <td>D1</td> <td>Large Bore (22 AWG)</td> </tr> <tr> <td>E1</td> <td>Extra Small Bore (28-32 AWG)</td> </tr> </table>	C1	Small Bore (24-28 AWG)	D1	Large Bore (22 AWG)	E1	Extra Small Bore (28-32 AWG)	TOTAL NO. OF CONTACTS	04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50	FINISH	<table border="1"> <tr> <td>05</td> <td>Gold</td> </tr> <tr> <td>42</td> <td>Gold + Tin</td> </tr> </table>	05	Gold	42	Gold + Tin		<table border="1"> <tr> <th colspan="2" style="background-color: #f4a460;">JACKSCREW</th> </tr> <tr> <td>F8</td> <td>3.5mm Board Mount</td> </tr> <tr> <td>F9</td> <td>5mm Board Mount</td> </tr> </table>	JACKSCREW		F8	3.5mm Board Mount	F9	5mm Board Mount
SERIES CODE	M80 - 4 X1 XX XX FX																											
TYPE	<table border="1"> <tr> <td>C1</td> <td>Small Bore (24-28 AWG)</td> </tr> <tr> <td>D1</td> <td>Large Bore (22 AWG)</td> </tr> <tr> <td>E1</td> <td>Extra Small Bore (28-32 AWG)</td> </tr> </table>	C1	Small Bore (24-28 AWG)	D1	Large Bore (22 AWG)	E1	Extra Small Bore (28-32 AWG)																					
C1	Small Bore (24-28 AWG)																											
D1	Large Bore (22 AWG)																											
E1	Extra Small Bore (28-32 AWG)																											
TOTAL NO. OF CONTACTS	04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50																											
FINISH	<table border="1"> <tr> <td>05</td> <td>Gold</td> </tr> <tr> <td>42</td> <td>Gold + Tin</td> </tr> </table>	05	Gold	42	Gold + Tin																							
05	Gold																											
42	Gold + Tin																											
	<table border="1"> <tr> <th colspan="2" style="background-color: #f4a460;">JACKSCREW</th> </tr> <tr> <td>F8</td> <td>3.5mm Board Mount</td> </tr> <tr> <td>F9</td> <td>5mm Board Mount</td> </tr> </table>	JACKSCREW		F8	3.5mm Board Mount	F9	5mm Board Mount																					
JACKSCREW																												
F8	3.5mm Board Mount																											
F9	5mm Board Mount																											

All dimensions in mm.


Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View M80-5704205 on WIN SOURCE](#)

 [Harwin Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management