



**THE DATASHEET OF  
DS1200DC-3-002**



## DS1200DC

1200 Watt Distributed Power System

### Data Sheet

#### Front-end Bulk Power

#### Total Output Power:

180 to 264 Vac: 1200 W

3.3 Vdc or 5.0 Vdc Standby Output

#### Telco Input Range:

-40 to -72 Vdc



### SPECIAL FEATURES

- GR-1089-CORE Issue 4 compliant
- 1U X 2U form factor
- 21.71 W / in<sup>3</sup>
- +12 Vdc Output
- +3.3 Vdc standby (5 V standby option)
- No minimum load required
- Hot plug operation
- N + 1 redundant
- Internal OR'ing fets
- Active current sharing shares with DS1200 AC unit (10 - 100% load)
- Built-in cooling fan (40 mm x 28 mm)
- I<sup>2</sup>C communication interface bus
- PMBus compliant
- EERPOM for FRU data
- Red/green bi-color LED status
- Internal fan speed control
- Fan Fail Tach Output Signal
- INTEL, SSI Std. logic timing
- INTEL, SSI Std. FRU data format
- Full digital control
- Two year warranty
- NEBS compliant

### SAFETY

- UL/cUL 60950 (UL Recognized)
- NEMKO+ CB Report EN60950
- EN60950
- CE Mark
- China CCC

### Electrical Specifications

Input	
Input range	-40 Vdc to -72 Vdc
Inrush current	ETSI EN300 132-2 part 4.7 compliant
Efficiency	> 85% typical at high line 50% load
Conducted EMI	Per GR-1089-CORE Issue 4
Radiated EMI	Per GR-1089-CORE Issue 4
Leakage current	1.40 mA @ 240 Vac
Hold-up time	1.1 ms
Output	
Main DC voltage	+12 V @ 100 A
Standby	+3.3 Vsb @ 6 A (5 V @ 4 A available)
Adjustment range	±5% on +12 V only using I <sup>2</sup> C
Regulation	+12 Vdc; ±5% +3.3 or 5.0 Vsb ±5%
Overcurrent	+12 Vdc; latches off if overcurrent lasts over 1 second, otherwise it is auto recovery (See Table 1 next page) +3.3 Vsb, 9 A max (hiccup mode)
Overvoltage	+12 Vdc; 13.2 - 14.4 Vdc +3.3 Vsb; 3.76 - 4.30 Vdc
Undervoltage	+12 Vdc; 9 - 10.8 V (latch off)
Turn-on delay	2 second max, 5 - 50 mS, monotonic rise
Main output rise time	5 - 50 mS, monotonic rise

## Logic Control

PS_SEATED (A4)	TTL logic LOW if power supply is seated into system connector. This is a short pin. A logic HIGH if the PSU is removed
PWR_GOOD (C3)	Active TTL high when output is within regulation limits.
AC_OK (B1)	A low logic level if the input voltage is within allowable limits. A TTL logic HIGH level, and a 5 mS early warning signal before 12.0 V DC output loss of regulation.
PS_INHIBIT/PS_KILL (B4)	When left open power supply operation will be inhibited. When the power supply is inserted into the system, this pin will be pull low by the system and turn the power supply on only after all other power supply pins have seated.
PS_ON (A1)	The output will be enabled when this signal is pulled low, below 0.8 V outputs disabled when pin is driven high or left open.

## Environmental Specifications

<b>Operating temperature</b>	-10 to 55 °C
<b>Storage temperature</b>	-40 to +85 °C
<b>Altitude, operating</b>	13,000 feet
<b>Electromagnetic susceptibility / Input transients</b>	GR-1089-CORE Issue 4
<b>RoHS &amp; lead free</b>	Compliant
<b>Humidity</b>	20 - 90% RH, non condensing
<b>Shock and vibration specifications</b>	Complies with Artesyn standard specifications plus additional NEBS requirement
<b>MTBF (demonstrated)</b>	500 K Hrs at full load, 40 °C


## Ordering Information

Model Number*	Nominal Output Voltage Set Point	Set Point Tolerance	Total Regulation	Current		Output Ripple P/P	Overcurrent	Standby	Air Flow
				Min	Max				
DS1200DC-3	12.0 V	±0.2%	±0.5%	0 A	100 A	120 mV	118 A - 147.6 A*	3.3 V @ 6 A	STD
DS1200DC-3-001	12.0 V	±0.2%	±0.5%	0 A	100 A	120 mV	118 A - 147.6 A*	3.3 V @ 6 A	REV**
DS1200DC-3-002	12.0 V	±0.2%	±0.5%	0 A	100 A	120 mV	118 A - 147.6 A*	5.0 V @ 4 A	STD
DS1200DC-3-004	12.0 V	±0.2%	±0.5%	0 A	100 A	120 mV	118 A - 147.6 A*	5.0 V @ 4 A	REV**

\* Over current latches off if overcurrent lasts over 1 seconds, otherwise it is auto recovery.

\*\* Derating may apply.

## Mechanical Drawing

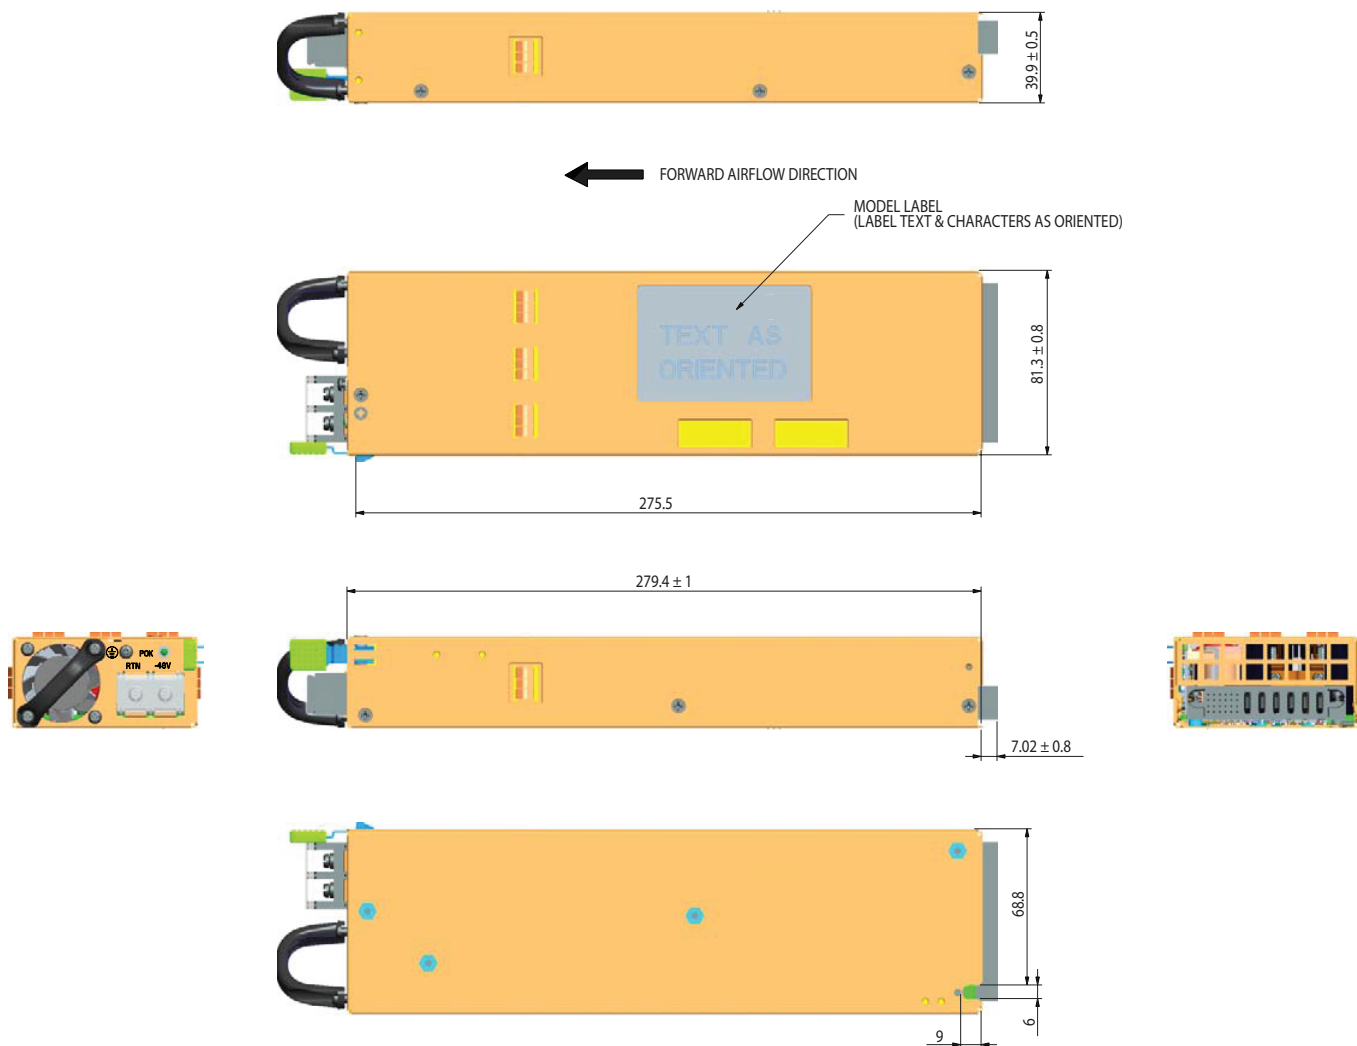

Conditon	LED Status
Stand-by - ON; Main output - OFF; AC PRESENT	Blinking green
Stand-by - ON; Main output - ON	Solid green
Main output OCP, UVP, OVP	Blinking Amber
FAN_FAULT; OTP; Stand-by OCP/UVP	Amber

## Mechanical Specifications

### DC Output Connector Pinout Assignment

Male connector as viewed from the rear of the supply:

D1	D2	D3	D4	D5	D6	PB1	PB2	PB3	PB4	PB5	PB6
C1	C2	C3	C4	C5	C6						
B1	B2	B3	B4	B5	B6						
A1	A2	A3	A4	A5	A6						

### Power Supply Side

1. FCI Power Blade 51721 series  
51721-10002406AA

2. Molex Power Connector  
SD-87667 series  
87667-7002

### Mating Connector (System Side)

1. FCI Power Blade  
51741-10002406CC  
Straight Pins

2. FCI Power Blade  
51761-10002406AALF  
Right Angle

### Pin Assignments

Pin	Signal Name
PB1	Main output return
PB2	Main output return
PB3	Main output return
PB4	+ Main output
PB5	+ Main output
PB6	+ Main output
A1	PS_ON_
A2	Main output remote sense return
A3	Spare
A4	PS_SEATED (Power supply seated)
A5	STANDBY
A6	STANDBY RETURN
B1	AC_OK (AC Input Present)
B2	Main output remote sense
B3	Main output current share
B4	PS_INHIBIT / PS_Kill
B5	STANDBY
B6	STANDBY Return
C1	ADC (I <sup>2</sup> C Data Signal)
C2	SCL (I <sup>2</sup> C Clock Signal)
C3	POWER GOOD
C4	Spare
C5	STANDBY
C6	STANDBY RETURN
D1	A0 (I <sup>2</sup> C Address BIT 0 Signal)
D2	A1 (I <sup>2</sup> C Address BIT 1 Signal)
D3	S_INT (Alarm)
D4	STANDYBY RMT SENSE
D5	STANDBY
D6	STANDBY RETURN

## WORLDWIDE OFFICES

### Americas

2900 S.Diablo Way  
Tempe, AZ 85282  
USA  
+1 888 412 7832

### Europe (UK)

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
+44 (0) 1384 842 211

### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333



[www.artesyn.com](http://www.artesyn.com)

Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit [www.artesyn.com/legal](http://www.artesyn.com/legal).

For more information: [www.artesyn.com/power](http://www.artesyn.com/power)  
For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View DS1200DC-3-002 on WIN SOURCE](#)
-  [Artesyn Embedded Technologies Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management