






**THE DATASHEET OF
NX5032GA-12.000M-STD-CSU-2**



Specification of Crystal Unit

1	NDK PART NUMBER	NX5032GA (STD-CSU-1)(STD-CSU-2) NX5032GA
5	Type	
6	Electrical characteristics	* ATTACHED SHEETS 3
6.1	Nominal frequency(F0)	8MHZ to40MHZ
6.2	Overtone order	Fundamental
6.3	Adjustment tolerance	$\pm 50 \times 10^{-6}$ max. (+25 °C)
6.4	Tolerance over the temperature range	$\pm 150 \times 10^{-6}$ max. (-40~+150 °C) The reference temperature shall be +25 °C.
6.5	Equivalent resistance (R1)	*ATTACHED SHEETS 3
6.6	Shunt Capacitance (C0)	NA
6.7	Motional Capacitance (C1)	500 μ W max.
7	Measurement circuit	
7.2	Frequency measurement	π circuit
7.1.1	Measuring instrument	8pF
7.1.2	Load capacitance(CL)	10 μ W
7.1.3	Level of drive	
7.2	Equivalent resistance measurement	π circuit
7.2.1	Measuring instrument	Series
7.2.2	Load capacitance(CL)	10 μ W
7.2.3	Level of drive	

8 Dimension

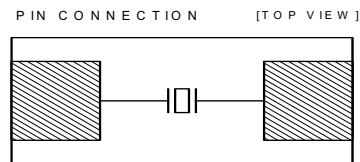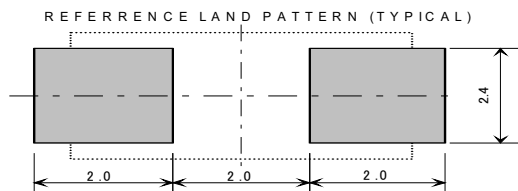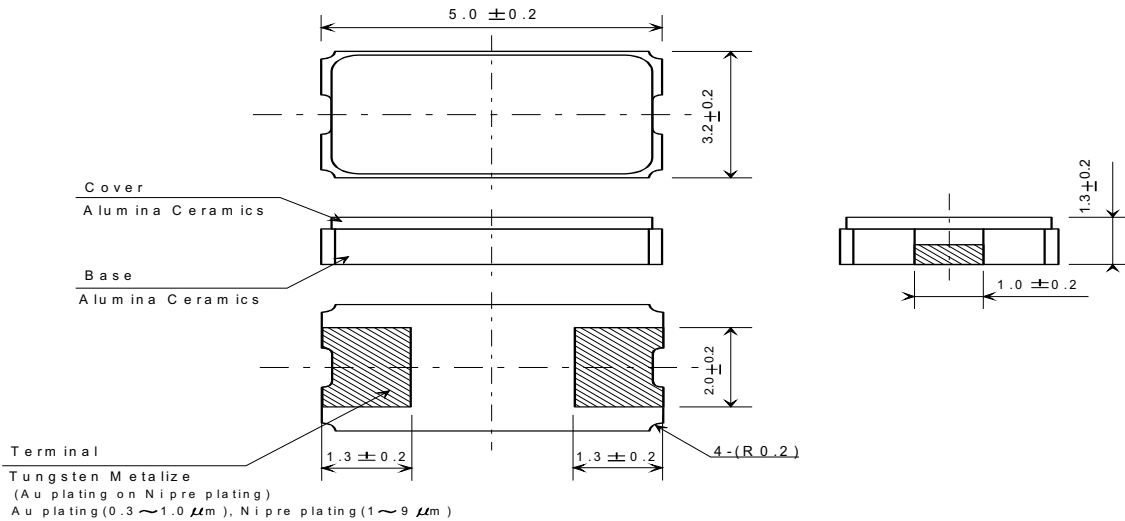

Frequency(MHz)	CI(ESR)
8	300
10	120 ohm
12	120 ohm
16	120 ohm
20	70 ohm
40	50 ohm

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View NX5032GA-12.000M-STD-CSU-2 on WIN SOURCE](#)
- ⊖ [NDK Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management