






## Code Conductor, Long Barrel, Butt Splice

For Use with Stranded Copper Conductors

### Type SCL

- Long barrel maximizes the number of crimps and provides premium wire pull-out strength and electrical performance
- Color-coded barrels marked with Panduit and specified competitor die index numbers for proper crimp die selection
- Internal wire stops to prevent over-insertion of conductor
- Tin-plated to inhibit corrosion
- UL Listed and CSA Certified to 35 KV\*\* and temperature rated to 90°C when crimped with Panduit and specified competitor crimping tools and dies
- UL Listed and CSA Certified for wide wire range-taking capability when crimped with Panduit® Uni-Die™ Dieless Crimping Tools‡
- Tested by Telcordia – meets NEBS Level 3

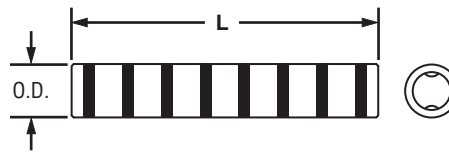

| Part Number | Copper Conductor Size          | Figure Dimensions (In.) |      | Panduit Color Code | Panduit Die Index No.‡ | Burndy Die Index No.‡ | T&B Die Index No.‡ | Wire Strip Length (In.) | Std. Pkg. Qty. |
|-------------|--------------------------------|-------------------------|------|--------------------|------------------------|-----------------------|--------------------|-------------------------|----------------|
|             |                                | Barrel O.D.             | L    |                    |                        |                       |                    |                         |                |
| SCL8-L      | #8 AWG                         | 0.27                    | 2.25 | Red                | P21                    | 49                    | 21                 | 1 1/16                  | 50             |
| SCL6-L      | #6 AWG                         | 0.31                    | 2.38 | Blue               | P24                    | 7                     | 24                 | 1 1/8                   | 50             |
| SCL4-L      | #4 – #3 AWG STR,<br>#2 AWG SOL | 0.38                    | 2.38 | Gray               | P29                    | 8                     | 29                 | 1 1/8                   | 50             |
| SCL2-Q      | #2 AWG                         | 0.42                    | 2.62 | Brown              | P33                    | 10                    | 33                 | 1 1/4                   | 25             |
| SCL1-E      | #1 AWG                         | 0.47                    | 2.87 | Green              | P37                    | 11                    | 37                 | 1 3/8                   | 20             |
| SCL1/0-X    | 1/0 AWG                        | 0.52                    | 2.87 | Pink               | P42                    | 12                    | 42                 | 1 3/8                   | 10             |
| SCL2/0-X    | 2/0 AWG                        | 0.58                    | 3.13 | Black              | P45                    | 13                    | 45                 | 1 1/2                   | 10             |
| SCL3/0-X    | 3/0 AWG                        | 0.64                    | 3.12 | Orange             | P50                    | 14                    | 54                 | 1 1/2                   | 10             |
| SCL4/0-X    | 4/0 AWG                        | 0.71                    | 3.37 | Purple             | P54                    | 15                    | 54                 | 1 5/8                   | 10             |
| SCL250-X    | 250 kcmil                      | 0.77                    | 3.38 | Yellow             | P62                    | 16                    | 62                 | 1 5/8                   | 10             |
| SCL300-X    | 300 kcmil                      | 0.81                    | 4.12 | White              | P66                    | 17                    | 66                 | 2                       | 10             |
| SCL350-X    | 350 kcmil                      | 0.88                    | 4.12 | Red                | P71                    | 18                    | 71                 | 2                       | 10             |
| SCL400-6    | 400 kcmil                      | 0.95                    | 4.37 | Blue               | P76                    | 19                    | 76                 | 2 1/8                   | 6              |
| SCL500-6    | 500 kcmil                      | 1.06                    | 4.62 | Brown              | P87                    | 20                    | 87                 | 2 1/4                   | 6              |
| SCL600-6    | 600 kcmil                      | 1.19                    | 5.50 | Green              | P94                    | 22                    | 94                 | 2 11/16                 | 6              |
| SCL750-6    | 750 kcmil                      | 1.30                    | 5.87 | Black              | P106                   | 24                    | 106                | 2 7/8                   | 6              |
| SCL1000-3   | 1000 kcmil                     | 1.50                    | 6.12 | White              | P125                   | 27                    | 125                | 3                       | 3              |

‡See pages D3.62 – D3.65 for tool and die information.

\*\*Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 V.

A. System Overview

B1. Cable Ties

B2. Cable Accessories

B3. Stainless Steel Ties

C1. Wiring Duct

C2. Surface Raceway

C3. Abrasion Protection

C4. Cable Management

D1. Terminals

D2. Power Connectors

D3. Grounding Connectors

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers


E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

F. Index

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SCL8-L on WIN SOURCE](#)

 [Panduit Corp](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management