




THE DATASHEET OF SCSF2-E



UL® c SP® Sta-Strap® Cable Ties – Heat Stabilized Nylon 6.6

- For high temperature applications up to 239°F (115°C) – indoor use
- Used for normal bundling and through-panel applications
- *Heavy head* design is available for use in through-panel applications with a larger opening up to .400" (10.2mm)
- Small head height allows more efficient use of space in compact areas

- Exclusive two-piece design offers the lowest threading force in the industry
- Average 14% lighter than one-piece cable ties
- Releasable prior to final tensioning for bundle modifications

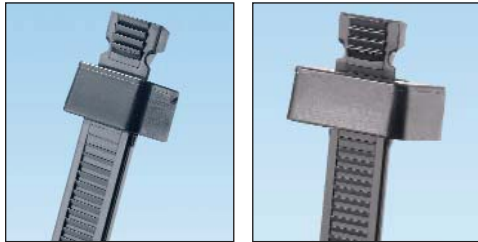

SST

SST2HH



| Part Number | Length | | Width | | Thickness | | Max. Bundle Dia. | | Min. Loop Tensile Str. | | Recommended Installation Tool | Std. Pkg. Qty. | Std. Ctn. Qty. |
|--|--------|-----|-------|-----|-----------|-----|------------------|-----|------------------------|-----|--|----------------|----------------|
| | In. | mm | In. | mm | In. | mm | In. | mm | Lbs. | N | | | |
| Miniature Cross Section | | | | | | | | | | | | | |
| SST1M-M30 | 4.0 | 102 | .095 | 2.4 | .035 | .9 | .78 | 20 | 18 | 80 | GTS, GTSL, GS2B, PTS, PPTS, STS2 | 1000 | 50000 |
| SST1.5M-M30 | 5.5 | 140 | .095 | 2.4 | .037 | .9 | 1.25 | 32 | 18 | 80 | | 1000 | 50000 |
| Standard Cross Section | | | | | | | | | | | | | |
| SST2S-M30 | 6.7 | 172 | .180 | 4.6 | .045 | 1.2 | 1.75 | 45 | 50 | 222 | GTS, GTSL, GS2B, GTH, GS4H, PTS, PTH, PPTS, STS2, STH2 | 1000 | 15000 |
| SST3S-M30 | 11.0 | 279 | .180 | 4.6 | .048 | 1.2 | 3.00 | 76 | 50 | 222 | | 1000 | 10000 |
| SST4S-M30 | 15.0 | 381 | .180 | 4.6 | .048 | 1.2 | 4.00 | 102 | 50 | 222 | | 1000 | 5000 |
| Light-Heavy Cross Section | | | | | | | | | | | | | |
| SST4H-D30 | 14.8 | 376 | .300 | 7.6 | .067 | 1.7 | 4.00 | 102 | 120 | 534 | GTH, GS4H, GS4EH, PTH, STH2, ST3EH | 500 | 2500 |
| SST8H-D30 | 27.5 | 699 | .300 | 7.6 | .067 | 1.7 | 8.00 | 203 | 120 | 534 | | 500 | 2000 |
| Heavy Head Design Light-Heavy Cross Section | | | | | | | | | | | | | |
| SST2HH-D30 | 8.0 | 203 | .300 | 7.6 | .062 | 1.6 | 2.00 | 50 | 120 | 534 | GTH, GS4H, GS4EH, PTH, STH2, ST3EH | 500 | 2500 |
| SST4HH-D30 | 14.8 | 376 | .300 | 7.6 | .062 | 1.6 | 4.00 | 102 | 120 | 534 | | 500 | 2500 |

A. System Overview

B1. Cable Ties

B2. Cable Accessories

B3. Stainless Steel Ties

C1. Wiring Duct

C2. Surface Raceway

C3. Abrasion Protection

C4. Cable Management

D1. Terminals

D2. Power Connectors

D3. Grounding Connectors

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers



E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

F. Index

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View SCSF2-E on WIN SOURCE](#)
-  [Panduit Corp Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management