



**THE DATASHEET OF
S2-56R-X**






Tubular Ring Terminal, Non-Insulated

Type S-R

- Seamless tubular barrel provides a consistent high performance quality crimp
- Round double thick tongue for reliable power applications
- Barrel of terminal internally beveled to provide quick and easy wire insertion
- Inspection window allows visual inspection of proper wire insertion
- Maximum recommended operating temperature 302°F (150°C)
- UL and CSA rated up to 2000 V per UL 486A – 486B

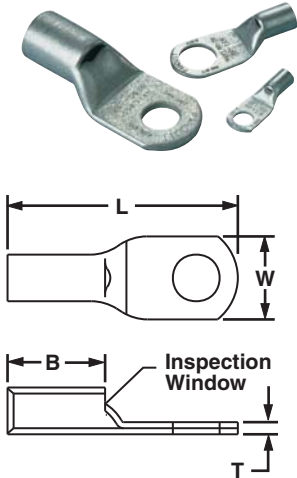

Min. Tensile Strength of Tubular Ring Terminals			
#8	#6	#4	#2
90	100	140	180

Part Number	Wire Range	Stud Hole Size	Tongue Width (In.)	Figure Dimensions (In.)			Recommended Installation Tool	Std. Pkg. Qty.**	Std. Ctn. Qty.		
				W	L	B				T	
S8-10R-Q	8 AWG	#10	0.41	1.10	0.40	0.08	CT-1700, CT-720, CT-930, CT-930CH, CT-940CH, CT-2001, CT-2002, CT-2931, CT-2940	25	250		
S8-14R-Q		1/4"	0.48	1.20	0.40	0.07		25	–		
S8-56R-Q		5/16"	0.60	1.30	0.40	0.05		25	250		
S8-38R-Q		3/8"	0.60	1.40	0.40	0.05		25	250		
S6-10R-E	6 AWG	#10	0.45	1.20	0.48	0.09		CT-1700, CT-720, CT-930, CT-930CH, CT-940CH, CT-2001, CT-2002, CT-2931, CT-2940	20	200	
S6-14R-E		1/4"	0.48	1.30	0.48	0.08			20	–	
S6-56R-E		5/16"	0.56	1.40	0.48	0.07			20	200	
S6-38R-E		3/8"	0.62	1.50	0.48	0.06			20	200	
S4-10R-E	4 AWG	#10	0.55	1.20	0.48	0.09			CT-1700, CT-720, CT-930, CT-930CH, CT-940CH, CT-2001, CT-2002, CT-2931, CT-2940	20	200
S4-14R-E		1/4"	0.55	1.30	0.48	0.09				20	200
S4-56R-E		5/16"	0.55	1.40	0.48	0.09				20	200
S4-38R-E		3/8"	0.62	1.50	0.48	0.07				20	200
S2-10R-X	1 – 2 AWG	#10	0.70	1.60	0.59	0.11	CT-720, CT-930, CT-930CH, CT-940CH, CT-2001, CT-2002, CT-2980, CT-980CH, CT-2931, CT-2940			10	100
S2-14R-X		1/4"	0.70	1.60	0.59	0.11				10	100
S2-56R-X		5/16"	0.70	1.70	0.59	0.11				10	100
S2-38R-X		3/8"	0.70	1.70	0.59	0.11				10	100
S2-12R-X	2/0 AWG	1/2"	0.79	1.90	0.59	0.09		CT-720, CT-930, CT-930CH, CT-940CH, CT-2001, CT-2002, CT-2980, CT-980CH, CT-2931, CT-2940		10	100
S1/0-14R-X		1/4"	0.76	1.60	0.58	0.12				10	100
S1/0-56R-X		5/16"	0.76	1.70	0.58	0.12				10	100
S1/0-38R-X		3/8"	0.76	1.70	0.58	0.12				10	100
S1/0-12R-X	3/0 AWG	1/2"	0.82	1.90	0.58	0.12			CT-720, CT-930, CT-930CH, CT-940CH, CT-2001, CT-2002, CT-2980, CT-980CH, CT-2931, CT-2940	10	100
S2/0-14R-X		1/4"	0.85	1.90	0.66	0.13				10	100
S2/0-56R-X		5/16"	0.85	1.90	0.66	0.13				10	100
S2/0-38R-X		3/8"	0.85	1.90	0.66	0.13				10	100
S2/0-76R-X	4/0 AWG	7/16"	0.85	2.10	0.66	0.13	CT-720, CT-930, CT-930CH, CT-940CH, CT-2001, CT-2002, CT-2980, CT-980CH, CT-2931, CT-2940			10	100
S2/0-12R-X		1/2"	0.85	2.10	0.66	0.13				10	100
S3/0-14R-5		1/4"	0.96	2.10	0.83	0.13				5	50
S3/0-56R-5		5/16"	0.96	2.10	0.83	0.13				5	50
S3/0-38R-5	250 kcmil	3/8"	0.96	2.10	0.83	0.13		CT-720, CT-930, CT-930CH, CT-940CH, CT-2001, CT-2002, CT-2980, CT-980CH, CT-2931, CT-2940		5	50
S3/0-76R-5		7/16"	0.96	2.30	0.83	0.13				5	50
S3/0-12R-5		1/2"	0.96	2.30	0.83	0.13				5	50
S4/0-56R-5		5/16"	1.06	2.30	0.91	0.14				5	50
S4/0-38R-5	250 kcmil	3/8"	1.06	2.30	0.91	0.14			CT-720, CT-930, CT-930CH, CT-940CH, CT-2001, CT-2002, CT-2980, CT-980CH, CT-2931, CT-2940	5	50
S4/0-76R-5		7/16"	1.06	2.50	0.91	0.14				5	50
S4/0-12R-5		1/2"	1.06	2.50	0.91	0.14				5	50
S250-56R-5		5/16"	1.17	2.50	1.01	0.14				5	50
S250-38R-5	250 kcmil	3/8"	1.17	2.50	1.01	0.14	CT-720, CT-930, CT-930CH, CT-940CH, CT-2001, CT-2002, CT-2980, CT-980CH, CT-2931, CT-2940			5	50
S250-76R-5		7/16"	1.17	2.60	1.01	0.14				5	50
S250-12R-5		1/2"	1.17	2.60	1.01	0.14				5	50

For crimping tool information, see pages D1.84, D1.87, D3.37 – D3.46.

**Bulk packaging may be available, contact Panduit Customer Service for additional information.

A. System Overview

B1. Cable Ties

B2. Cable Accessories

B3. Stainless Steel Ties

C1. Wiring Duct

C2. Surface Raceway

C3. Abrasion Protection

C4. Cable Management

D1. Terminals

D2. Power Connectors

D3. Grounding Connectors

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers

E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

F. Index

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View S2-56R-X on WIN SOURCE](#)

 [Panduit Corp](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management