




**THE DATASHEET OF  
SNT-100-RD-G-H**



# SHUNTS & JUMPERS

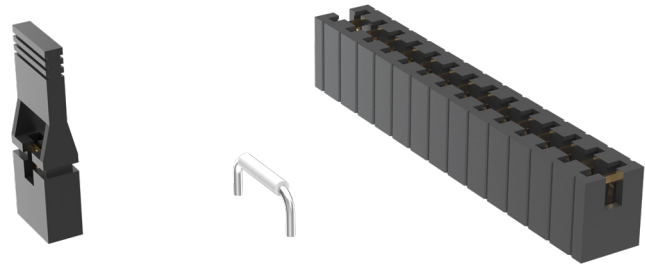

(2.54 mm) .100" PITCH • SNT/MNT/2SN/SNM/PK/JL SERIES

## SNT/MNT

### Mates:

TSW, HTSW, MTSW,  
HMTSW, TLW, DW, EW,  
ZW, HW, TSM, BST, PHT

## 2SN

### Mates:

TMMH, TMM,  
MTMM, MMT, TW,  
LTMM, ZLTMM, TSH, EHT

## SNM

### Mates:

TMS, MTMS, DWM

## SPECIFICATIONS

### SNT

#### Insulator Material:

Glass Filled Polyester

#### Contact Material:

Phosphor Bronze

#### Current Rating (SNT/TSW):

4.3 A per pin

(1 pin powered per row)

#### Operating Temp Range:

-55 °C to +125 °C (Gold)

-55 °C to +105 °C (Tin)

#### Insertion Depth:

(4.32 mm) .170" minimum

#### Lead Size accepted:

(0.64 mm) .025" SQ

### MNT

Same as SNT except:

#### Current Rating (MNT/TSM):

3.9 A per pin

(1 pin powered per row)

#### Working Voltage:

450 VAC

### 2SN

Same as SNT except:

#### Insertion Depth:

(2.29 mm) .090" minimum

#### Lead Size accepted:

(0.51 mm) .020" SQ

### SNM


Same as SNT except:

#### Insertion Depth:


(3.43 mm) .135" minimum

#### Max Processing Temp:



Not recommended for IR/VP

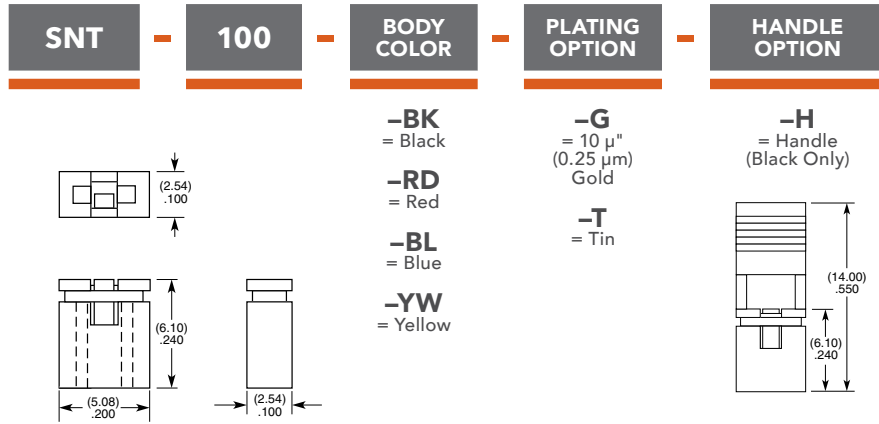

**Note:**  
Other Gold plating options available.

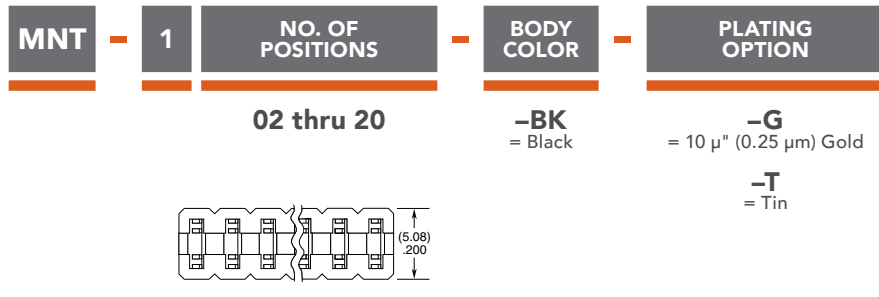

**Note:**  
Some lengths, styles and options are non-standard, non-returnable.

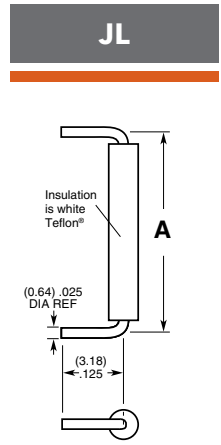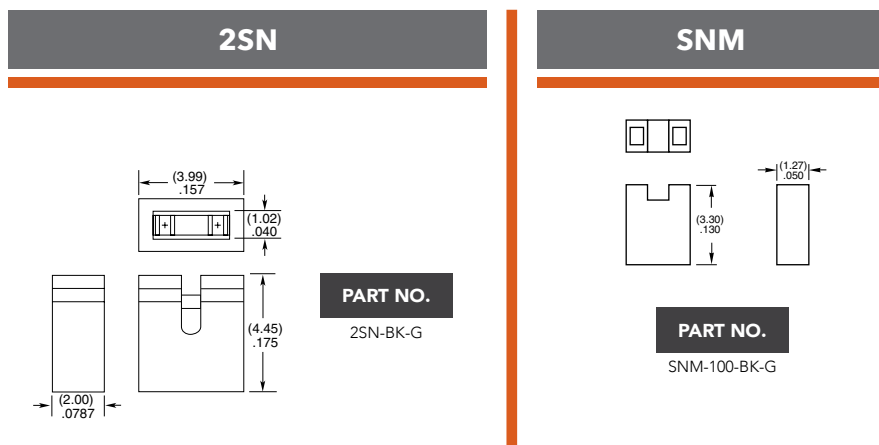

PART NO.	A
JL-100-25-T	(2.54) .100
JL-250-25-T	(6.35) .250
JL-400-25-T	(10.16) .400

**Note:**  
For complete specifications see [www.samtec.com?JL](http://www.samtec.com?JL)



PART NO.	A	B
PK-01-06	(0.64) .025 SQ	(5.84) .230
PK-01-07	(0.51) .020 SQ	(3.18) .125

**Insulator Material:**  
Natural Thermoplastic

**Note:**  
Order per wheel.  
6 pins per wheel.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SNT-100-RD-G-H on WIN SOURCE](#)

 [Samtec Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management