



# Model 7000

DC to 1MHz

Low Noise Differential Preamplifier

- **Noise (RTI):** 7nV/√Hz
- **Gain Settings:** x1, x10, x100 and x1000
- **Amplitude Flatness:** ±0.3dB
- **Output:** ±10V Peak
- **Selectable Bandwidth:**  
100Hz, 3kHz, 30kHz,  
100kHz and 1MHz (LP Off)
- **CMRR:** >100dB at 1kHz
- **Optional RMS-to-DC Output**



## DESCRIPTION

The Krohn-Hite Model 7000 Differential Preamplifier provides a low noise high gain amplification to 1MHz with an AC output derived from a very low noise FET instrumentation amplifier and an optional DC (RMS-to-DC converted) output. The Model 7000 has fixed gain settings of x1 (0dB), x10 (20dB), x100 (40dB) and x1000 (60dB) over a selectable bandwidths of 100Hz, 1kHz (HP), 3kHz, 30kHz, 100kHz and 1MHz (LP Off). Noise referred to input is 7nV/√Hz and common mode rejection is >100dB at 1kHz.

The Model 7000 also provides momentary pushbutton switches that control coupling, bandwidth, gain and channel on/off selections. BNC connectors are provided for single-ended and differential input, ac output, and RMS-to-DC output (optional) connections.

The Model 7000 is very useful for troubleshooting sources of noise, amplifiers, power supplies and various other electronic circuits. The Model 7000 is an excellent tool as a preamp for amplifying low level input signals to oscilloscopes or other devices.

## SPECIFICATIONS

### INPUT

**Configurations:** Single-ended and differential.

**Coupling:** AC (0.16Hz) and DC, switch selectable.

**Impedance:** 1M ohm shunted by 40pF. Each input may be independently enabled or grounded.

**Maximum Input Voltage:** 10V peak with gain set to x1.

**Max Safe Voltage:** Any continuous voltage between ±30V.

**Gains:** 2 pushbutton momentary switches, x1 (0dB), x10 (20dB), x100 (40dB), x1000 (60dB).

**Accuracy:** ±0.3dB.

**Stability:** 200ppm/°C.

**Bias:** 15pA typical, 50pA max.

## CMMR

FREQ	GAIN = 1	GAIN = 10 to 1k
50Hz	>90dB	>105dB
10kHz	>75dB	>90dB
50kHz	>60dB	>75dB

## FILTERS

**Filtering:** Frequency limited by a switch selectable 12dB/octave filter, with -3dB points of 1kHz, high-pass and 100Hz, 3kHz, 30kHz, 100kHz, low-pass. LP OFF position to turn off low-pass filtering, bandwidth is 1MHz.


### Wideband Noise (RMS - 2MHz Bandwidth Detector)

GAIN	FILTER OFF (μV)	100kHz FILTER (μV)
1	120	90
10	14	9
100	10	3.2
1k	10	3.2

Noise Density (x1k gain setting, all filters off): 7nV/√Hz typical.

## OUTPUT

Maximum Output Voltage: 10V peak.

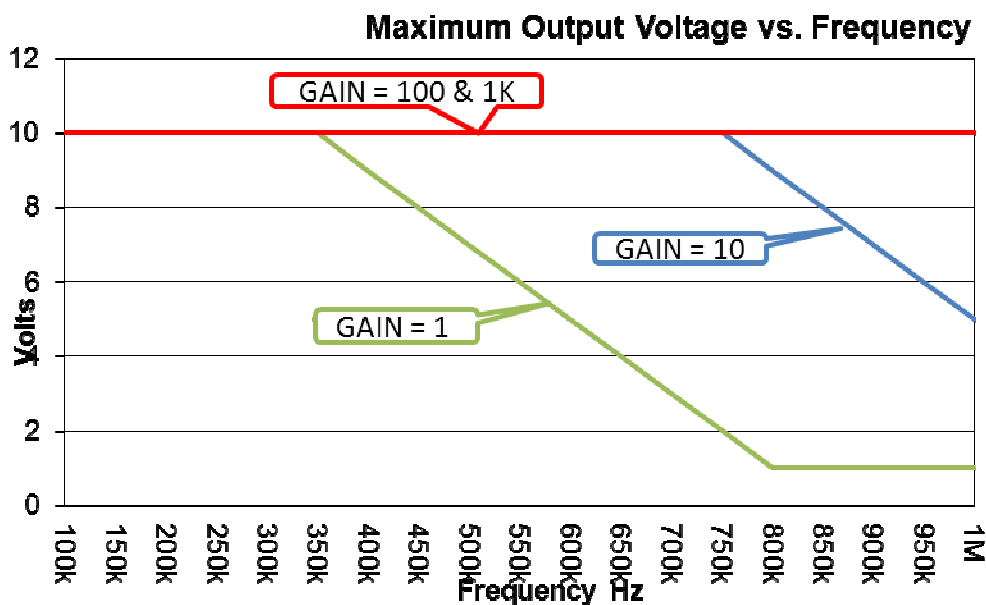

**Impedance:** 50 ohms, single-ended.

**Distortion:** 0.005% (-85dB) at 1kHz.

**Offset Voltage:** Adjustable to zero, front panel.

## GENERAL

**Protection:** Input overload protection with automatic recovery.

**Isolation to Chassis:**  $\pm 200\text{Vdc}$ .

**Operating Temperature:** 0°C to +45°C.

**Storage Temperature:** -25°C to +70°C.

## FRONT PANEL

Momentary switches for Coupling, Bandwidth, Input On/Off, and Gain. BNC connectors for + Input, - Input, AC Output and optional RMS-to-DC Output.

## REAR PANEL

Switch selectable line switch for 115V/230V ac operation, 3-terminal AC line receptacle.

**Power Requirements:** Switch selectable, 105-130, 210-260 volts, single phase, 50-60Hz, 11 watts.

**Dimensions:** 3.5" (9cm) high, 9" (23cm) wide, 8.5" (21.7cm) deep.

**Weight:** Net weight 5 lbs (2.3kg), gross weight 7 lbs (3.2kg).

## OPTIONS

**RMS to DC Output:** The RMS-TO-DC Output terminal provides a true RMS DC voltage representation of the OUTPUT signal. Range is 0V to 10V.

### Frequency Response:

Amplitude (rms)	1% Error Bandwidth	10% Error Bandwidth
7V	100kHz	1MHz
2V	200kHz	1MHz
1V	200kHz	1MHz
100mV	100kHz	400kHz
10mV	10kHz	40kHz

## ACCESSORIES

**Rack Mount Kit:** Part No. RK-39 permits the installation of the Model 7000 into a standard, 19" rack spacing.


**CAB-025:** Cable, BNC, 3ft, Low Noise

**Extended 1 Year Warranty:** Part No. EW7000.

Specifications subject to change without notice.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 7000 on WIN SOURCE](#)
-  [Krohn-Hite Corporation Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management