






THE DATASHEET OF H11N3

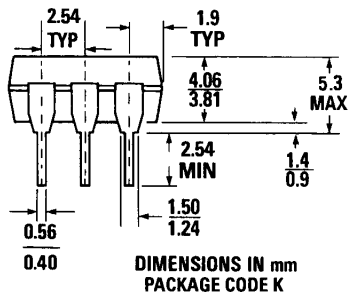

PACKAGE DIMENSIONS

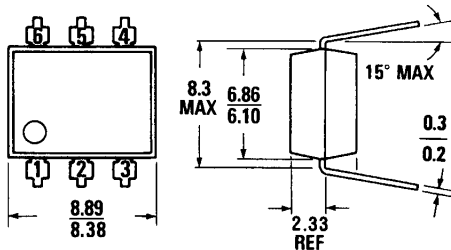

ST1603A

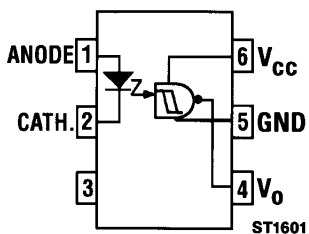

Equivalent Circuit

DESCRIPTION

The H11N series has a medium-to-high speed integrated circuit detector optically coupled to a gallium-aluminum-arsenide infrared emitting diode. The output incorporates a Schmitt trigger, which provides hysteresis for noise immunity and pulse shaping. The detector circuit is optimized for simplicity of operation and utilizes an open collector output for maximum application flexibility.

FEATURES & APPLICATIONS

- High data rate, 5 MHz typical (NRZ)
- Free from latch up and oscillation throughout voltage and temperature ranges
- Microprocessor compatible drive
- Logic compatible output sinks 16 mA at 0.5 V maximum
- Guaranteed on/off threshold hysteresis
- High common mode transient immunity 2000 V/ μ s minimum
- Fast switching: $t_r, t_f = 10$ ns typical
- Wide supply voltage capability, compatible with all popular logic systems
- Underwriters Laboratory (UL) recognized — file #E90700
- Logic to logic isolator
- Programmable current level sensor
- Line receiver—eliminates noise and transient problems
- Logic level shifter—couples TTL to CMOS
- A.C. to TTL conversion—square wave shaping
- Isolated power MOS driver for power supplies
- Interfaces computers with peripherals

ABSOLUTE MAXIMUM RATINGS

TOTAL PACKAGE

Storage temperature -55°C to 125°C
Operating temperature -25°C to 85°C
Lead solder temperature 260°C for 10 sec

INPUT DIODE

Power dissipation (25°C ambient) 50 mW
Derate linearly (above 70°C) $1.67\text{ mW}/^{\circ}\text{C}$
Continuous forward current 30 mA
Peak forward current
($300\mu\text{s}$ pulse, 2% duty cycle) 50 mA
Reverse voltage 6 V

DETECTOR

Power dissipation (at 25°C ambient) 150 mW
Derate linearly (above 25°C ambient) $5\text{ mW}/^{\circ}\text{C}$
 V_{as} allowed range 0 to 16 V
 V_{es} allowed range 0 to 16 V
 I_o output current 50 mA

ELECTRICAL CHARACTERISTICS ($T_A = 0-70^\circ\text{C}$ Unless Otherwise Specified) Note 1

INDIVIDUAL COMPONENT CHARACTERISTICS

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
INPUT DIODE						
Forward voltage	V_F		1.6	2.0	V	$I_F = 10\text{ mA}$
	V_F	0.75	1.45		V	$I_F = 0.3\text{ mA}$
Reverse current	I_R			10	μA	$V_R = 5\text{ V}, T_A = 25^\circ\text{C}$
	I_R			100	μA	$V_R = 5\text{ V}, T_A = 100^\circ\text{C}$
Capacitance	C_J			100	pF	$V = 0\text{ V}, f = 1\text{ MHz}$
OUTPUT DETECTOR						
Operating voltage range	V_{CC}	4		15	V	
Supply current	$I_{S(off)}$		5.5	10	mA	$I_F = 0, V_{CC} = 5\text{ V}$
Output current, high	I_{OH}			100	μA	$I_F = 0.3\text{ mA}, V_{CC} = V_O = 15\text{ V}$

TRANSFER CHARACTERISTICS ($T_A = 0-70^\circ\text{C}$) Note 1

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
Supply current	$I_{S(on)}$		5	10	mA	$I_F = 10\text{ mA}, V_{CC} = 5\text{ V}$
Output voltage, low	V_{OL}		0.3	0.5	V	$R_L = 270\ \Omega, V_{CC} = 5\text{ V}, I_F = I_{F(on)}\text{ max.}$
Turn-on threshold current	(H11N1) $I_{F(on)}$	0.8		3.2	mA	$R_L = 270\ \Omega, V_{CC} = 5\text{ V}$
	(H11N2) $I_{F(on)}$	2.3		5.0	mA	$R_L = 270\ \Omega, V_{CC} = 5\text{ V}$
	(H11N3) $I_{F(on)}$	4.1		10.0	mA	$R_L = 270\ \Omega, V_{CC} = 5\text{ V}$
Turn-off threshold current	$I_{F(off)}$	0.3	1.5		mA	$R_L = 270\ \Omega, V_{CC} = 5\text{ V}$
Hysteresis ratio	$I_{F(off)}/I_{F(on)}$	0.65	0.8	0.95		$R_L = 270\ \Omega, V_{CC} = 5\text{ V}$

DYNAMIC CHARACTERISTICS ($T_A = 0-70^\circ\text{C}$) Note 1						
PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
SWITCHING SPEED (Figures 7&8)						
Propagation delay, high to low	t_{PHL}		150	330	ns	$C=120\text{ pF}$, $t_p=1\text{ }\mu\text{s}$, R_E : Note 4
Rise time	t_r		10		ns	$C=120\text{ pF}$, $t_p=1\text{ }\mu\text{s}$, R_E : Note 4
Propagation delay, low to high	t_{PLH}		150	330	ns	$C=120\text{ pF}$, $t_p=1\text{ }\mu\text{s}$, R_E : Note 4
Fall time	t_f		15		ns	$C=120\text{ pF}$, $t_p=1\text{ }\mu\text{s}$, R_E : Note 4
Data rate			5		MHz	Note 3
OVERDRIVE SWITCHING (FIGURES 7&8), NOTE 2						
Turn-off time	t_{off}		0.2	0.5	μs	$C=0$, $R_i=270\text{ }\Omega$, $I_c(\text{MAX})$ H11N1: 5 mA H11N2: 10 mA H11N3: 20 mA
TRANSIENT IMMUNITY (FIGURE 9)						
Common mode transient immunity	CM_H	± 2000	± 10000		V/ μs	$V_{pk}=50\text{ V}$, $V_{CC}=5\text{ V}$, $R_i=270\text{ }\Omega$, $I_F=0$
Common mode transient immunity	CM_L	± 2000	± 10000		V/ μs	$V_{pk}=50\text{ V}$, $V_{CC}=5\text{ V}$, $R_i=270\text{ }\Omega$, $I_F=0$

ISOLATION CHARACTERISTICS						
CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
Surge isolation voltage	V_{ISO}	7500			V_{PEAK}	1 Minute
Surge isolation voltage	V_{ISO}	5300			V_{RMS}	1 Minute

Notes						
1. All measurements are with 100nF bypass capacitor from pin 6 to pin 5.						
2. Steady overdrive increases t_{off} . Use of a large R_i and a small C as in figure 7 is preferred over overdrive current.						
3. Maximum data rate will vary depending on the bias conditions and is usually highest when R_i and C are matched to $I_{F(OPT)}$ and V_{CC} is between 5 and 15V. With this optimized bias, most units will operate at over 10 MHz, NRZ.						
4. H11N1: $R_E = 910\Omega$, H11N2: $R_E = 560\Omega$, H11N3: $R_E = 240\Omega$.						

TYPICAL CHARACTERISTICS

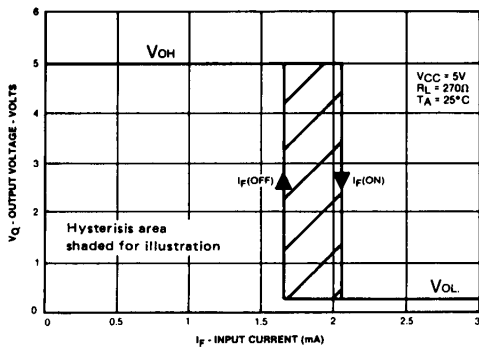


Figure 1. Transfer characteristics ST2022

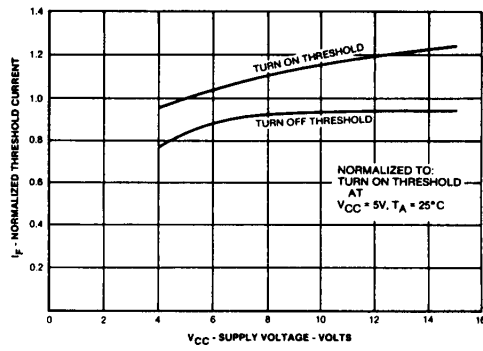


Figure 2. Threshold current vs. supply voltage ST2023

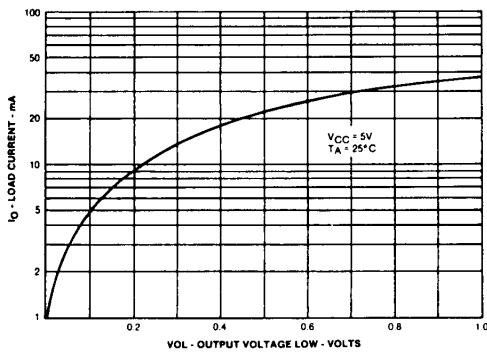


Figure 3. ON voltage vs. current ST2024

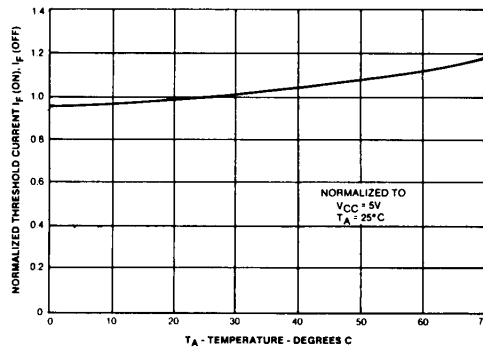


Figure 4. Threshold current vs. temperature ST2025

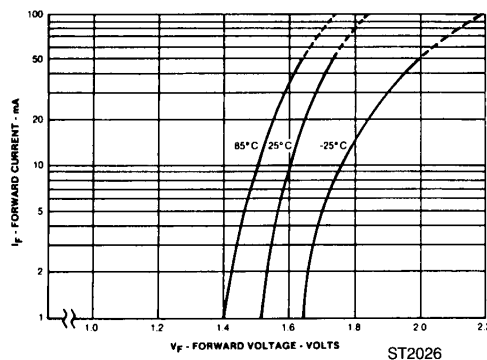


Figure 5. Forward voltage vs. forward current ST2026


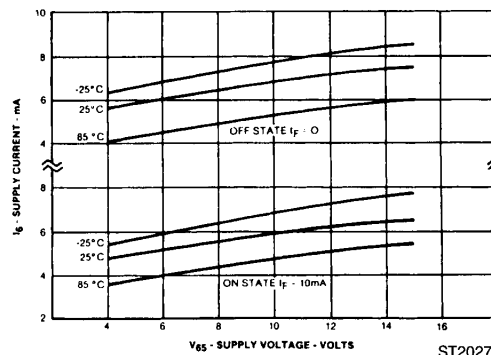


Figure 6. Supply current vs. supply voltage ST2027

TYPICAL CHARACTERISTICS

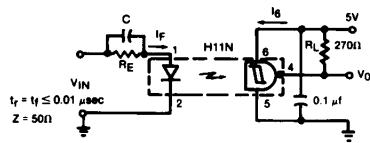

ST2028






Figure 7. Switching test circuit

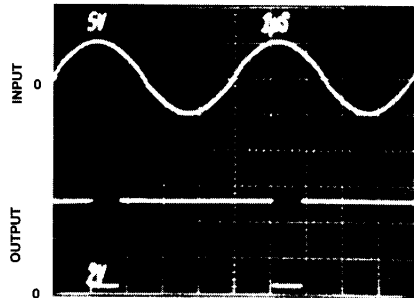


$R_E = 910 \Omega$
 $C = 120 \text{ pF}$

ST2029

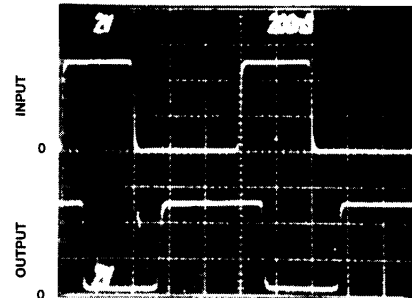

$R_E = 910 \Omega$
 $C = 120 \text{ pF}$

Figure 8. Switching test waveforms



ST2030

Figure 9. Common-mode transient immunity, test circuit and voltage waveforms

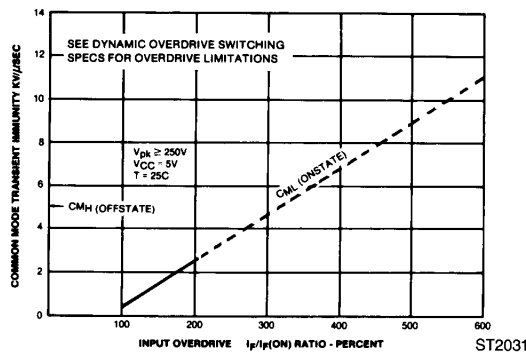



Figure 10. CM_i and CM_H input current

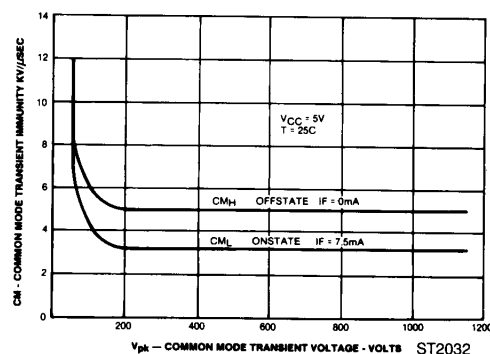


Figure 11. CM_i and CM_H vs. common-mode transient voltage



HIGH-SPEED AlGaAs SCHMITT TRIGGER OPTOCOUPLEDERS

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.



LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View H11N3](#) on WIN SOURCE
-  [ON Semiconductor](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management