



**THE DATASHEET OF  
ACPM-9417-TR2**



# ACPM-9417-TR2

## LTE Band 12, Band 17 MIPI ET PA

### 2.0 mm × 2.5 mm

## Power Amplifier Module

### Product Brief



#### Description

The ACPM-9417 is a fully matched 10-pin surface mount power amplifier module developed for LTE Band 12 and Band 17. The 2 mm × 2.5 mm form-factor package is self contained, and it incorporates 50-ohm input and output matching networks.

The ACPM-9417 features CoolPAM circuit technology that supports two power modes—low and high. The CoolPAM is a stage bypass technology that enhances PAE (power added efficiency) at low power range.

The power amplifier is manufactured on an advanced InGaP HBT (hetero-junction bipolar transistor) MMIC (microwave monolithic integrated circuit) technology that offers state-of-the-art reliability, temperature stability, and ruggedness.

#### Features

- Thin package (0.93 mm typical)
- Excellent linearity in envelope tracking mode
- MIPI RFFE interface
- Two-mode power
- Quiescent current control for high power mode and low power mode
- Ten-pin surface mounting package
- Internal 50-ohm matching networks for both RF input and output
- Separate drive and output VCC supplies
- Low bypass capacitance
- Green – Lead-free and RoHS compliant

#### Applications


- Band 12 LTE
- Band 17 LTE

#### Ordering Information


Part Number	Number of Devices	Container
ACPM-9417-TR2	1,000	178 mm (7 in.) tape/reel

## Package Dimensions

The dimensions are in millimeters.

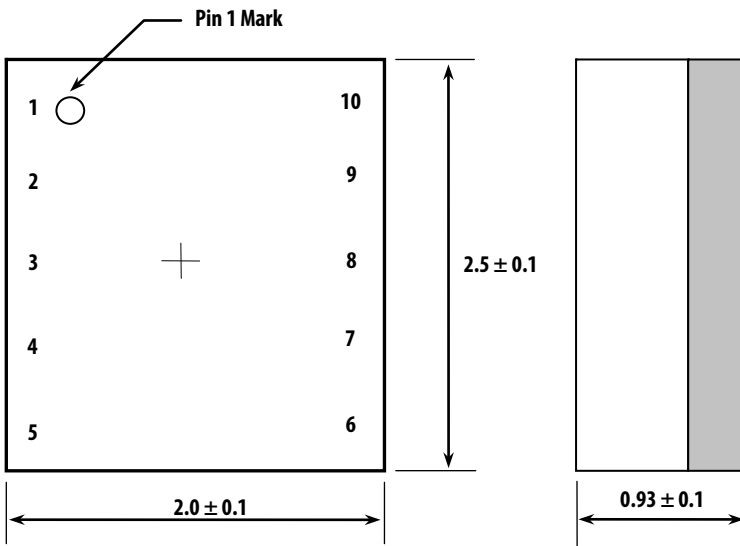

## Marking Specification

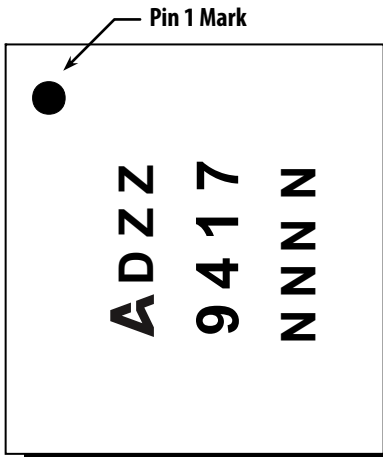

- D – Date Code
- ZZ – Assembly Lot Identification
- 9417 – Device Code

## Pin Description

Pin #	Name	Description
1	VCC1	DC supply voltage, connect to the RF stages' collector to which APT/ET is applied (0.5V~3.5V)
2	RFIN	RF input
3	Vbat	DC supply voltage, connect to the bias circuitry with a fixed voltage (higher than 3.0V)
4	Vio	RFFE enable
5	Sdta	RFFE data
6	Sclk	RFFE clock
7	GND	Ground
8	NC	No connection
9	RFOUT	RF output
10	VCC2	DC supply voltage, connect to the RF stages' collector to which APT/ET is applied (0.5V~3.5V)

For product information and a complete list of distributors, please go to our web site:

[www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. All other brand and product names may be trademarks of their respective companies.

Data subject to change. Copyright © 2015 Avago Technologies. All Rights Reserved.

AV02-4861EN – 2015-03-24

**AVAGO**  
TECHNOLOGIES



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View ACPM-9417-TR2 on WIN SOURCE](#)

 [Broadcom Limited](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management