



**THE DATASHEET OF
ZTX1051ASTOA**



ZTX1051A

NPN SILICON PLANAR ME HIGH GAIN TRANSISTOR


ISSUE 3 – FEBRUARY 95

FEATURES


- * $B_{CEV}=150V$
- * Very Low Saturation Voltage
- * High Gain
- * Inherently Low Noise

APPLICATIONS

- * Emergency Lighting
- * Low Noise Audio

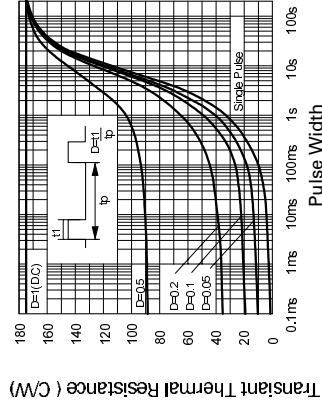

Transient Thermal Resistance

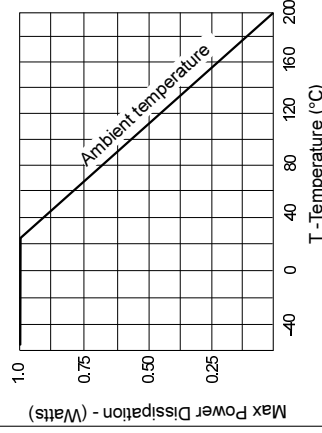

Derating curve

ABSOLUTE MAXIMUM RATINGS

PARAMETER
Collector-Base Voltage
Collector-Emitter Voltage
Emitter-Base Voltage
Peak Pulse Current
Continuous Collector Current
Base Current
Power Dissipation at $T_{amb}=25^{\circ}C$
Operating and Storage Temperature Range

SPICE PARAMETERS

*ZETEX ZTX1051A Spice model Last revision 16/12/94

```
*.MODEL ZTX1051A NPN IS=1.35E-12 NF=1.0 BF=600 IKF=5.0 VAF=120
+ ISE=0.6E-13 NE=1.25 NR=1.0 BR=150 IKR=3 VAR=15
+ ISC=1.0E-10 NC=1.7 RB=0.1 RE=0.023 RC=0.010
+ CJC=90.36E-12 CJE=547.5E-12 MJC=0.385 MJE=0.357
+ VJC=0.5 VJE=0.741 TF=600E-12 TR=8E-9
*
```

© 1995 ZETEX PLC

The copyright in this model and the design embodied belong to Zetex PLC ("Zetex"). It is supplied free of charge by Zetex for the purpose of research and design and may be used or copied intact (including this notice) for that purpose only. All other rights are reserved. The model is believed accurate but no condition or warranty as to its merchantability or fitness for purpose is given and no liability in respect of any use is accepted by Zetex PLC, its distributors or agents.



Zetex plc.
Fields New Road, Chadderton, Oldham, OL9-8NP, United Kingdom.
Telephone: (44)161-627 5105 (Sales), (44)161-627 4963 (General Enquiries)
Facsimile: (44)161-627 5467

Zetex GmbH
Streifeldstraße 19
D-81673 München
Telefon: (49) 89 45 49 49 0
Fax: (49) 89 45 49 49 49

Zetex Inc.
3510 Metroplaza, Tower 2
Hing Fong Road, Kwai Fong
Telephone: (852) 26100 611
Fax: (852) 24250 494

These are supported by
agents and distributors in
major countries world-wide
© Zetex plc 1995

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.




ZTX1051A

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	150	190		V	$I_C = 100\mu\text{A}$
Collector-Emitter Breakdown Voltage	V_{CES}	150	190		V	$I_C = 100\mu\text{A}$
Collector-Emitter Breakdown Voltage	V_{CEO}	40	60		V	$I_C = 10\text{mA}$
Collector-Emitter Breakdown Voltage	V_{CEV}	150	190		V	$I_C = 100\mu\text{A}$, $V_{EB} = 1\text{V}$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	5	8.8		V	$I_E = 100\mu\text{A}$
Collector Cut-Off Current	I_{CBO}		0.3	10	nA	$V_{CB} = 120\text{V}$
Emitter Cut-Off Current	I_{EBO}		0.3	10	nA	$V_{EB} = 4\text{V}$
Collector Emitter Cut-Off Current	I_{CES}		0.3	10	nA	$V_{CES} = 120\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		17 75 165	25 110 210	mV	$I_C = 0.2\text{A}$, $I_B = 10\text{mA}^*$ $I_C = 1\text{A}$, $I_B = 10\text{mA}^*$ $I_C = 4\text{A}$, $I_B = 100\text{mA}^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		920	1000	mV	$I_C = 4\text{A}$, $I_B = 100\text{mA}^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$		825	950	mV	$I_C = 4\text{A}$, $V_{CE} = 2\text{V}^*$
Static Forward Current Transfer Ratio	h_{FE}	290 300 190 45	440 450 310 70	1200		$I_C = 10\text{mA}$, $V_{CE} = 2\text{V}^*$ $I_C = 1\text{A}$, $V_{CE} = 2\text{V}^*$ $I_C = 4\text{A}$, $V_{CE} = 2\text{V}^*$ $I_C = 10\text{A}$, $V_{CE} = 2\text{V}^*$
Transition Frequency	f_T		155		MHz	$I_C = 50\text{mA}$, $V_{CE} = 10\text{V}$ $f = 100\text{MHz}$
Output Capacitance	C_{obo}		27	40	pF	$V_{CB} = 10\text{V}$, $f = 1\text{MHz}$
Switching Times	t_{on}		100		ns	$I_C = 4\text{A}$, $I_B = 40\text{mA}$, $V_{CC} = 10\text{V}$
	t_{off}		300		ns	$I_C = 4\text{A}$, $I_B = \pm 40\text{mA}$, $V_{CC} = 10\text{V}$

* Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$

TYPICAL

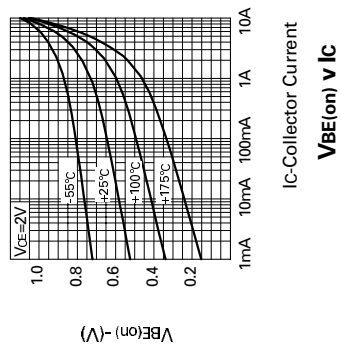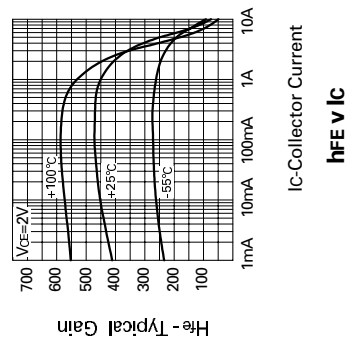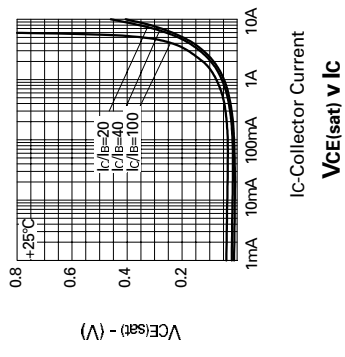


ZTX1051A

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).


PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	150	190		V	$I_C = 100\mu\text{A}$
Collector-Emitter Breakdown Voltage	V_{CES}	150	190		V	$I_C = 100\mu\text{A}$
Collector-Emitter Breakdown Voltage	V_{CEO}	40	60		V	$I_C = 10\text{mA}$
Collector-Emitter Breakdown Voltage	V_{CEV}	150	190		V	$I_C = 100\mu\text{A}$, $V_{EB} = 1\text{V}$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	5	8.8		V	$I_E = 100\mu\text{A}$
Collector Cut-Off Current	I_{CBO}		0.3	10	nA	$V_{CB} = 120\text{V}$
Emitter Cut-Off Current	I_{EBO}		0.3	10	nA	$V_{EB} = 4\text{V}$
Collector Emitter Cut-Off Current	I_{CES}		0.3	10	nA	$V_{CES} = 120\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		17 75 165	25 110 210	mV	$I_C = 0.2\text{A}$, $I_B = 10\text{mA}^*$ $I_C = 1\text{A}$, $I_B = 10\text{mA}^*$ $I_C = 4\text{A}$, $I_B = 100\text{mA}^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		920	1000	mV	$I_C = 4\text{A}$, $I_B = 100\text{mA}^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$		825	950	mV	$I_C = 4\text{A}$, $V_{CE} = 2\text{V}^*$
Static Forward Current Transfer Ratio	h_{FE}	290 300 190 45	440 450 310 70	1200		$I_C = 10\text{mA}$, $V_{CE} = 2\text{V}^*$ $I_C = 1\text{A}$, $V_{CE} = 2\text{V}^*$ $I_C = 4\text{A}$, $V_{CE} = 2\text{V}^*$ $I_C = 10\text{A}$, $V_{CE} = 2\text{V}^*$
Transition Frequency	f_T		155		MHz	$I_C = 50\text{mA}$, $V_{CE} = 10\text{V}$ $f = 100\text{MHz}$
Output Capacitance	C_{obo}		27	40	pF	$V_{CB} = 10\text{V}$, $f = 1\text{MHz}$
Switching Times	t_{on}		100		ns	$I_C = 4\text{A}$, $I_B = 40\text{mA}$, $V_{CC} = 10\text{V}$
	t_{off}		300		ns	$I_C = 4\text{A}$, $I_B = \pm 40\text{mA}$, $V_{CC} = 10\text{V}$

* Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$


TYPICAL

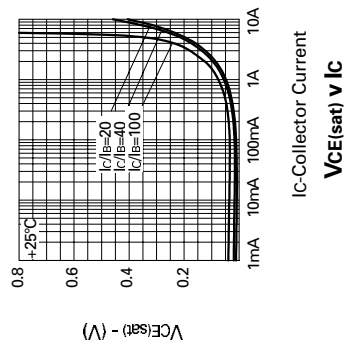

I_C -Collector Current
 $V_{CE(sat)}$ v I_C

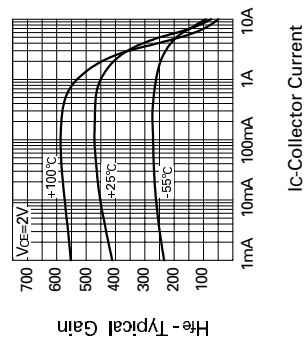

I_C -Collector Current
 h_{FE} v I_C

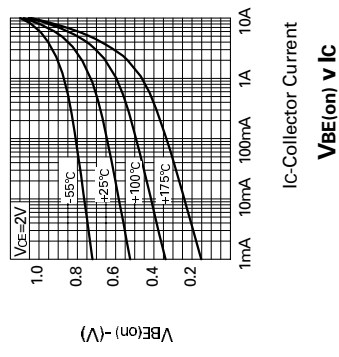

I_C -Collector Current
 $V_{BE(on)}$ v I_C

ZTX1051A

NPN SILICON PLANAR MEDIUM GAIN TRANSISTOR


ISSUE 3 – FEBRUARY 95

FEATURES


- * $B_{CEV}=150V$
- * Very Low Saturation Voltage
- * High Gain
- * Inherently Low Noise

APPLICATIONS

- * Emergency Lighting
- * Low Noise Audio

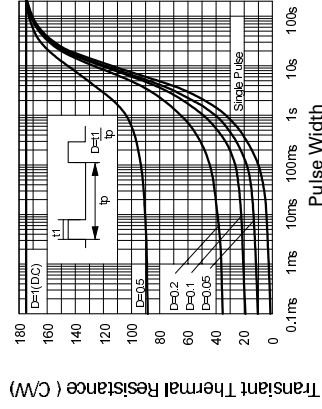

Transient Thermal Resistance

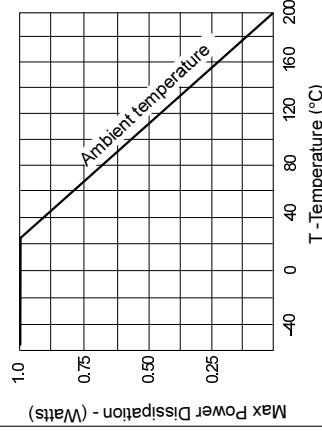

Derating curve

ABSOLUTE MAXIMUM RATINGS

PARAMETER
Collector-Base Voltage
Collector-Emitter Voltage
Emitter-Base Voltage
Peak Pulse Current
Continuous Collector Current
Base Current
Power Dissipation at $T_{amb}=25^{\circ}C$
Operating and Storage Temperature Range

SPICE PARAMETERS

*ZETEX ZTX1051A Spice model Last revision 16/12/94

```
*.MODEL ZTX1051A NPN IS=1.35E-12 NF=1.0 BF=600 IKF=5.0 VAF=120
+ ISE=0.6E-13 NE=1.25 NR=1.0 BR=150 IKR=3 VAR=15
+ ISC=1.0E-10 NC=1.7 RB=0.1 RE=0.023 RC=0.010
+ CJC=90.36E-12 CJE=547.5E-12 MJC=0.385 MJE=0.357
+ VJC=0.5 VJE=0.741 TF=600E-12 TR=8E-9
*
```

© 1995 ZETEX PLC

The copyright in this model and the design embodied belong to Zetex PLC ("Zetex"). It is supplied free of charge by Zetex for the purpose of research and design and may be used or copied intact (including this notice) for that purpose only. All other rights are reserved. The model is believed accurate but no condition or warranty as to its merchantability or fitness for purpose is given and no liability in respect of any use is accepted by Zetex PLC, its distributors or agents.



Zetex plc.
Fields New Road, Chadderton, Oldham, OL9-8NP, United Kingdom.
Telephone: (44)161-627 5105 (Sales), (44)161-627 4963 (General Enquiries)
Facsimile: (44)161-627 5467

Zetex GmbH
Streifeldstraße 19
D-81673 München
Telefon: (49) 89 45 49 49 0
Fax: (49) 89 45 49 49 49



Zetex Inc.
3510 Metroplaza, Tower 2
Hing Fong Road, Kwai Fong
Telephone: (852) 26100 611
Fax: (852) 24250 494

These are supported by agents and distributors in major countries world-wide
© Zetex plc 1995

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View ZTX1051ASTOA on WIN SOURCE](#)
-  [Diodes Incorporated Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management