



**THE DATASHEET OF  
ADT2-162T+**



Surface Mount

# RF Transformer

## ADT2-162T+

50Ω 20 to 1600 MHz

### The Big Deal

- 1W RF power handling
- Low unbalance, 0.4 dB, 3°
- Small size, 0.27 x 0.31 x 0.22"



CASE STYLE: CD636

### Product Overview

Mini-Circuits' ADT2-162T+ is a surface-mount balanced-to-balanced transformer with a secondary/primary impedance ratio of 2:1. This model covers the 20 to 1600 MHz band with low insertion loss (1.2 dB typ.) as well as low phase unbalance (3°) and amplitude unbalance (0.4 dB). The unit comes enclosed in a miniature, leadless plastic package measuring just 0.27 x 0.31 x 0.22", ideal for dense circuit board layouts.

### Key Features

Feature	Advantages
Wideband, 20 to 1600 MHz	Supports a wide range of applications including VHF/UHF, cellular, PCS and more.
Low insertion loss, 1.2 dB typ.	Good transmission of signal power from input to output.
1W RF power handling	Supports a wide range of power requirements.
Low phase and amplitude unbalance, 3°, 0.4 dB	Low phase and amplitude unbalance can improve a system's electromagnetic compatibility by rejecting unwanted common-mode noise
Small footprint, 0.27 x 0.31 x 0.22"	Accommodates tight space requirements for dense PCB layouts.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Surface Mount RF Transformer

50Ω 20 to 1600 MHz

## ADT2-162T+



Generic photo used for illustration purposes only

CASE STYLE: CD636

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel  
at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200
13"	500, 1000

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	1.0W

Permanent damage may occur if any of these limits are exceeded.


### Pin Connections

PRIMARY DOT	3
PRIMARY	1
SECONDARY DOT	6
SECONDARY	4
SECONDARY CT	5
NOT USED	2

### Outline Drawing

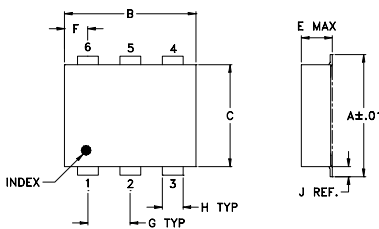

### PCB Land Pattern




Suggested Layout,  
Tolerance to be within ±.002

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.162	.055	.100
6.91	7.87	5.59	2.54	4.11	1.40	2.54
H	J	K	L	wt		
.030	.026	.065	.300	grams		
0.76	0.66	1.65	7.62	0.25		

Demo Board MCL P/N: TB-430+

### Config. P1



### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- leaded surface mount
- wideband frequency 20-1600 MHz
- excellent amplitude balance, 0.4 dB typ. and phase unbalance, 3 deg. typ.

### Applications

- VHF/UHF
- balanced amplifiers
- info structure
- A/D and D/A converter
- cellular





### Transformer Electrical Specifications@25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (secondary / primary)			2		
Frequency Range		20		1600	MHz
Insertion Loss* (average)	50 - 1250	—	0.5	1.0	dB
	25 - 1400	—	1.2	2.0	
	20 - 1600	—	2.0	3.0	
Amplitude Unbalance ±	50 - 1250	—	0.4	0.75	dB
	25 - 1400	—	0.5	0.85	
	20 - 1600	—	0.6	0.95	
Phase Unbalance ±	50 - 1250	—	2	4	Degree
	25 - 1400	—	2.5	5	
	20 - 1600	—	3.0	7	
Input Return Loss	20-1600	—	12	—	dB
Common mode rejection	20-1250	20	25	—	dB
	1250-1600	18	22	—	

\* Insertion Loss is referenced to mid-band loss, 1.0 dB typ.

### Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
20	2.47	4.74	0.35	0.06
25	1.92	5.94	0.35	0.03
50	1.07	9.79	0.35	0.07
100	0.88	11.86	0.36	0.25
200	0.96	10.98	0.33	0.41
600	1.51	7.53	0.10	0.42
1000	1.15	11.44	0.16	0.70
1218	1.02	27.23	0.06	1.96
1400	1.47	13.83	0.11	3.70
1600	2.55	7.63	0.01	6.06

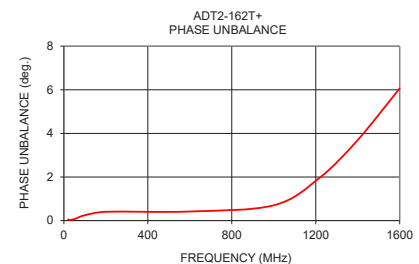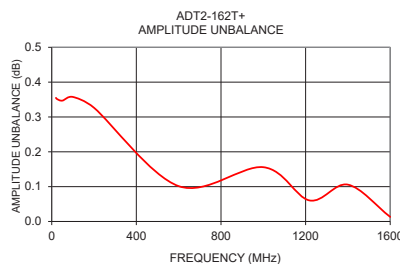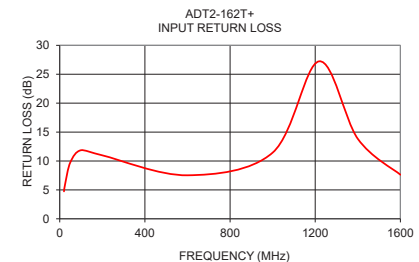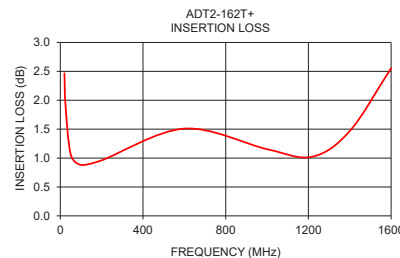

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View ADT2-162T+ on WIN SOURCE](#)

 [Mini-Circuits Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management