




**THE DATASHEET OF  
BAS3005S02LRHE6327XTSA1**



**Low VF Schottky Diode**

- Reverse voltage: 30 V
- Forward current: 0.5 A
- Low forward voltage and smallest package form factor (1.0 x 0.6 x < 0.4 mm) for mobile phone battery charger application
- Pb-free (RoHS compliant) package


**BAS3005S-02LRH**


Type	Package	Configuration	Marking
BAS3005S-02LRH	TSLP-2-17	single	5A

**Maximum Ratings at  $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified**

Parameter	Symbol	Value	Unit
Diode reverse voltage <sup>1)</sup>	$V_R$	30	V
Forward current <sup>1)</sup> , $T_S \leq 132\text{ }^\circ\text{C}$	$I_F$	0.5	A
Non-repetitive peak surge forward current ( $t \leq 10\text{ ms}$ )	$I_{FSM}$	2	
Junction temperature	$T_j$	150	$^\circ\text{C}$
Operating temperature range	$T_{op}$	-55 ... 150	
Storage temperature	$T_{stg}$	-65 ... 150	

**Thermal Resistance**

Junction - soldering point <sup>2)</sup>	$R_{thJS}$	$\leq 60$	K/W
--	------------	-----------	-----

<sup>1</sup> For  $T_A > 25\text{ }^\circ\text{C}$  the derating of  $V_R$  and  $I_F$  has to be considered.

<sup>2</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance


**Electrical Characteristics at  $T_A = 25^\circ\text{C}$ , unless otherwise specified**

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>DC Characteristics</b>					
Reverse current <sup>1)</sup> $V_R = 5\text{ V}$ $V_R = 30\text{ V}$	$I_R$	-	-	15 300	$\mu\text{A}$
Forward voltage <sup>1)</sup> $I_F = 0.1\text{ mA}$ $I_F = 10\text{ mA}$ $I_F = 200\text{ mA}$ $I_F = 500\text{ mA}$	$V_F$	-	140 260 370 450	190 310 420 500	mV
<b>AC Characteristics</b>					
Diode capacitance $V_R = 5\text{ V}, f = 1\text{ MHz}$	$C_T$	-	10	15	pF

<sup>1)</sup>Pulsed test:  $t_p = 300\ \mu\text{s}; D = 0.01$


**Diode capacitance  $C_T = f(V_R)$**

$f = 1\text{MHz}$

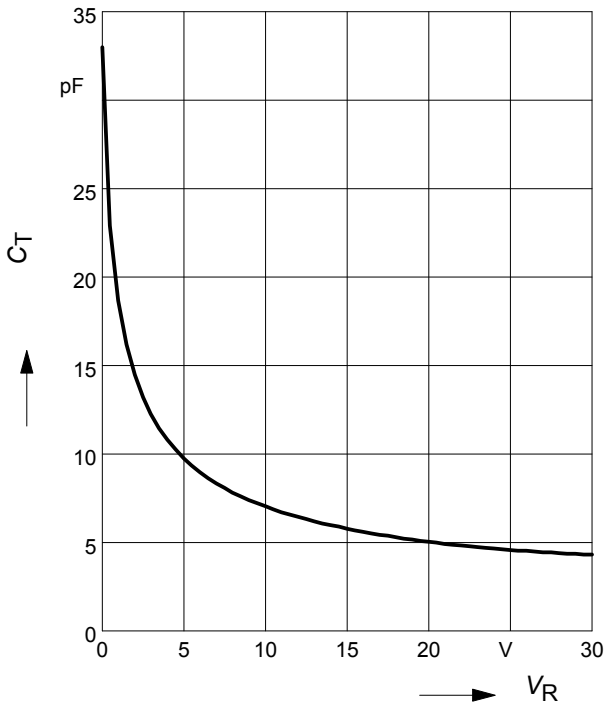


**Reverse current  $I_R = f(T_A)$**

$V_R = \text{Parameter}$

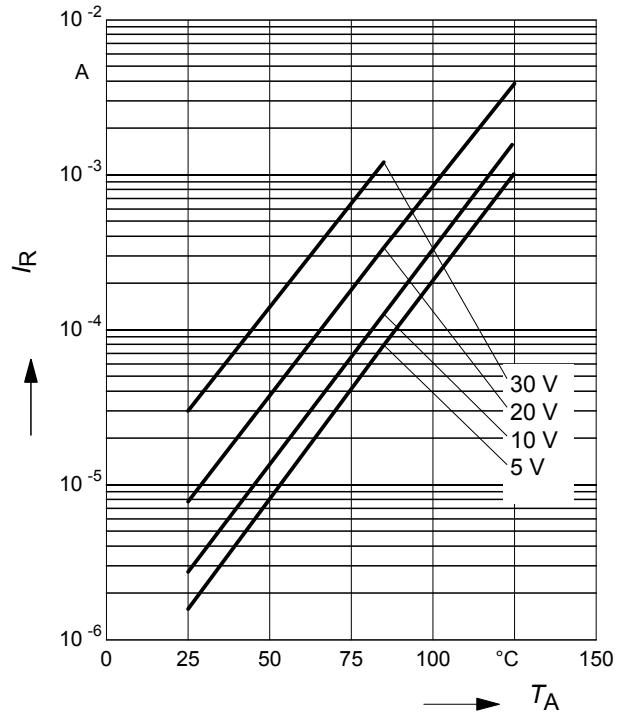


**Reverse current  $I_R = f(V_R)$**

$T_A = \text{Parameter}$

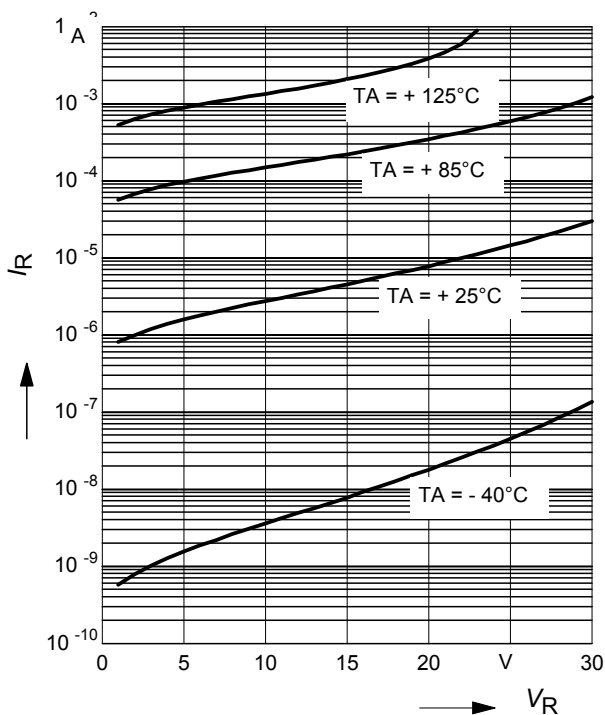


**Forward Voltage  $V_F = f(T_A)$**

$I_F = \text{Parameter}$

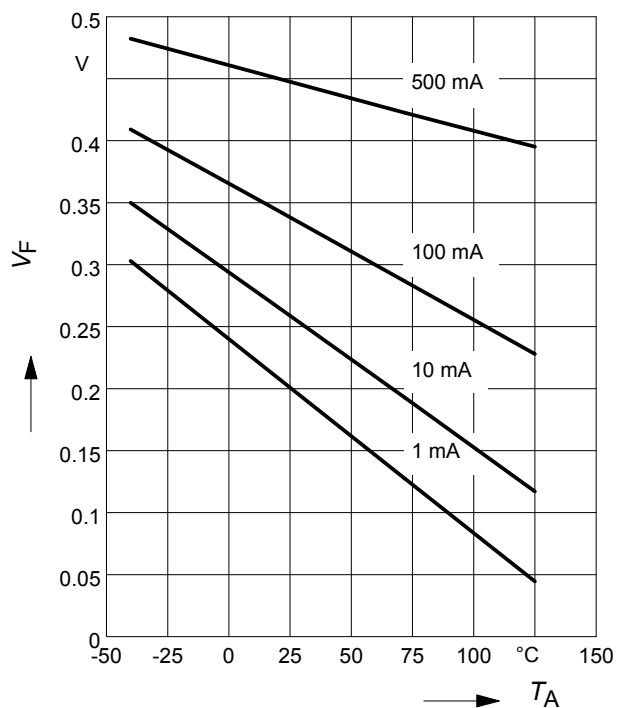


**Forward current  $I_F = f(V_F)$**

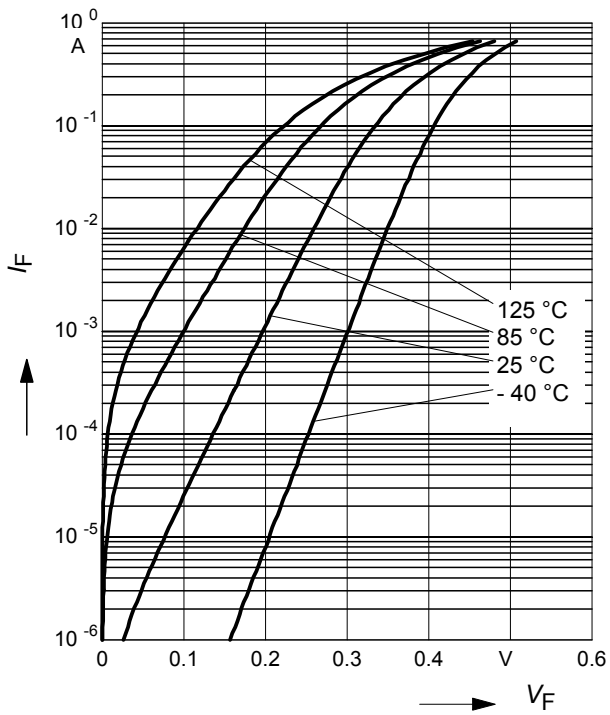

**Permissible Reverse voltage  $V_R = f(T_A)$**


$t_p$  = Parameter, Duty cycle < 0.01

Device mounted on PCB with  $R_{th} = 160$  K/W

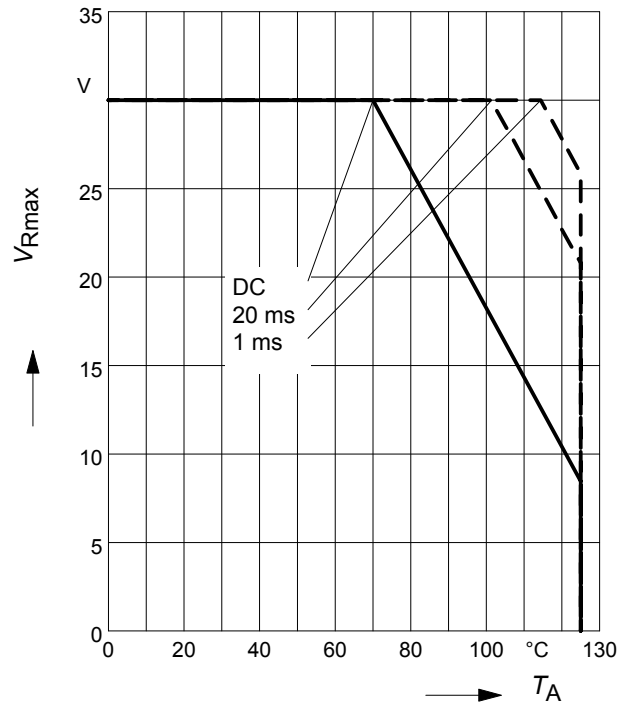


**Forward current  $I_F = f(T_S)$**

BAS3005S-02LRH

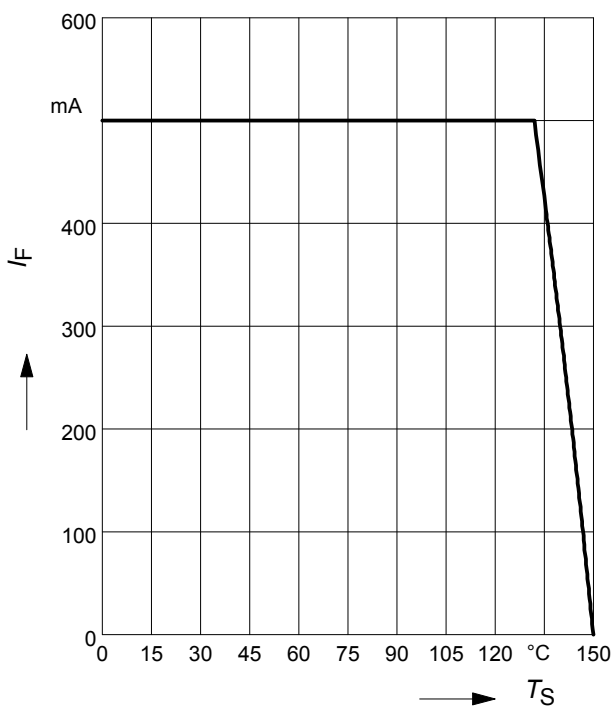


### Package Outline

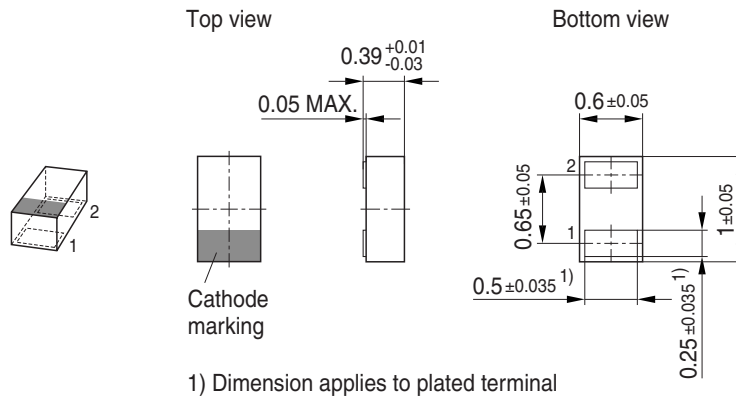


### Foot Print

For board assembly information please refer to Infineon website "Packages"

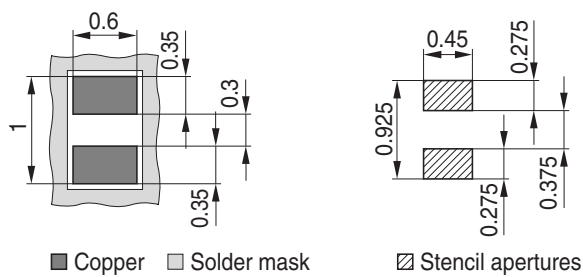


### Marking Layout (Example)

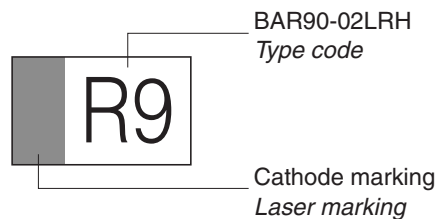

### Standard Packing

Reel  $\varnothing$ 180 mm = 15.000 Pieces/Reel  
 Reel  $\varnothing$ 330 mm = 50.000 Pieces/Reel (optional)

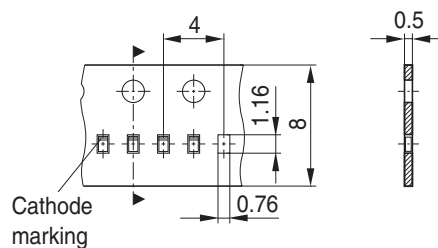

**Edition 2009-11-16**

**Published by  
Infineon Technologies AG  
81726 Munich, Germany**

**© 2009 Infineon Technologies AG  
All Rights Reserved.**

### **Legal Disclaimer**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

### **Information**

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([<www.infineon.com>](http://www.infineon.com)).

### **Warnings**

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View BAS3005S02LRHE6327XTSA1 on WIN SOURCE](#)
- ⊖ [Infineon Technologies Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management