



THE DATASHEET OF STEVAL-PSQ001V1





STEVAL-PSQ001V1

Power management for CPU, FPGA and memory based on the PM6680A


Data Brief

Features

- Input: 5 - 36 VDC, surge protection
- Output voltages:
 - Output1 (V_{core}) selectable from: 0.9, 1.0, 1.2, 1.5, 1.8 or 2.5 V, 4 A continuously (6 A peak), tolerance: 3%
 - Output2 ($V_{\text{I/O}}$) selectable from: 1.0, 1.2, 1.5, 1.8, 2.5 V or 3.3 V, 2 A continuously (3 A peak), tolerance: 3%
 - Output3 V_{sys} : 3.3 V 0.4 A (0.8 A peak), tolerance: 4%
 - Output3 V_{aux} : 2.5 V, 0.4 A, tolerance: 2%
- Analog 5: 5 V, 0.8 A, tolerance: 4%
- Analog 3.3 V: 3.3 V, 0.15 A, tolerance: 2%

Description

The main purpose of this evaluation board is to show basic principles used for design of the power supply and to give users a working prototype for testing and daily use. The trend in recent years in the supply of MCUs, CPUs, memories, FPGAs etc. is to reduce the supply voltage, increase supply current and provide various voltage levels for different devices in one platform. A typical example of this is the FPGA. FPGAs contain core parts which operate with low level voltage, interface parts placed between the core and the output, system parts, etc. It is important to note that each family of parts has a slightly different voltage level and the trend is toward decreasing voltage for each new family. The lowest operating voltage currently is 1 V, and this can be expected to drop to 0.9 V or 0.8 V in the near future. The situation is similar with other parts of digital solutions. Typically, the main CPU, memory, and interfaces require different supply voltage levels. Low operating voltage also bring another challenge - transient. Digital devices are typically sensitive to voltage level. If voltage drops below or crosses over established limits, the device is

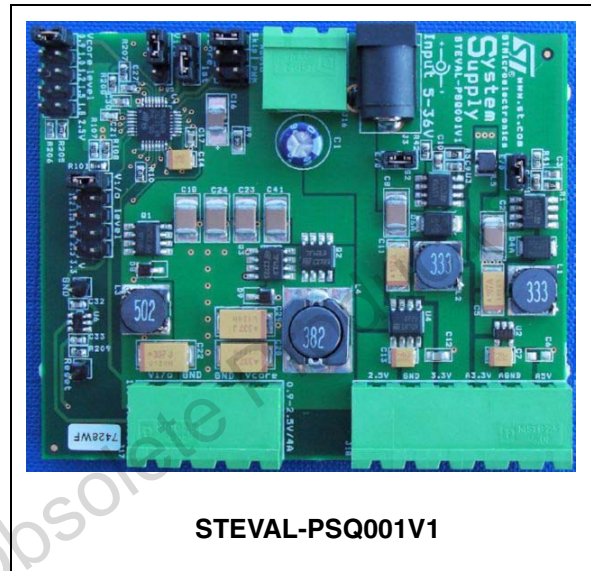


STEVAL-PSQ001V1

reset. This limit is typically ± 3 or 5 %. On the other hand, digital device consumption can change very fast (approx. several amps in several hundred nanoseconds). The power supply must be capable of reacting very quickly with a minimum of over/under voltage, especially in cases where very low voltage output is required. There is additional stress placed on power supplies in digital applications for industrial use. The industrial standard bus is 24 V, but this voltage fluctuates and the maximum required input voltage level can be up to 36 V. Additional surge protection is also mandatory for power supply input in industrial applications. The purpose of this evaluation board is to address all of required parameters outlined above. This means satisfying industrial input requirements (operating voltage of up to 36 V) and generating several output voltages for middle power applications (up to several amps). The main output voltage level can be set easily.

1 Circuit schematic

Figure 1. Schematic

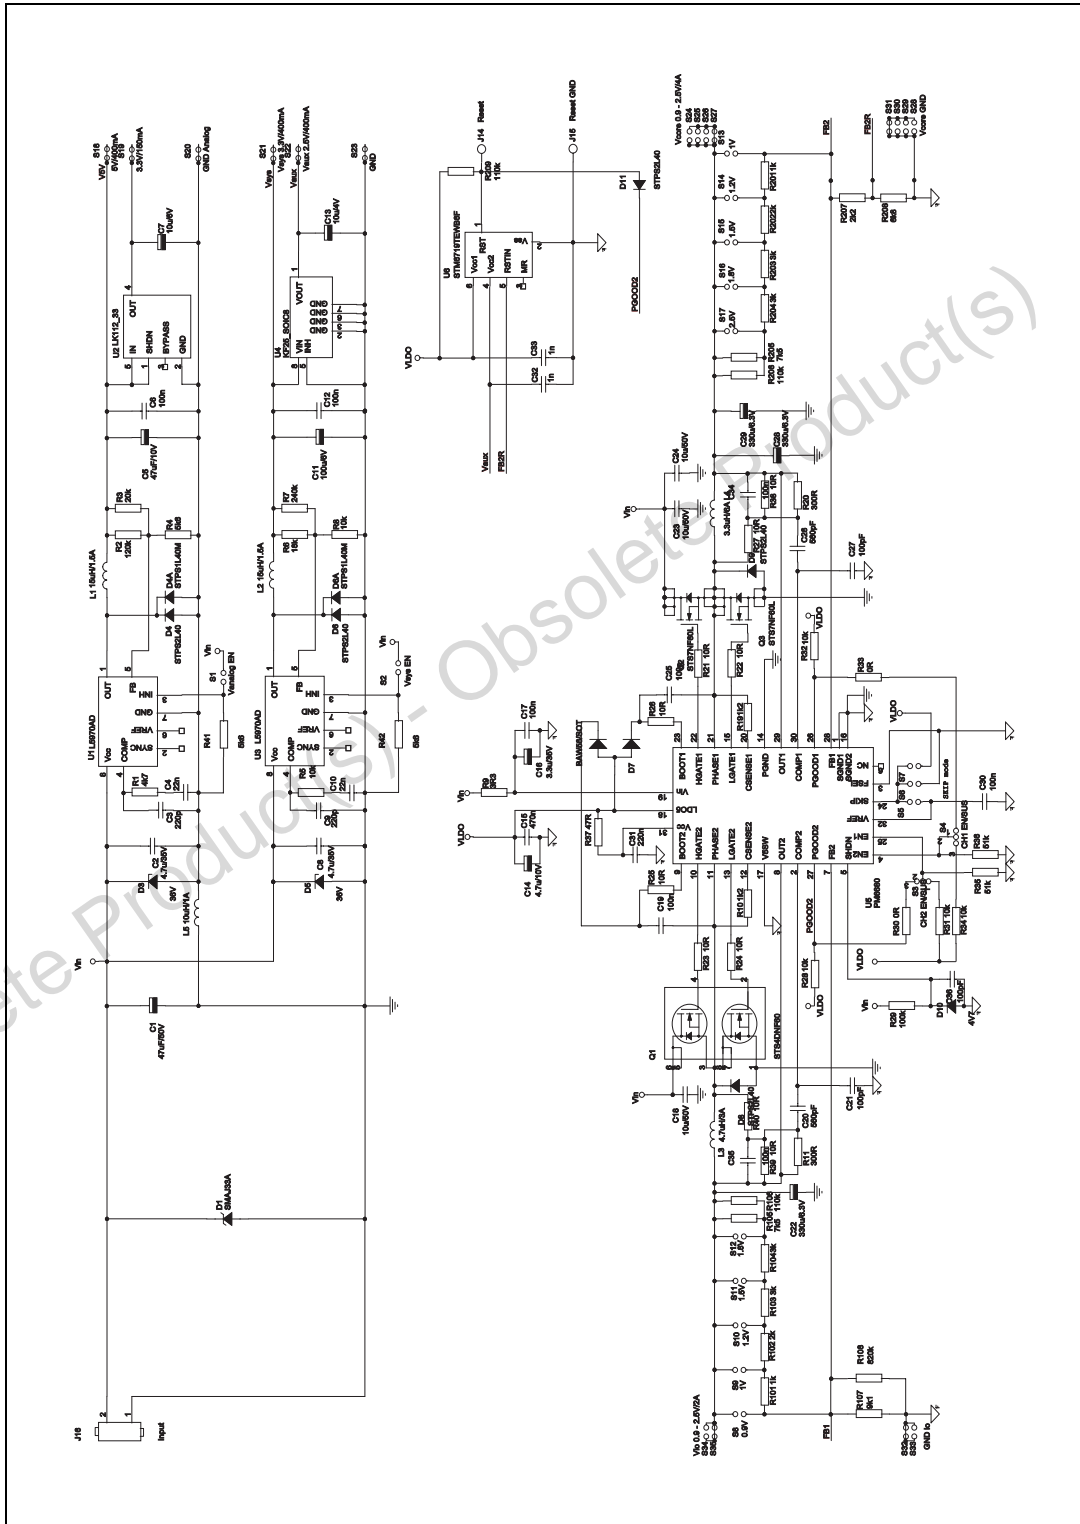

2 Revision history

Table 1. Document revision history

Date	Revision	Changes
18-Feb-2008	1	Initial release.

Obsolete Product(s) - Obsolete Product(s)

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2008 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View STEVAL-PSQ001V1 on WIN SOURCE](#)
- ⊖ [STMicroelectronics Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management