




# THE DATASHEET OF STEVAL-ISA143V1



## 12 V - 150 W resonant converter with synchronous rectification using the L6563H, L6699 and SRK2000

Data brief

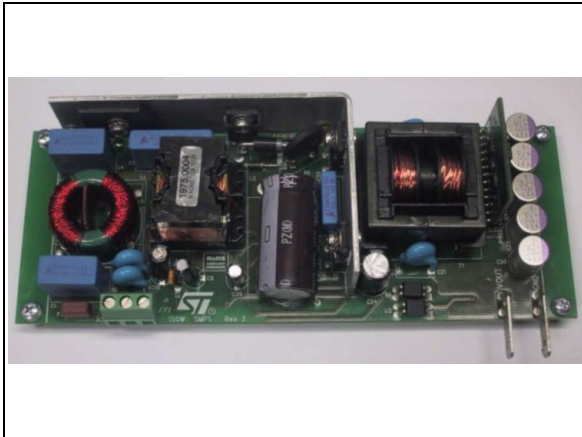

- Efficiency at nominal load: > 91% at 115 VAC
- EMI: in accordance with EN55022 Class-B
- Safety: in accordance with EN60950
- Dimensions: 65 x 154 mm, maximum component height = 28 mm
- PCB: double-sided, 70  $\mu$ m, FR-4, mixed PTH/SMT
- RoHS compliant

### Features

- Input mains range: 90 - 264 VAC, 45 - 65 Hz
- Output voltage: 12 V at 12.5 A continuous operation
- Mains harmonics: in accordance with EN61000-3-2 Class-D or JEITA-MITI Class-D
- No load consumption: < 0.15 W according to European CoC Tier 2 for external power supplies
- Minimum four points average efficiency in active mode: > 89% according to European CoC Tier 2 for external power supplies
- Minimum efficiency in active mode at 10% load of full rated output current: > 79% according to European CoC Tier 2 for external power supplies
- Light load efficiency: complies with ErP Lot 6 Tier 2 (> 50% @ 250 mW)

# 1 Description

The STEVAL-ISA143V1 system evaluation board is made up of two stages: a front-end PFC using the L6563H, an LLC resonant converter based on the L6699 and the SRK2000, controlling the SR MOSFETs on the secondary side. The SR driver and the rectifier MOSFETs are mounted on a daughterboard.

The L6563H is a current mode PFC controller operating in transition mode and implements a high voltage startup source to power on the converter.

The L6699 integrates all the functions necessary to properly control the resonant converter with a 50% fixed duty cycle and work with variable frequency.

The output rectification is managed by the SRK2000, an SR driver dedicated to LLC resonant topology.

The PFC stage works as pre-regulator and powers the resonant stage with a constant voltage of 400 V. The downstream converter operates only if the PFC is on and regulating. In this way, the resonant stage can be optimized for a narrow input voltage range.

The L6699's LINE pin (pin 7) is dedicated to this function. It is used to prevent the resonant converter from working with too low an input voltage, which can cause incorrect capacitive mode operation. If the bulk voltage (PFC output) is below 380 V, the resonant startup is not allowed. The L6699 LINE pin internal comparator has a hysteresis allowing the turn-on and turn-off voltage to be independently set. The turn-off threshold is set to 300 V, allowing the resonant stage to operate in case of mains sag and consequent PFC output dip.

The transformer uses the integrated magnetic approach, incorporating resonant series inductance. Therefore, no external, additional coil is needed for the resonance. The transformer configuration chosen for the secondary winding is center tap.


On the secondary side, the SRK2000 core function switches on each synchronous rectifier MOSFET whenever the corresponding transformer half-winding starts conducting (i.e. when the MOSFET body diode starts conducting) and then switches it off when the flowing current approaches zero. For this purpose, the IC is provided with two pins (DVS1 and DVS2) sensing the MOSFETs' drain voltage level.

The SRK2000 automatically detects light load operation and enters Sleep mode, disabling MOSFET driving and decreasing its own consumption. This function allows greater power saving at light load compared to benchmark SR solutions.

In order to decrease the output capacitor size, aluminum solid capacitors with very low ESR were favored over standard electrolytic ones. Therefore, high frequency output voltage ripple is limited and output LC filter is not required. This choice allows saving of output inductor power dissipation which can be significant in high output current applications such as this.

# 2 Schematic diagram

Figure 1. STEVAL-ISA143V1 circuit schematic

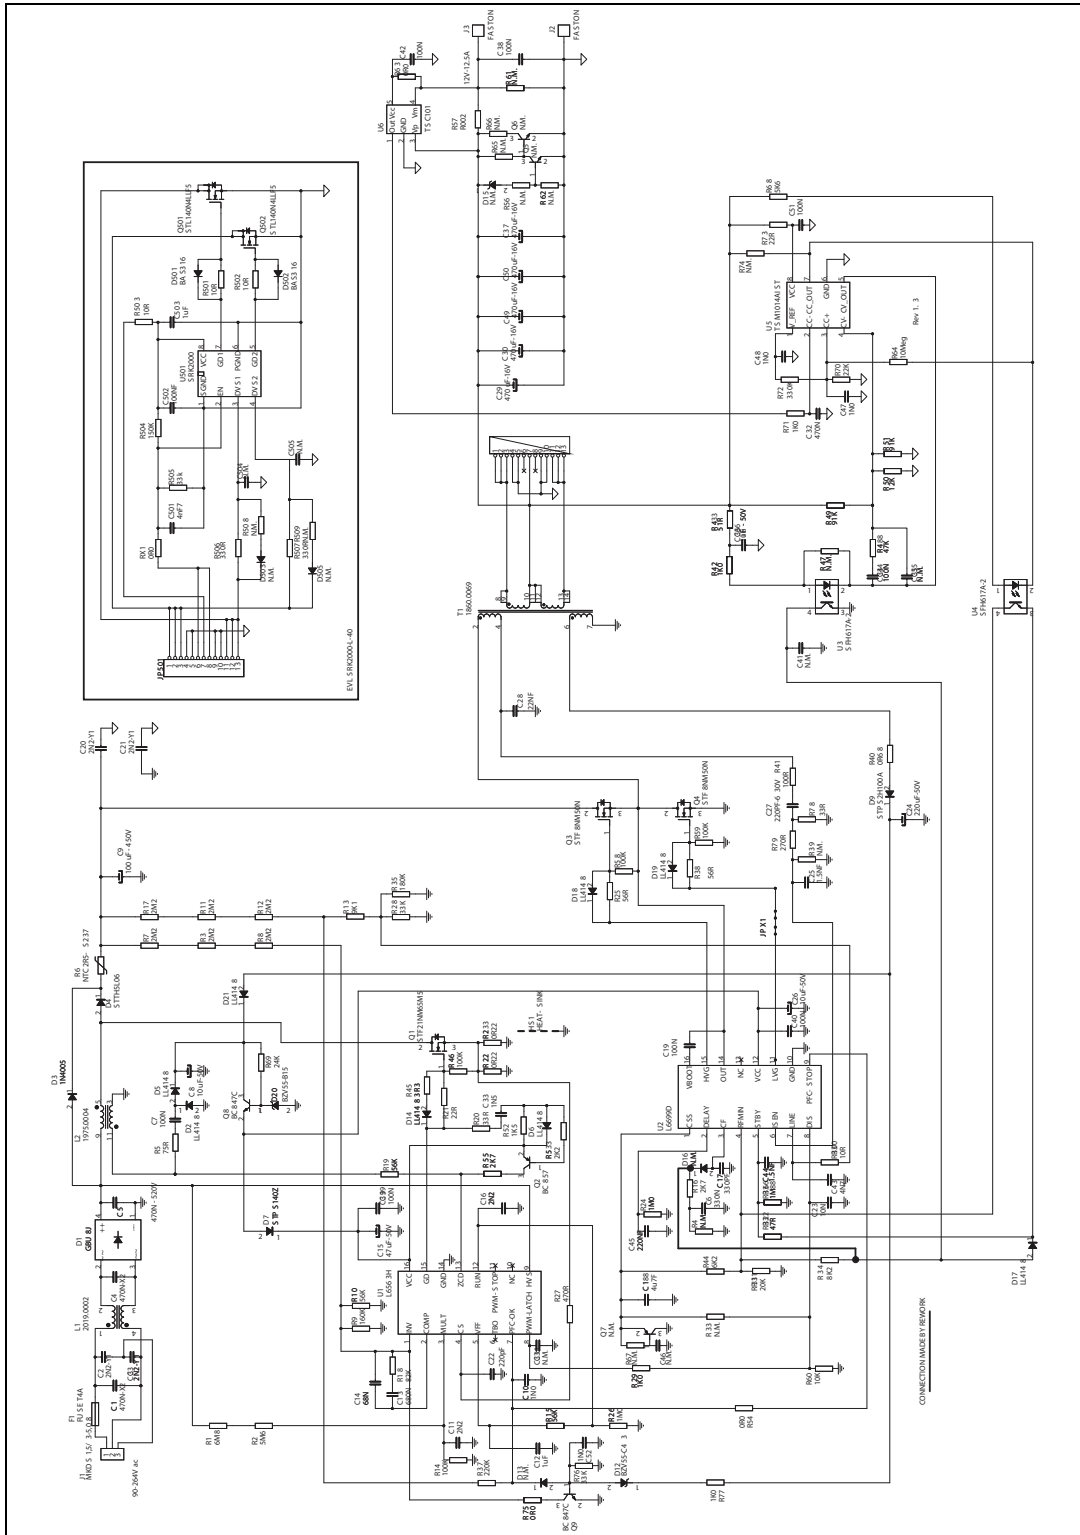

### 3 Revision history

Table 1. Document revision history

Date	Revision	Changes
15-Jan-2014	1	Initial release.
08-May-2014	2	Added new features.

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2014 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View STEVAL-ISA143V1 on WIN SOURCE](#)
- ⊖ [STMicroelectronics Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management