



THE DATASHEET OF STEVAL-ISV005V2



240 W photovoltaic battery charger based on the SPV1020

Data brief

Features

- PWM mode DC-DC boost converter
- Duty cycle controlled by MPPT algorithm with 0.2% accuracy
- Operating voltage range 0-40 V
- Overvoltage, overcurrent, overtemperature protections
- Built in soft-start
- Up to 98% efficiency
- Automatic transition to burst mode for improved efficiency at low solar radiation
- SPI interface
- Output current limitation
- RoHS compliant


Description

The STEVAL-ISV005V2 demonstration board is mainly based on the SPV1020 device, a monolithic DC-DC boost converter designed to maximize the power generated by photovoltaic panels independently of temperature and amount of solar radiation.

The optimization of the power conversion is obtained with an embedded logic which performs the MPPT (max power point tracking) algorithm on the PV cells connected to the converter.

One or more converters can be housed in the connection box of the PV panels, replacing the bypass diodes. Since the maximum power point is locally computed, the efficiency at system level will be higher than that of conventional topologies, where the MPP is computed in the main centralized inverter.

For a cost-effective application solution and miniaturization requirements, the SPV1020 embeds the power MOSFETs for active switches and synchronous rectification, minimizing the number of external devices. Furthermore, the

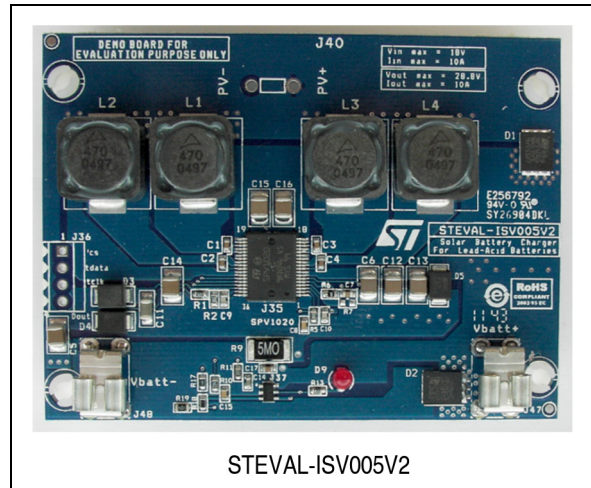

4-phase interleaved topology of the DC-DC converter renders unnecessary the use of electrolytic capacitors, which would severely limit the lifetime.

The SPV1020 works at fixed frequency in PWM mode, where the duty cycle is controlled by the embedded logic running a “Perturb & Observe” MPPT algorithm. The switching frequency, internally generated and set by default at 100 kHz, can be tuned externally, while the duty cycle ranges from 5% to 90% with a step of 0.2%.


Safety of the application is guaranteed by stopping the drivers in case of output overvoltage or overtemperature.

The bypass diodes SPV1001N40 guarantee very high application efficiency even when the PV panel voltage is lower than the UVLO threshold of the SPV1020 (6.5 V) and the connection is in series consisting of two or more PV panels.

The SEA05 is connected to the output stage of the application and is used to implement the output current limitation (not available with the SPV1020 alone) through the current sensing resistors R9 and R10.

1 Circuit schematic

Figure 1. STEVAL-ISV005V2 circuit schematic

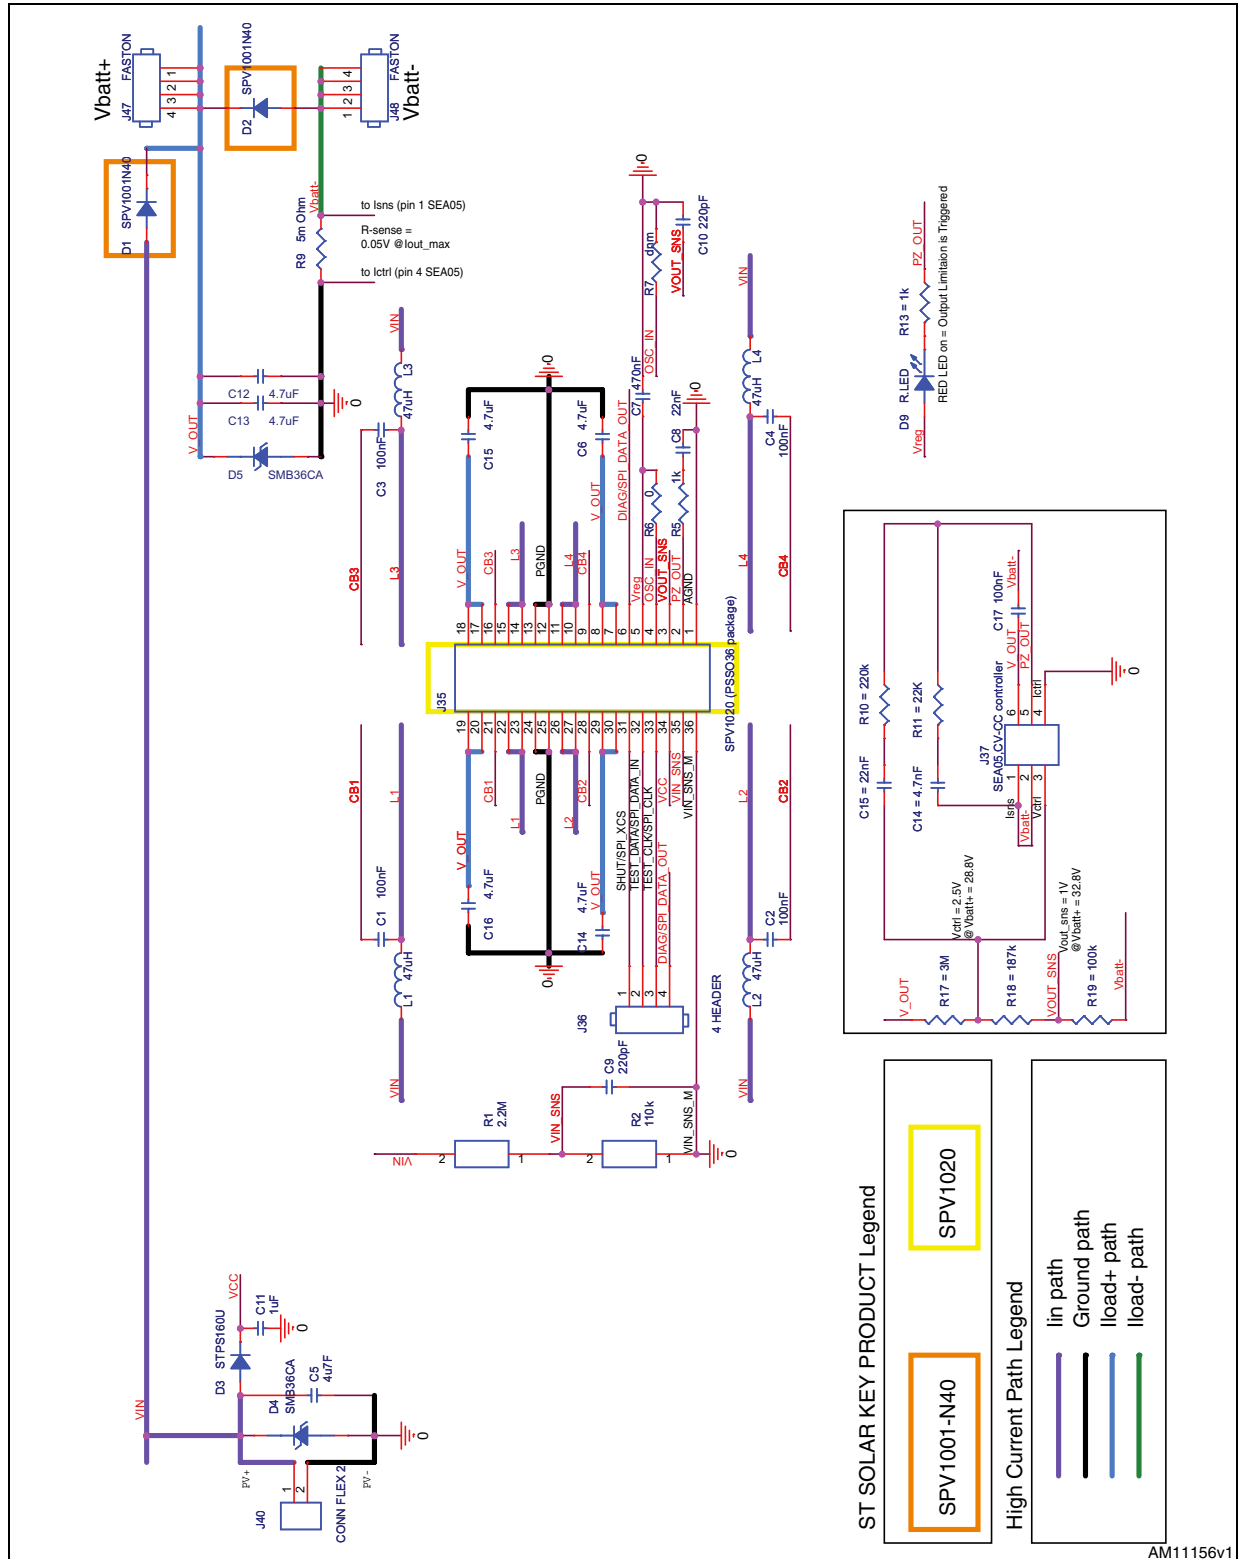

2 Revision history

Table 1. Document revision history

Date	Revision	Changes
03-Feb-2012	1	Initial release.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2012 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View STEVAL-ISV005V2 on WIN SOURCE](#)
- ⊖ [STMicroelectronics Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management