WINSOURCE ELECTRONICS

THE DATASHEET OF

RPI-0226

Photointerrupter, Ultraminiature SMD type

RPI-0226 Datasheet

●Applications

- DSC(Digital steal camera)
- DVC(Digital video camera)

●Outline

●Features

1) Ultraminiature middle size SMD type.
2) Gap 2.0mm.

●Dimensions (Unit : mm)

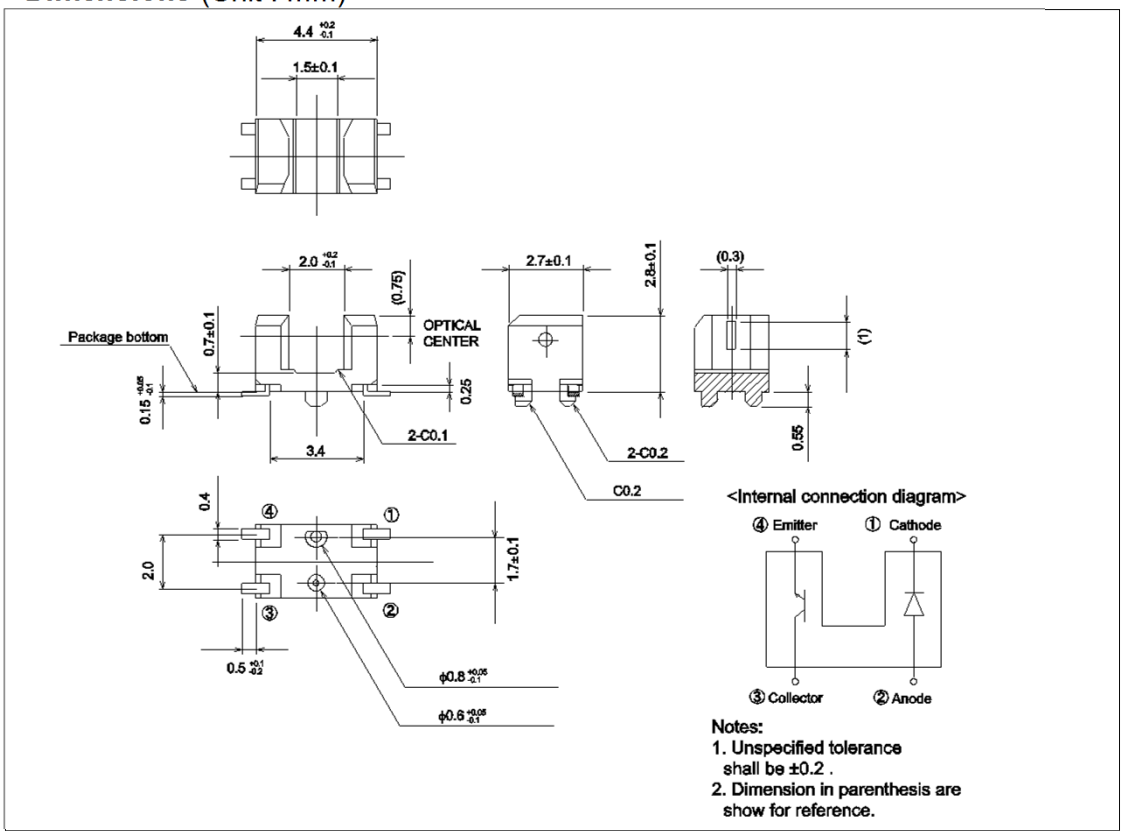

●Absolute maximum ratings (T_a = 25°C)

Parameter		Symbol	Value	Unit
Input (LED)	Forward current	I_F	50	mA
	Reverse voltage	V_R	5	V
	Power dissipation	P_D	80	mW
Output (photo-transistor)	Collector-emitter voltage	V_{CEO}	30	V
	Emitter-collector voltage	V_{ECO}	4.5	V
	Collector current	I_C	30	mA
	Collector power dissipation	P_C	80	mW
Operating temperature		T_{opr}	−30 to +85	°C
Storage temperature		T_{stg}	−40 to +85	°C

© 2015 ROHM Co., Ltd. All rights reserved.

●Electrical and optical characteristics (T_a = 25°C)

Parameter			Symbol	Conditions	Values			Unit
					Min.	Typ.	Max.	
Input characteristics	Forward voltage		V_F	I_F =50mA	-	1.8	2.3	V
	Reverse current		I_R	V_R =5V	-	-	10	μA
Output characteristics	Dark current		I_{CEO}	V_{CE}=10V	-	-	0.1	μA
	Peak sensitivity wavelength		λ_p	-	-	800	-	nm
Transfer characteristics	Collector current		I_C	V_{CE} =5V, I_F=5mA	0.1	-	-	mA
	Collector-emitter saturation voltage		$V_{CE(sat)}$	I_F =20mA, I_C=0.1mA	-	-	0.4	V
	Response time	Rise time	tr	V_{CC} =5V, I_F=0.1mA, R_L=1000Ω	-	50	150	μs
		Fall time	tf		-	50	150	μs
Infrared light emitter diode	Peak light emitting wavelength		λ_p	I_F =50mA * Non-coherent Infrared light emitting diode used.	-	850	-	nm
Photo transistor	Response time		tr·tf	V_{CC} =5V, I_C=1mA, R_L=1000Ω *This product is not designed to be protected against electromagnetic wave.	-	50	-	μs
	Maximum sensitivity wavelength		λ_p	-	-	800	-	nm

© 2015 ROHM Co., Ltd. All rights reserved.

●Electrical and optical characteristics curves

Fig.1 Relative Output Current vs.Distance (I)

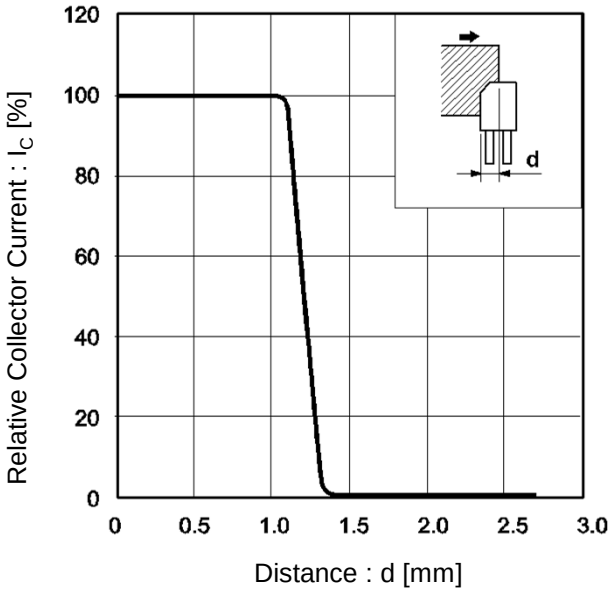

Fig.2 Relative Output Current vs.Distance (II)

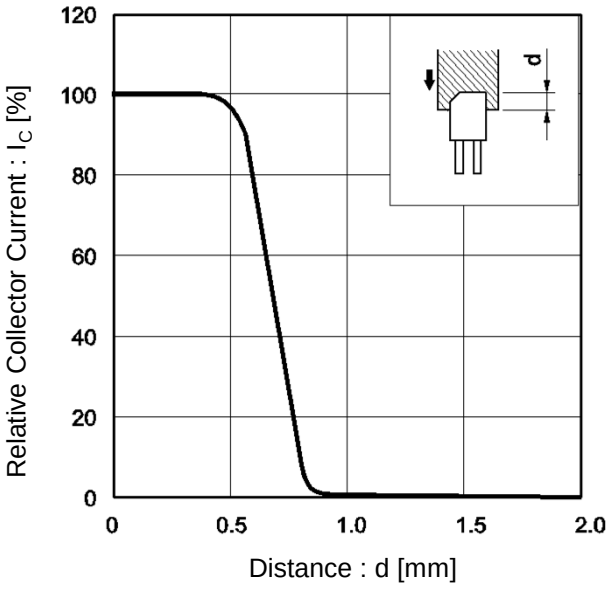

Fig.3 Forward Current Falloff

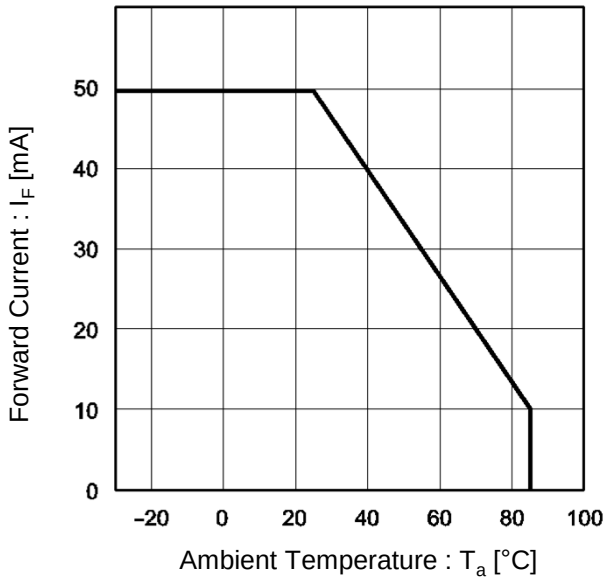

Fig.4 Power Dissipation / Collector Power Dissipation vs. Ambient Temperature

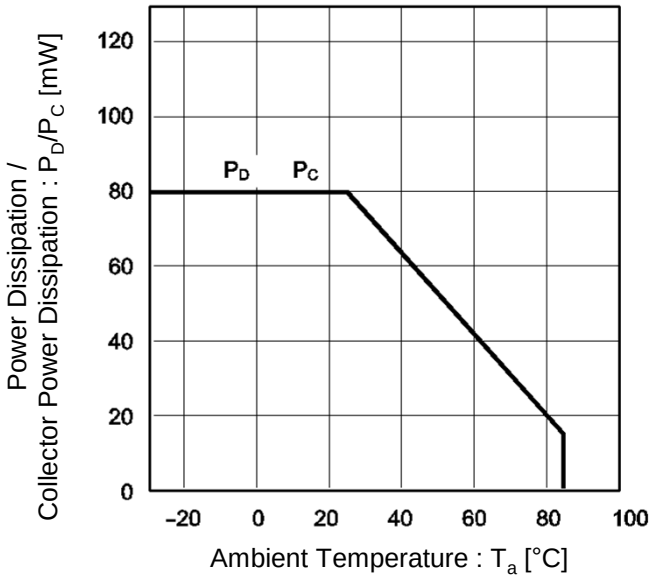

© 2015 ROHM Co., Ltd. All rights reserved.

●Electrical and optical characteristics curves

Fig.5 Forward Current vs. Forward Voltage

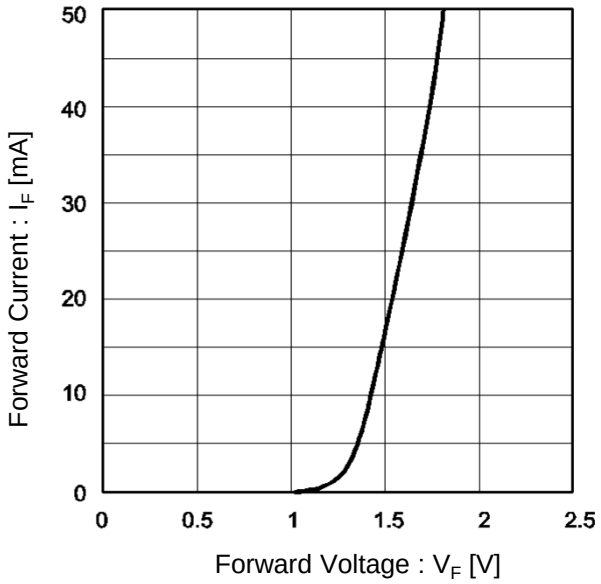

Fig.6 Collector Current vs. Forward Current

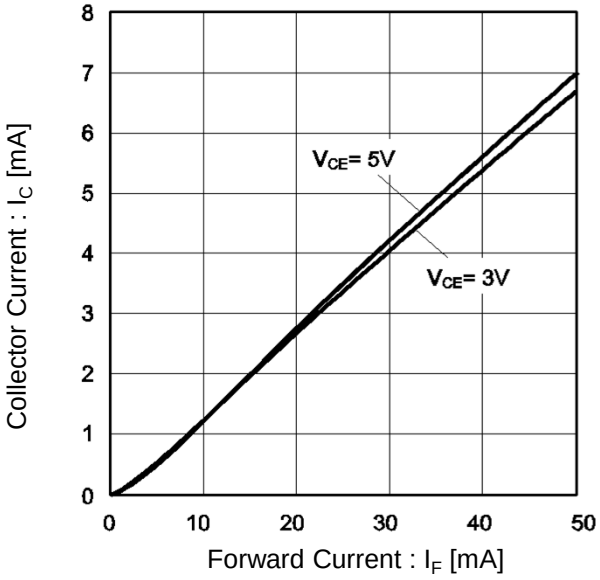

Fig.7 Relative Output vs. Ambient Temperature

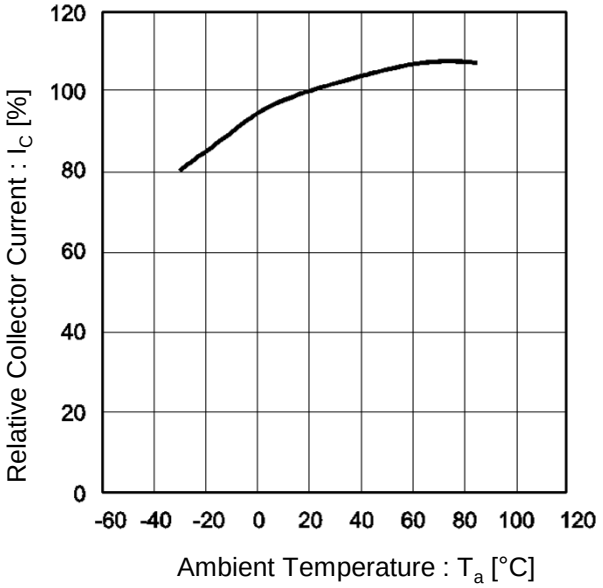

Fig.8 Response Time vs. Collector Current

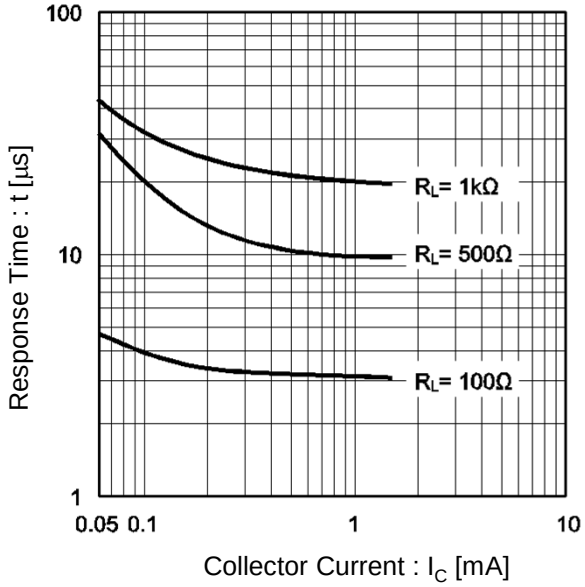

© 2015 ROHM Co., Ltd. All rights reserved.

●Electrical and optical characteristics curves

Fig.9 Dark Current vs. Ambient Temperature

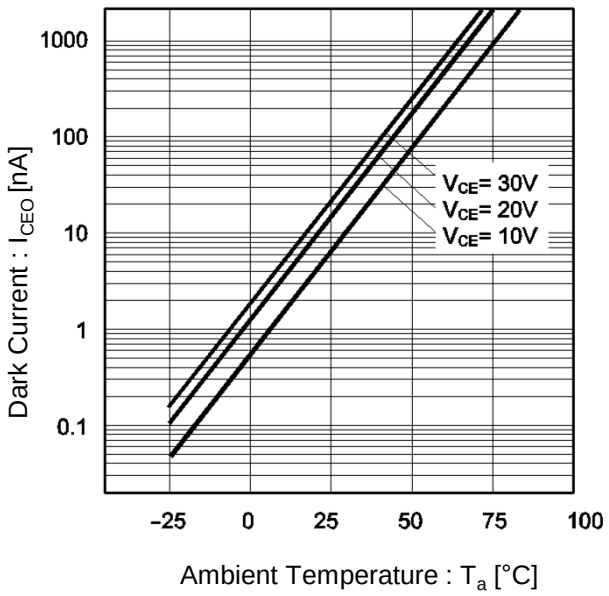

Fig.10 Output Characteristics

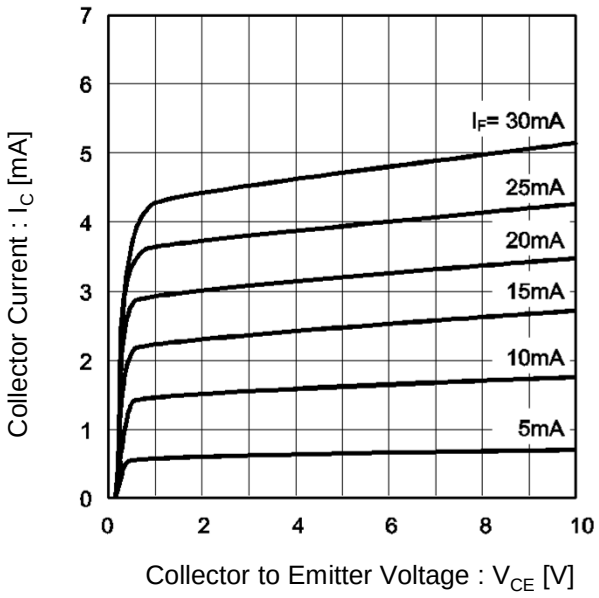

Fig.11 Response Time Measurement Circuit

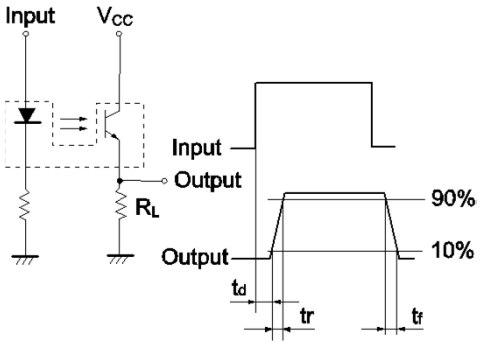

t_d : Delay time
t_r : Rise time (time for output current to rise from 10% to 90% of peak current)
t_f : Fall time (time for output current to fall from 90% to 10% of peak current)

© 2015 ROHM Co., Ltd. All rights reserved.

Notes

1) The information contained herein is subject to change without notice.

2) Before you use our Products, please contact our sales representative and verify the latest specifications :

3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors.
Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Poducts beyond the rating specified by ROHM.

4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.

6) The Products are intended for use in general electronic equipment (i.e. AV/OA devices, communication, consumer systems, gaming/entertainment sets) as well as the applications indicated in this document.

7) The Products specified in this document are not designed to be radiation tolerant.

8) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative : transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.

9) Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.

10) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.

11) ROHM has used reasonable care to ensur the accuracy of the information contained in this document. However, ROHM does not warrants that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.

12) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting non-compliance with any applicable laws or regulations.

13) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.

14) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.

ROHM SEMICONDUCTOR

Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/

© 2015 ROHM Co., Ltd. All rights reserved.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View RPI-0226 on WIN SOURCE
- Rohm Semiconductor Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management