



**THE DATASHEET OF  
BP5085-15**



### Absolute Maximum Ratings

Parameter	Symbol	Limits	Unit
Input voltage	$V_i$	400 *1	V
Maximum output current(15V)	$I_{150MAX}$	80 *2	mApk
Maximum output current(5V)	$I_{50MAX}$	350 *2	mApk
ESD endurance	$V_{surge}$	2	kV
Operating temperature range	$T_{opr}$	-20 ~ +80	°C
Storage temperature range	$T_{stg}$	-25 ~ +105	°C

\*1 Maximum input voltage at steady mode is 358V, but the over-applied voltage is 400Vpk, within 10 seconds.

\*2 Maximum output current is the peak of load current after the output smoothing capacitor. The maximum heating part of this module have to be below 150°C including self-heating and ambient temperature. And the average current must be in the range of electrical characteristics below.

### Electrical Characteristics


Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input voltage	$V_i$	226	282	358	V	DC
Output voltage1	$V_{15}$	14.0	15.0	16.0	V	$V_i=282V, I_{15}=80mA, I_5=0mA$
Output current1	$I_{15}$	0	-	80	mA	$V_i=282V$ *3
Output voltage2	$V_5$	4.75	5.0	5.25	V	$V_i=282V, I_{15}=0mA, I_5=200mA$
Output current2	$I_5$	0	-	350	mA	$V_i=282V$ *3
Line regulation1	$V_{r1}$	-0.3	0.1	0.3	V	$V_i=226\sim358V, I_{15}=80mA, I_5=0mA$
Line regulation2	$V_{r2}$	-0.3	0.1	0.3	V	$V_i=226\sim358V, I_{15}=0mA, I_5=350mA$
Load regulation1	$V_{l1}$	-0.3	0.05	0.3	V	$V_i=282V, I_{15}=0\sim80mA, I_5=0mA$ *4
Load regulation2	$V_{l2}$	-0.3	0.05	0.3	V	$V_i=282V, I_{15}=0mA, I_5=0\sim350mA$ *4
Output ripple voltage1	$V_{p1}$	-	0.1	0.2	Vp-p	$V_i=282V, I_{15}=80mA, I_5=0mA$
Output ripple voltage2	$V_{p2}$	-	0.1	0.2	Vp-p	$V_i=282V, I_{15}=0mA, I_5=350mA$
Power conversion efficiency1	$\eta_1$	60	70	-	%	$V_i=282V, I_{15}=80mA, I_5=0mA$ *4
Power conversion efficiency2	$\eta_2$	45	55	-	%	$V_i=282V, I_{15}=0mA, I_5=350mA$ *4

\*1 Maximum output current varies depending on ambient temperature; please refer to derating curve.

\*2 Please refer to Load regulation, Conversion efficiency.

### Application circuit

BP5085-15

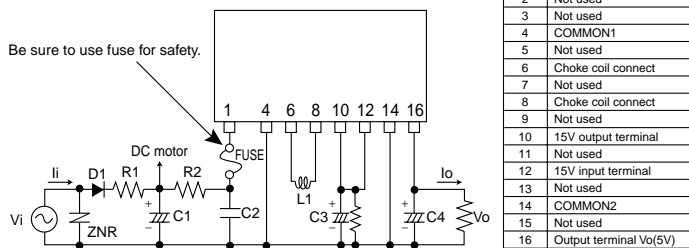


For actual usage, Please kindly evaluate and confirm our part mounted in your product, Especially, Please make sure to confirm whether the load current exceed Max. rated current by using the current probe.


### External components setting

FUSE: Fuse	Please make sure to use quick acting fuse 1A / Please use the fuse resistance for R2.
C1: Capacitor for input voltage smoothing	Capacitance : 33 $\mu$ F-820 $\mu$ F Rated voltage : 450V or higher Ripple current is 0.13Arms above.
C2: For noise terminal voltage reduction	Capacitance : 0.1 $\mu$ F-0.22 $\mu$ F Rated voltage : 450V or higher Film capacitor or ceramic capacitor. Reduce the noise terminal voltage. The constant value should be evaluated in the set.
C3: Capacitor for Output (15V output)	Capacitance : 220 $\mu$ F-1000 $\mu$ F Rated voltage : 35V or higher, ESR is 0.16 $\Omega$ max. Ripple current is 0.4Arms above. Output ripple voltage is influenced. Please evaluate it in the actual set
C4: Capacitor for Output (5V output)	Capacitance : 220 $\mu$ F-1000 $\mu$ F Rated voltage : 16V or higher, ESR is 0.25 $\Omega$ max. Ripple current is 0.4Arms above. Output ripple voltage is influenced. Please evaluate it in the actual set.
L1: Choke coil	L : 1mH Allowable current : 600mA or higher. Please use the one that is hard to be magnetic saturated even in the high temperature.
D1: Rectifier diode	In the absolute maximum ratings, the reverse peak voltage should be 800V or higher, the average rectifying current should be 1A or higher, and the peak surge current should be 40A or higher. For rush current, to use the large capacity diode for surge current is recommended.
R1: Rush current limiting resistance	Limiting resistance must be used because rush current at powering up is applied in proportion to the C1 capacitance. Please determine the resistance value after confirming the rising characteristics of the module at powering up.
R2: For noise terminal	10 $\Omega$ -22 $\Omega$ 1/4W Reduce the noise terminal voltage. Please set it, if necessary. The constant value should be evaluated in set.
ZNR: Varistor	Varistor must be used. It protects this part from lightning surge and static electricity.


### Dimension(Unit : mm)

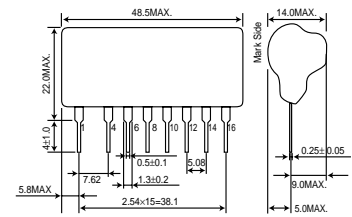


### Derating Curve

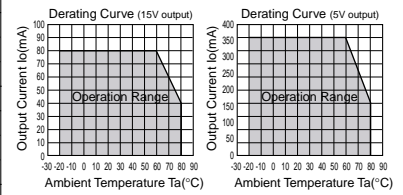


### Conversion Efficiency

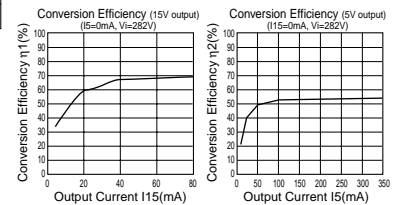

### Load Regulation

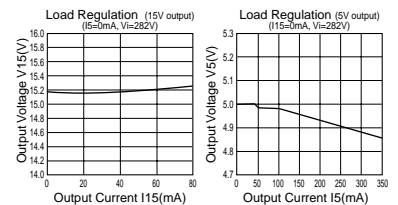

### Surface Temperature Rising

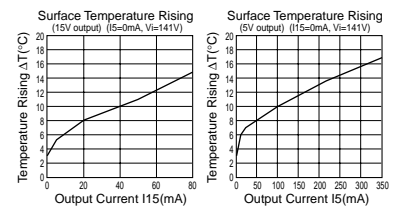

# Precautions on Use of ROHM Power Module

## Safety Precautions

- 1) The products are designed and produced for application in ordinary electronic equipment (AV equipment, OA equipment, telecommunication equipment, home appliances, amusement equipment etc.). If the products are to be used in devices requiring extremely high reliability (medical equipment, transport equipment, aircraft/spacecraft, nuclear power controllers, fuel controllers, car equipment including car accessories, safety devices, etc.) and whose malfunction or operational error may endanger human life and sufficient fail-safe measures, please consult with the Company's sales staff in advance. If product malfunctions may result in serious damage, including that to human life, sufficient fail-safe measures must be taken, including the following:
  - [a] Installation of protection circuits or other protective devices to improve system safety
  - [b] Installation of redundant circuits in the case of single-circuit failure
- 2) The products are designed for use in a standard environment and not in any special environments. Application of the products in a special environment can deteriorate product performance. Accordingly, verification and confirmation of product performance, prior to use, is recommended if used under the following conditions:
  - [a] Use in various types of liquid, including water, oils, chemicals, and organic solvents
  - [b] Use outdoors where the products are exposed to direct sunlight, or in dusty places
  - [c] Use in places where the products are exposed to sea winds or corrosive gases, including Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, and NO<sub>2</sub>
  - [d] Use in places where the products are exposed to static electricity or electromagnetic waves
  - [e] Use in proximity to heat-producing components, plastic cords, or other flammable items
  - [f] Use involving sealing or coating the products with resin or other coating materials
  - [g] Use involving unclean solder or use of water or water-soluble cleaning agents for cleaning after soldering
  - [h] Use of the products in places subject to dew condensation
- 3) The products are not radiation resistant.
- 4) The Company is not responsible for any problems resulting from use of the products under conditions not recommended herein.
- 5) The Company should be notified of any product safety issues. Moreover, product safety issues should be periodically monitored by the customer.

## Precautions Regarding Application Example and External Circuits

- 1) If change is made to the constant of an external circuit, allow a sufficient margin due to variations of the characteristics of the products and external components, including transient characteristics, as well as static characteristics. Please be informed that the Company has not conducted investigations on whether or not particular changes in the application examples or external circuits would result in the infringement of patent rights of a third party.
- 2) The application examples, their constants, and other types of information contained herein are applicable only when the products are used in accordance with standard methods. Therefore, if mass production is intended, sufficient consideration to external conditions must be made.

## Prohibitions Regarding Industrial Property

### Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document use silicon as a basic material.  
Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.



#### About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View BP5085-15 on WIN SOURCE](#)
-  [Rohm Semiconductor](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management