



THE DATASHEET OF MAXQSERIALJTAG-KIT





MAXQ Serial-to-JTAG Evaluation Kit

General Description

The MAXQ[®] serial-to-JTAG evaluation kit (EV kit) is a convenient way to evaluate the capabilities of the MAXQ serial-to-JTAG programming interface board, used to interface the JTAG port on MAXQ microcontrollers to a PC. The EV kit contains the MAXQ serial-to-JTAG board and an interface cable. With the included board and cable, the EV kit provides a completely functional system ideal for evaluating the capabilities of the MAXQ serial-to-JTAG board.

EV Kit Contents

- ◆ MAXQSERIALJTAG Evaluation Board
- ◆ Interface Ribbon Cable

Features

- ◆ Easily Load Code and Debug Using On-Board Serial Interface
- ◆ Serial-to-JTAG Interface Provides In-Application Debugging Features
 - Step-by-Step Execution Tracing
 - Breakpointing by Code Address, Data Memory Address, or Register Access
 - Data Memory View and Edit

Ordering Information

PART	TYPE
MAXQSERIALJTAG-KIT	EV Kit

Component List

DESIGNATION	QTY	DESCRIPTION
C1, C3, C4, C5, C6, C10, C11, C13, C15, C17, C18, C19	12	100nF, 10V min capacitors (0805)
C2, C9, C12, C16	4	10nF, 25V min capacitors (0805)
C7, C8	2	22pF ±10%, 10V min capacitors (0805)
C14, C20	2	3.3µF, 10V min capacitors (1206)
C21	1	47pF, 10V min capacitor (0805)
DS1	1	Red LED Lumex SML-LX23SRC or SML-LX23IC
D1	1	Diode, 1N5908 (DO-201)
D2	1	Diode, 1N5819 (SOD123)
FB1, FB2, FB3, FB4, FB5, FB7, FB8, FB9, FB10	9	Ferrite chips (0805) Steward HZ0805G471R-00
FB6	1	Ferrite chip (1206) Steward HZ1206E601R-00
F1	1	Fuse Littlefuse 0251.500M
JH1, JH2, JH3	3	Single-row 1x2 headers Molex 22-28-4020
J1	1	Connector, DB9, female Amp/Tyco 745781-4

DESIGNATION	QTY	DESCRIPTION
J2	1	Jack, coaxial, ID = 2.5mm, OD = 5.5mm, barrel length = 9.5mm CUI Inc. PJ-102B
P1	0	Do not populate
P2	1	2x5 header Molex 10-88-1101
P3	0	Do not populate
Q1	1	MOSFET, 2N7002 (SOT23)
R1, R2, R3, R4, R12	5	47Ω ±5%, 1/10W resistors (0805)
R5	1	68kΩ ±5%, 1/10W resistor (0805)
R6	0	Do not populate (0Ω resistor)
R7	0	Do not populate (3.3kΩ resistor)
R8, R9	2	47kΩ ±5%, 1/10W resistors (0805)
R10	1	820Ω ±5%, 1/10W resistor (0805)
R11, R16	2	10kΩ ±5%, 1/10W resistors (0805)
R13	1	1.0kΩ ±5%, 1/10W resistor (0805)
R14	1	3.3kΩ ±5%, 1/10W resistor (0805)
R15	1	10Ω ±5%, 1/10W resistor (0805)
U1	1	40ns, low-power, 3V/5V, rail-to-rail single-supply comparator (5 SOT23) Maxim MAX9140EUK-T
U2	1	Low-capacitance, 4-channel, ±15kV ESD-protection array for high-speed data interfaces (6 TDFN) Maxim MAX3204EETT+

MAXQ is a registered trademark of Maxim Integrated Products, Inc.



Maxim Integrated Products 1

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

Evaluates: Programming Interface for MAXQ Microcontrollers

MAXQ Serial-to-JTAG Evaluation Kit

Component List (continued)

DESIGNATION	QTY	DESCRIPTION
U3	1	Ultra-high-speed flash microcontroller (44 TQFP) Maxim DS89C430-ENL+
U4	1	±15kV ESD-protected, +5V RS-232 transceiver (20 SO) Maxim MAX203ECWP+
U5	1	High-speed, low-voltage, CMOS analog multiplexer/switch (16 TSSOP) Maxim MAX4619CUE+

DESIGNATION	QTY	DESCRIPTION
U6	1	Quad buffer with 3-state outputs 74VHC125
U7	0	Do not populate Maxim DS1086
Y1	1	7.3728MHz crystal Citizen HC49US7.3728MABJB
None	1	PCB: MAXQ Serial-to-JTAG EV Kit Board

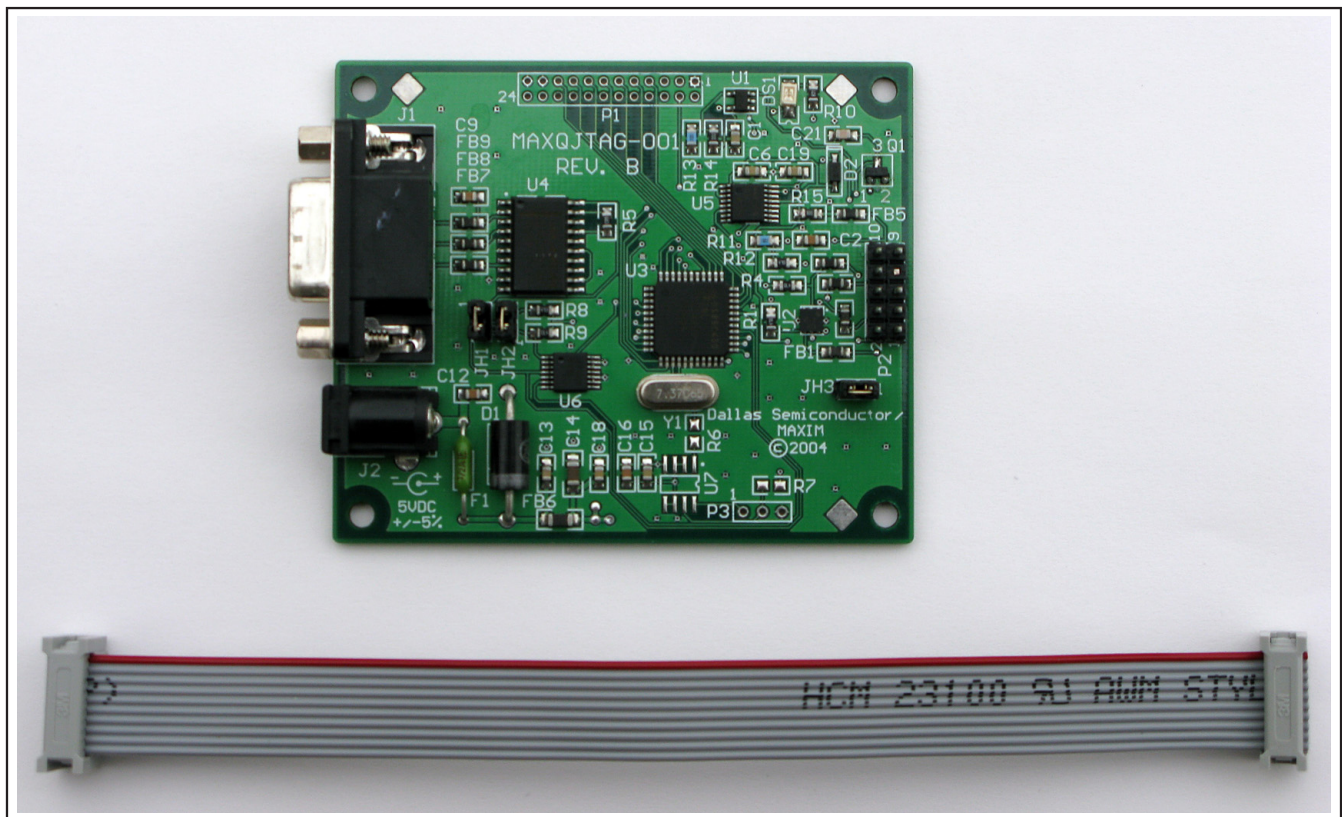


Figure 1. MAXQSERIALJTAG Evaluation Board

MAXQ Serial-to-JTAG Evaluation Kit

Evaluates: Programming Interface for MAXQ Microcontrollers

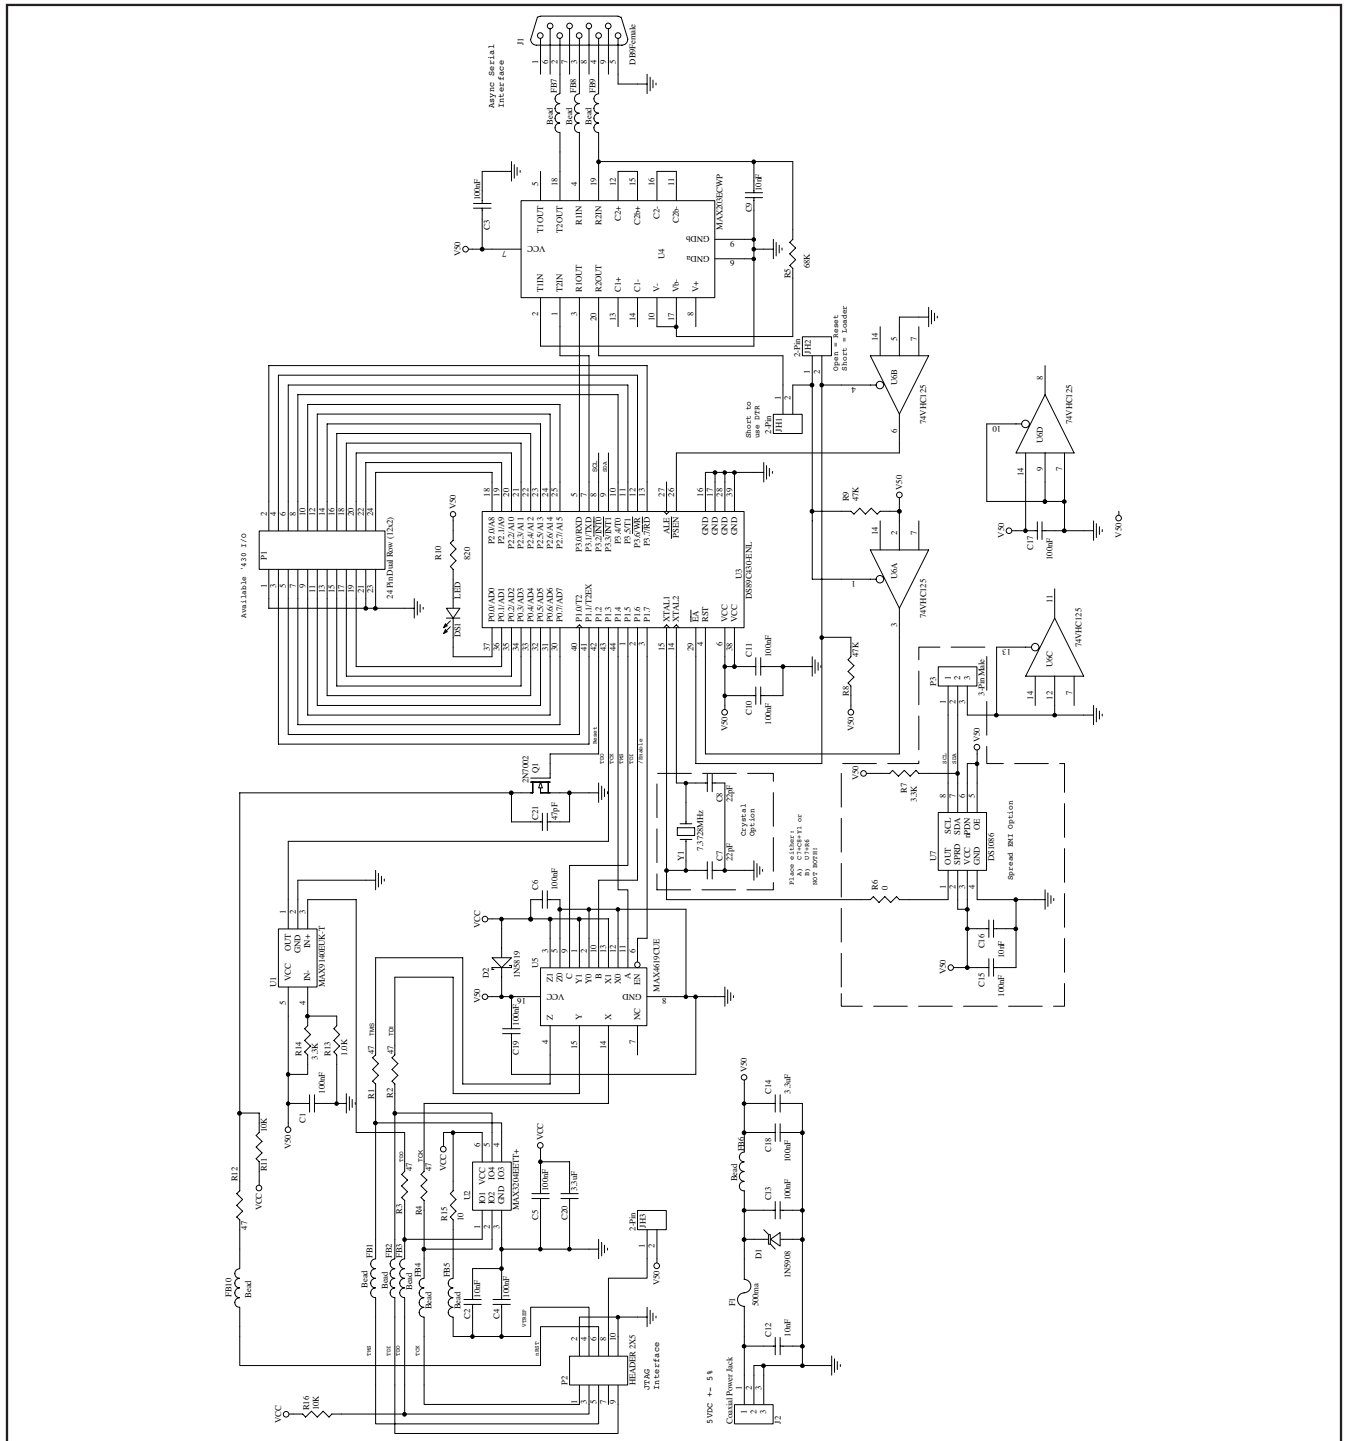


Figure 2. MAXQSERIALJTAG Schematic

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View MAXQSERIALJTAG-KIT on WIN SOURCE](#)
- ⊖ [Maxim Integrated Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management