




**THE DATASHEET OF  
SMH-103-02-T-D**



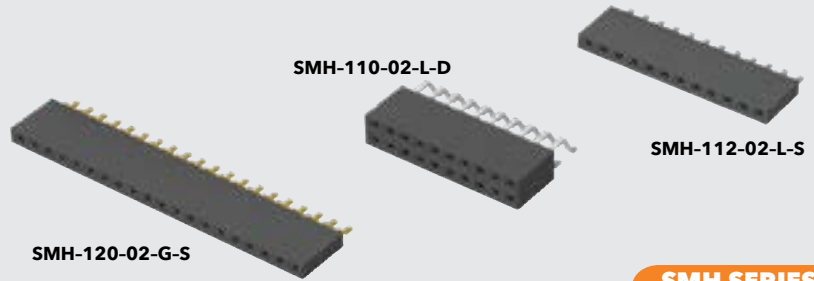

(2.54 mm) .100"

SMH SERIES

# SMT HORIZONTAL SOCKET

**Mates With:**

TSW, MTSW, MTLW,  
EW, ZW, TSS, ZSS, TSM

**SPECIFICATIONS**

For complete specifications and recommended PCB layouts see [www.samtec.com?SMH](http://www.samtec.com?SMH)

**Insulator Material:**

Black LCP

**Contact Material:**

Phosphor Bronze

**Plating:**

Au or Sn over  
50 μ" (1.27 μm) Ni

**Operating Temp Range:**

-55 °C to +125 °C with Gold

-55 °C to +105 °C with Tin

**Insertion Depth:**

(3.68 mm) .145" to

(6.35 mm) .250"

**Max Cycles:**

100 with 10 μ" (0.25 μm) Au

**RoHS Compliant:**

Yes

**PROCESSING**

**Lead-Free Solderable:**

Yes

**SMT Lead Coplanarity:**

(0.15 mm) .006" max (02-24)

(0.20 mm) .008" max (25-36)\*

\*(.004" stencil solution

may be available; contact

[ipg@samtec.com](mailto:ipg@samtec.com))

**RECOGNITIONS**

For complete scope of

recognitions see

[www.samtec.com/quality](http://www.samtec.com/quality)



FILE NO. E111594

**ALSO AVAILABLE (MOQ Required)**


- Other platings

**Important Note:**


SMH mated to TSM-DH/-SH not coplanar, SSM-DH/-SH recommended for coplanar applications.

**Note:**

Some lengths, styles and options are non-standard, non-returnable.

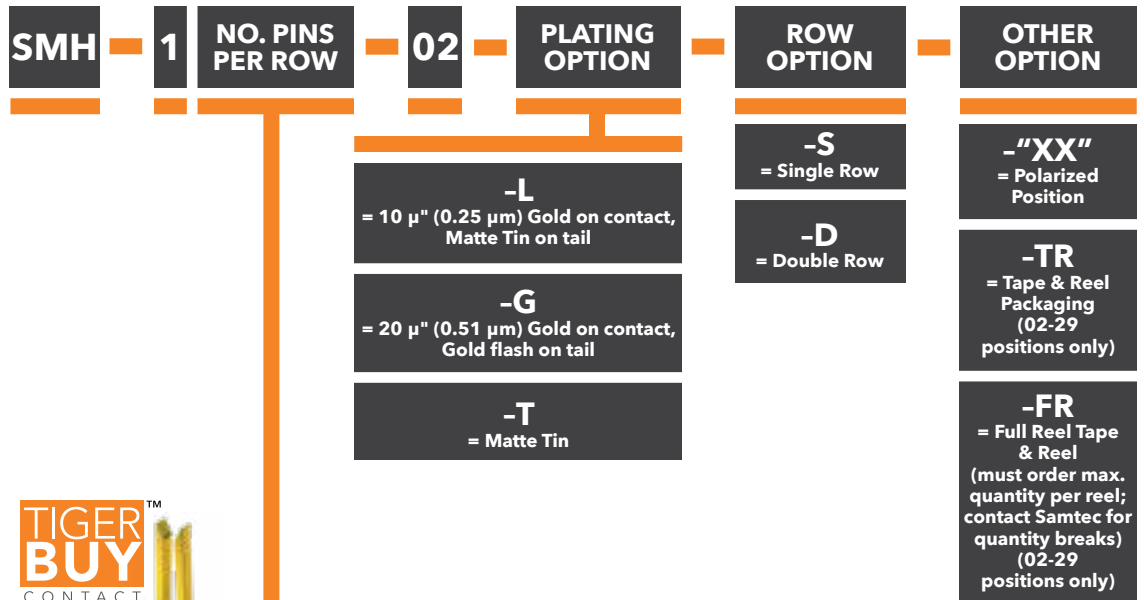


02 thru 36

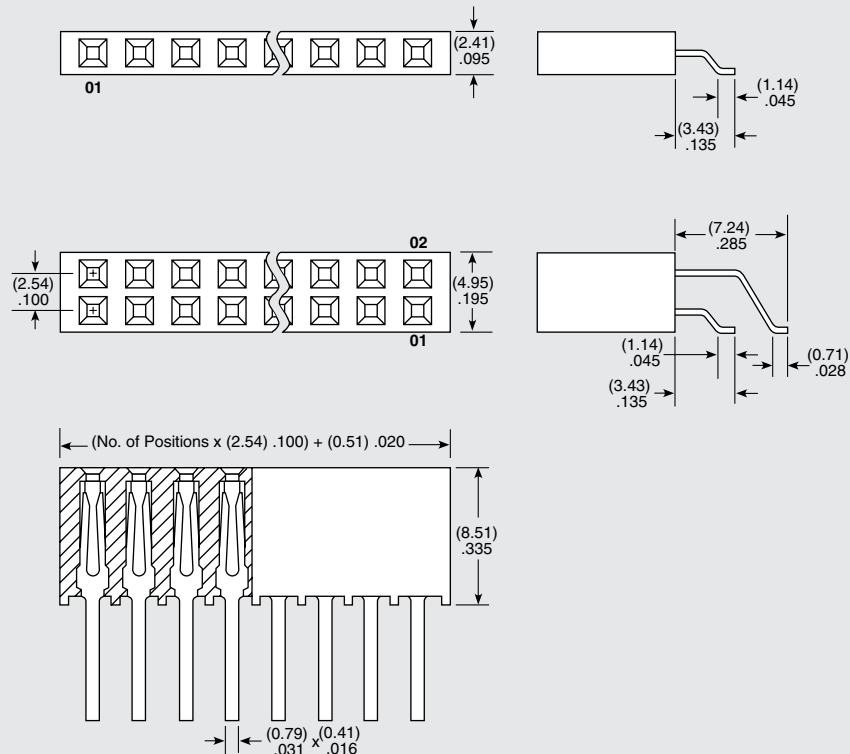

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SMH-103-02-T-D on WIN SOURCE](#)

 [Samtec Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management