



THE DATASHEET OF SPS6X88-C





THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
SPS6X88-C	.47 LB/100 PCS (214 g/100 PCS)

NOTES:

1. TX6A SHIELDED MODULAR PLUG FOR USE WITH SHIELDED CATEGORY 6 OR CATEGORY 6A CABLES.
2. MATERIAL: SHIELDED HOUSING, LOAD BAR, DIVIDER, STRAIN COLLAR - POLYCARBONATE UL94V-0 RATED; PLUG SHIELD - C26000 CARTRIDGE BRASS; STRAIN RELIEF BOOT - BLACK TPE; CONTACT TERMINAL - PHOSPHOR BRONZE ELECTRO-POLISHED AND PLATED WITH .000050" MIN. GOLD IN MATING AREA.
3. PLUG ACCEPTS 4 PAIR CABLE WITH 23-24AWG SOLID AND STRANDED CONDUCTORS WITH A MAXIMUM OUTER JACKET OF .300" (7.62mm) AND MAXIMUM INSULATED CONDUCTOR DIAMETER OF .047" (1.19mm).
4. MEETS DIMENSIONAL REQUIREMENTS OF ANSI/TIA-1096-A (FORMERLY FCC PART 68). ALL DIMENSIONS MAXIMUM UNLESS OTHERWISE SPECIFIED.
5. TERMINATED CONTACT HEIGHT DIMENSION: .237±.005".
6. DIMENSIONS IN PARENTHESIS ARE METRIC.

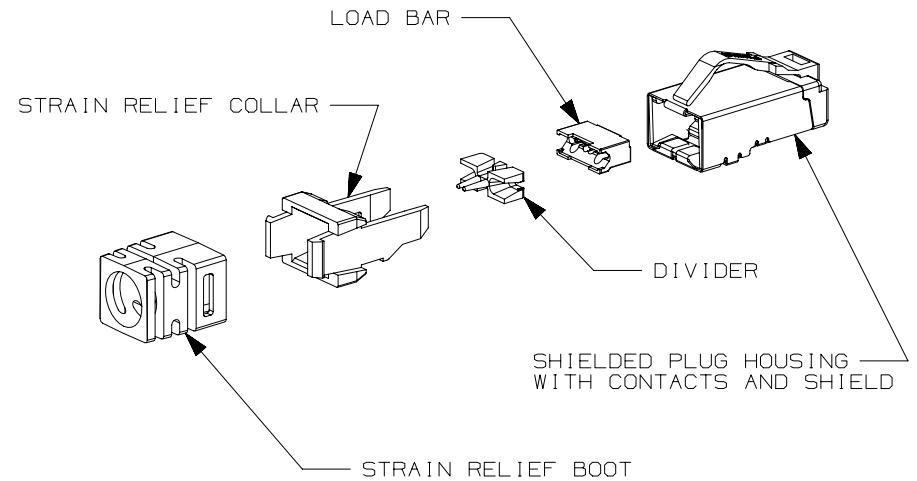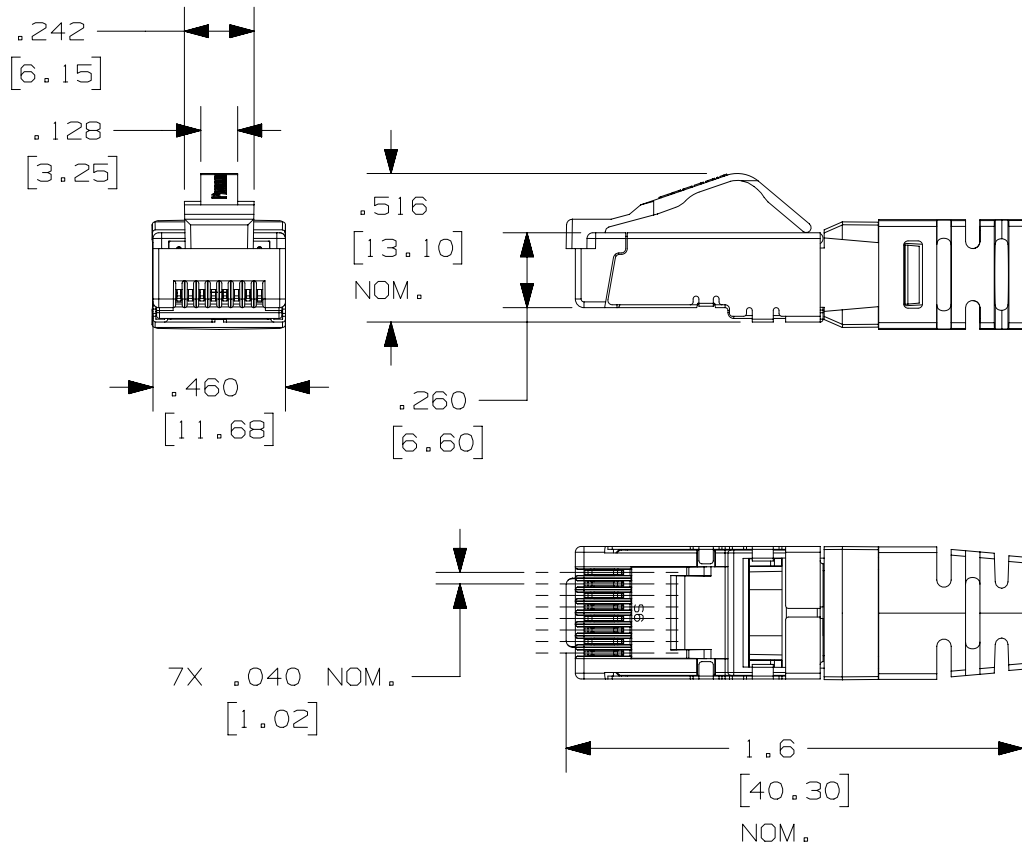

PART NUMBER		SPS6X88-C	
TITLE		TX6A SHIELDED MODULAR PLUG	
		CUSTOMER DRAWING	
ITEM REVISION NAME		09M129BR/01	
DATASET FILE NAME		09M129BR_DC01/01D	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)			
.x ± .xxx ± .010 (.3)			
.xx ± .03 (.8) ANGLES ±		MATERIAL: SEE NOTES	
THIRD ANGLE PROJECTION		DRAWING NUMBER: 09M129BR-01	
DRAWN BY	DATE	CHK	SCALE
MDJR	5-26-15	REFR	NONE
REV	DATE	BY	CHK
4	2-28-17	BJN	NAGL
DESCRIPTION		ECN	
D. REVISED CABLE DIA. IN NOTE 3 TO .300", WAS .320" REVISED & REDRAWN PREVIOUS REVISIONS REMVD FOR CLARITY		09M129BR-01	
SHT 1 OF 1		A	

D10100DA/14

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SPS6X88-C on WIN SOURCE](#)

 [Panduit Corp](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management