





**THE DATASHEET OF
SL8801/12-111A5-00**



3M™ TWIN AXIAL CABLE CUSTOM CUTS

<p>SL8801/12-111A5-00</p> <p><i>Typical Application</i> SFF 8087 miniSAS with sidebands, other high speed 100 ohm twin axial applications</p> <p><i>Construction</i> DPPBBBBPPD D = drain wire P = pair B = sideband insulated conductor</p>	<p>PART NUMBERING SYSTEM</p> <p>SL8801/12 - 111A5 - <input type="text"/> - <input type="text"/></p> <p>min length 6"</p> <p>S - Straight O - Opposite (Straight and Formed) D - Formed Down R - Formed Reversed (one up/one down)</p>
--	--

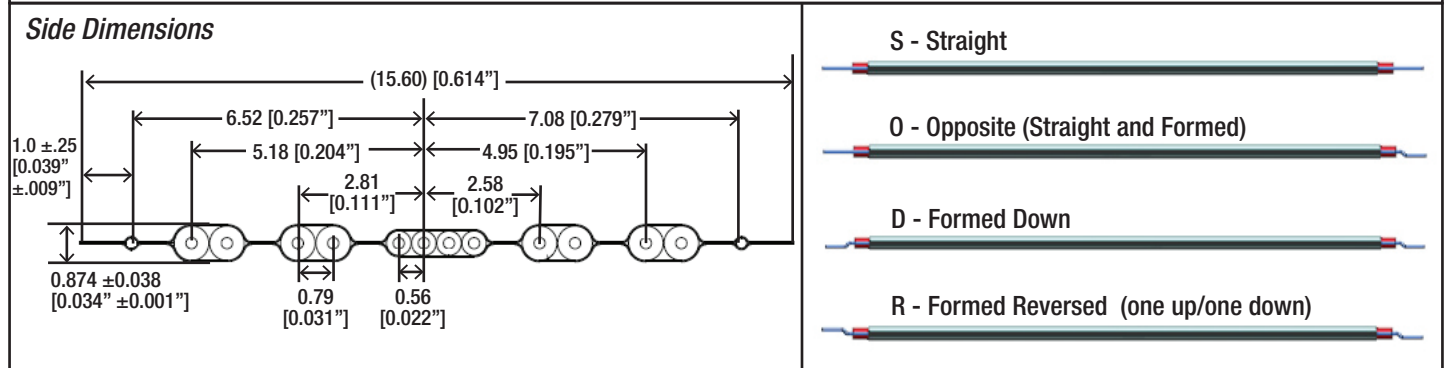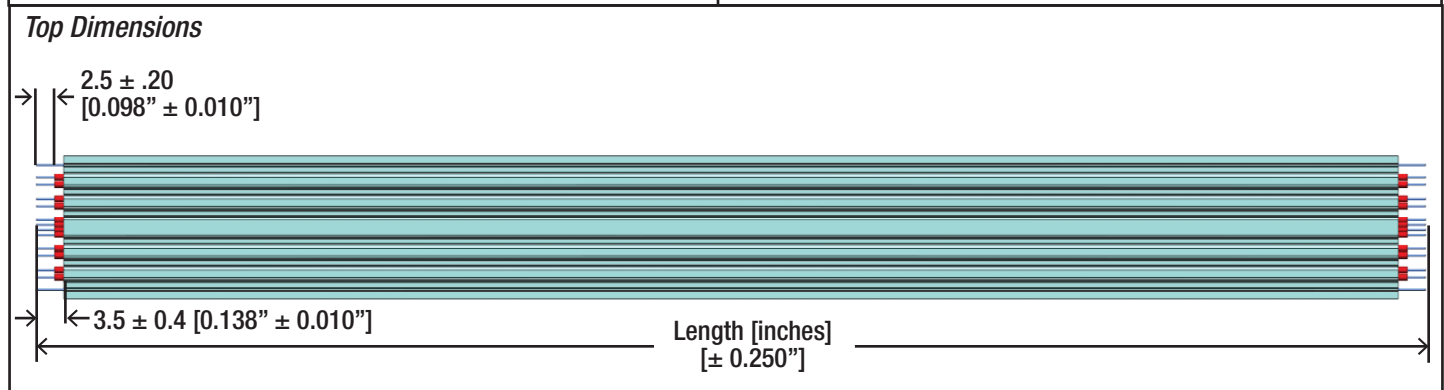

Length is in inches all other dimensions are in mm [inches]


Conductor length is determined before lead forming

Digi-Key can offer you a quote on your secondary services. For more information on 3M available options or if you need assistance, contact CustomCut.3MProducts@digikey.com. Please send dimensional drawings to the aforementioned e-mail address.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SL8801/12-111A5-00 on WIN SOURCE](#)

 [3M Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management