





THE DATASHEET OF SRB-R-5



PART NO.	WIRES ACCOMMODATED	APPROX. WIRE SIZE	MOUNTING HOLES				E	F MAX. PANEL THICKNESS
			A	B	C	D		
SRB-D-3	SP-1, SPT-1 #18/2	.120 X .220 (3.1 X 5.6)	.437 (11.10)	.395 (10.03)	.460 (11.68)	.410 (10.41)	.160 (4.06)	.062 (1.57)
	SP-1, SPT-1 #18/2 XT (CLOCKWIRE) #18/2	.11 X .21 (2.8 X 5.3) .09 X .18 (2.3 X 4.6)	.375 (9.53)	.345 (8.76)	.425 (10.80)	.410 (10.41)	.155 (3.94)	.062 (1.57)
SRB-F-4	SP-2, SPT-2 #16/2 HPN #16/2	.161 X .30 (4.1 X 7.6)	.515 (13.08)		.570 (14.98)	.500 (12.70)	.171 (4.34)	.100 (2.54)
	SP-2, SPT-2 #18/2 HPN #18/2	.15 X .28 (3.8 X 7.1) HPN #16/3	.500 (12.70)		.570 (14.98)	.500 (12.70)	.171 (4.34)	.100 (2.54)
SRB-F-5	HPN #16/3	.16 X .37 (4.1 X 9.4)			.610 (15.49)	.600 (15.24)	.240 (6.10)	.130 (3.30)
	SPT-2 #18/3	.15 X .34 (3.8 X 8.6)	.562 (14.27)	.530 (13.46)	.610 (15.49)	.600 (15.24)	.240 (6.10)	.130 (3.30)
	SPT-3 #16/2	.20 X .37 (5.1 X 9.4)			.610 (15.49)	.600 (15.24)	.240 (6.10)	.130 (3.30)
SRB-F-7	SPT-3 #18/2	.18 X 3.5 (4.6 X 8.9)						
	SPT-1 #18/3	.19 X .30 (3.0 X 7.6)	.500 (12.70)	.456 (11.58)	.545 (13.84)	.401 (10.20)	.142 (3.60)	.071 (1.80)
	SPT-2 & HPN #18/2	.15 X .28 (3.8 X 7.1)	.500 (12.70)	.456 (11.58)	.545 (13.84)	.401 (10.20)	.142 (3.60)	.071 (1.80)
SRB-R-5	SPT-2 & HPN #16/2	.16 X .30 (4.1 X 7.6)	.500 (12.70)					
	SV, SVT #18/2	.250 (6.43)	.500 (12.70)					
	SV, SVT #18/3	.265 (6.73)	.515 (13.08)					
SRB-R-6	HPD #16/2	.290 (7.37)	.515 (13.08)	.465 (11.81)	.560 (14.22)	.430 (10.92)	.165 (4.19)	.100 (2.54)
	HPD #18/2	.270 (6.86)	.500 (12.70)					
	SJ, SUT, SJ0 #16/2	.325 (8.26)	.656 (16.66)	.570 (14.48)	.730 (18.54)	.680 (17.27)	.275 (6.99)	.125 (3.18)
SRB-R-6	SJ, SUT, SJ0 #18/2	.300 (7.62)						
	SJ, SUT, SJ0 #16/3	.355 (9.02)						
	SJ, SUT, SJ0 #18/3	.330 (8.38)	.687 (17.45)	.570 (14.48)	.730 (18.54)	.680 (17.27)	.275 (6.99)	.125 (3.18)

BUSHING DIMENSIONS

KEY-CONTOUR STYLE

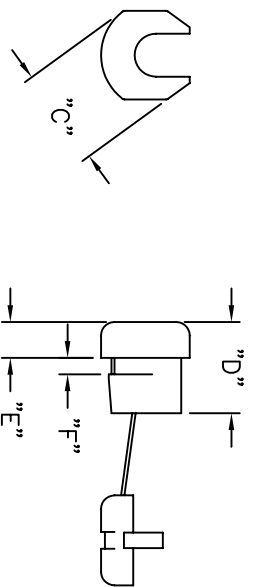



MS-01).

TITLE: STRAIN RELIEF BUSHINGS		DWG IN FINAL		PART #		PRINT TYPE	
TOLERANCES UNLESS NOTED		FILE #	SRB	DWG IN	FINAL	CA	
.XX=±.010		MAT'L:	SEE NOTES	PART #		TYPE	
.XXX=±.005		RE:	RICHCO, INC.	SEE TABLE		CA	
FRAC=±1/64		DWN: R.S.	APP:	RICHCO INC.		CA	
ANG=±1°		DI: 12-08-93	DI:	Po Box 804238, CHICAGO, 60680		CA	
MNN, CHANGED FILE NO.		SM 01.08.02		RICHCO INC.		CA	
e removed		JL 12.9.99		Po Box 804238, CHICAGO, 60680		CA	
TION		ENGR DATE		(773) 539-4060		CA	

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View SRB-R-5 on WIN SOURCE](#)
-  [Essentra Components](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management