




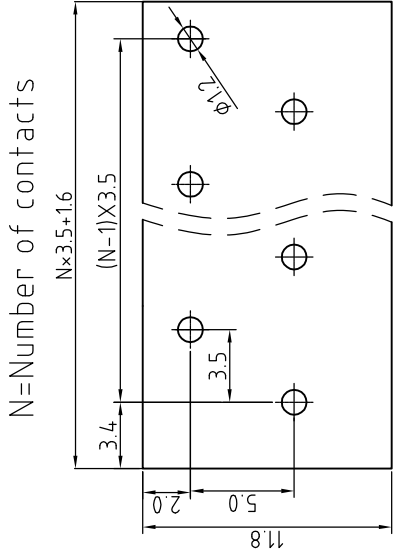

**THE DATASHEET OF
OSTHC201080**

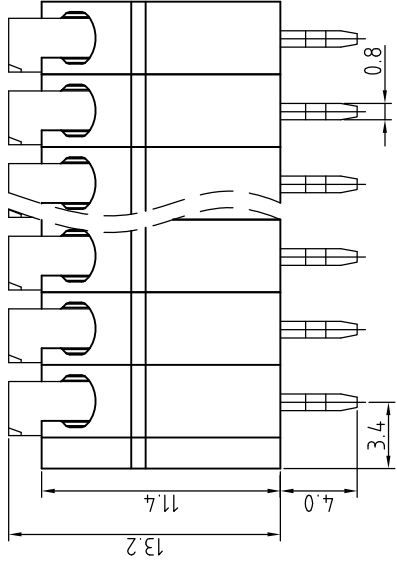

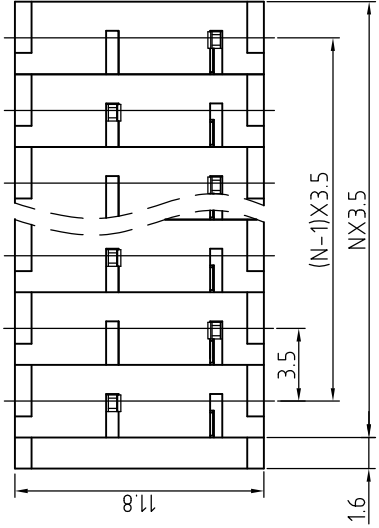


P.C.B. LAYOUT

REV	Δ	SIGN	DESCRIPTION	CHK.	DATE

Technical Data:
 Electrical
 Pitch: 3.5MM
 Voltage rating: 300V
 Current rating: 5 Amps
 Contact resistance: 20mΩ
 Withstanding Voltage: 2500V
 Wire Range: 16-20AWG
 Wire strip length: 6-7MM
 Mechanical:
 Operating temperature: -40°C
 Soldering temperature: 250°C±10
 Temperature= 250°C±10
 5 seconds max
 Safety approval:
 RoHS Compliance

Part No.: **OSTHCXX1080**

No. of Poles
 02 2 Poles
 03 3 Poles
 ...
 24 24 Poles

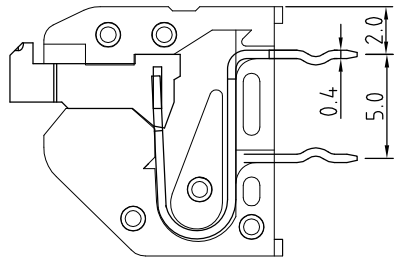

Nonstandard colors
 Mins could apply



5	Short Terminal	Copper Alloy
4	Long Terminal	Copper Alloy
3	Lever	PA66 UL94V-0
2	Cover	PA66 UL94V-0
1	Body	PA66 UL94V-0
ITEM	NAME OF PART	MATERIAL
DWG.	DATE	DATE
CHK.	DATE	DATE
APP.	DATE	DATE



ON-SHORE TECHNOLOGY, INC.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View OSTHC201080 on WIN SOURCE](#)
-  [On Shore Technology Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management