


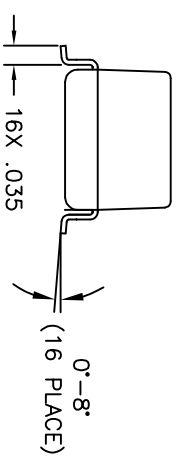


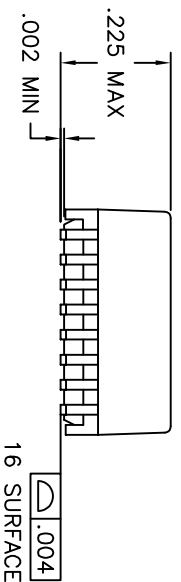

THE DATASHEET OF ST7033QNL

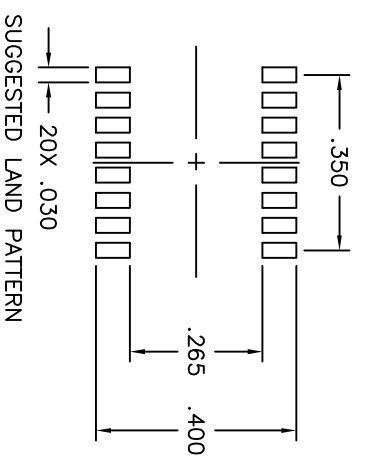


WITH FLAMMABILITY
 D-002,
 C
] WITH THE FOLLOWING
 REFERENCE ONLY.

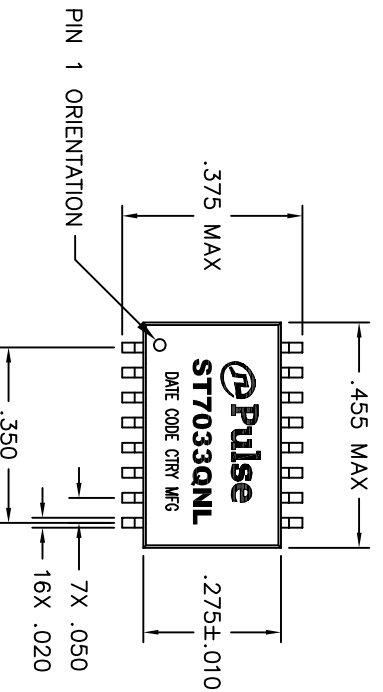

NS OTHERWISE SPECIFIED
 C
 ATTC
 (3-12) = 1 ±5%

NS	OTHERWISE SPECIFIED
C	OTHER INFORMATION.)
ATTC	
(3-12)	= 1 ±5%
AT 10 KHZ, 20 mV)	
S MAX	
MHZ MINIMUM).	
0 KHZ, 1 V)	
◎ 60 SECONDS	

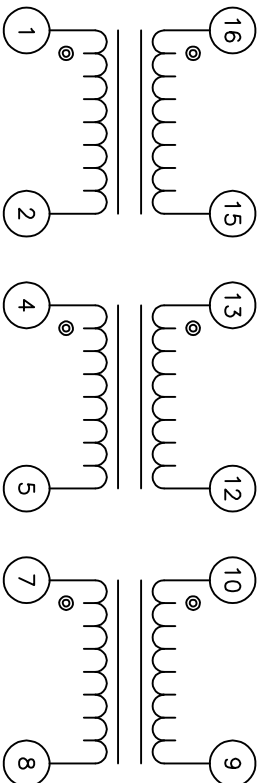



SCHEMATIC

rights reserved. Drawing specifications subject to change without notice. (09/13/10)

T DESCRIPTION	PS DRAWING	SHEET:	DWG. NO./ PART NO.	REV.
OD,1:1,SM,TU	PS-2400.001-A	1	ST7033QNL	M13

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View ST7033QNL on WIN SOURCE](#)
-  [Pulse Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management