



**THE DATASHEET OF
SH01D0505A**



FEATURES

- Efficiency up to 80%
- SMD Package with Industry Standard Pinout
- Operating Temperature Range -40°C to $+85^{\circ}\text{C}$
- Moisture sensitivity level (MSL) 2
- Isolation Voltage 1500 VDC
- High Accuracy of Pin Planarity
- Lead free, RoHS Compliant
- 3 Years Product Warranty
- UL/cUL 62368-1, UL/cUL 60950-1 approval



The SH01S/D series is miniature, SMD Package, isolated 1W DC/DC converters with 1,500VDC isolation. It allows a wide operating temperature range of -40°C to $+85^{\circ}\text{C}$. These isolated DC/DC converters are the latest offering from a world leader in power systems technology and manufacturing — Delta Electronics, Inc

Model List

| Model Number | Input Voltage (Range) VDC | Output Voltage VDC | Output Current | | Input Current | | Load Regulation % (max.) | Max. capacitive Load uF | Efficiency (typ.) | | |
|--------------|------------------------------|-----------------------|----------------|------------|------------------------|----------------------|-----------------------------|----------------------------|-------------------|----|----|
| | | | Max. mA | Min. mA | @Max. Load mA(typ.) | @No Load mA(typ.) | | | @Max. Load % | | |
| SH01S0503A | 5 (4.5 ~ 5.5) | 3.3 | 300 | 6 | 271 | 30 | 10 | 33 | 73 | | |
| SH01S0505A | | 5 | 200 | 4 | 256 | | 10 | | 78 | | |
| SH01S0509A | | 9 | 110 | 2 | 254 | | 10 | | 78 | | |
| SH01S0512A | | 12 | 84 | 1.5 | 259 | | 8 | 78 | | | |
| SH01S0515A | | 15 | 67 | 1 | 254 | | 7 | 79 | | | |
| SH01D0505A | | ± 5 | ± 100 | ± 2 | 270 | | 10 | 74 | | | |
| SH01D0512A | | ± 12 | ± 42 | ± 0.8 | 259 | | 8 | 33* | 78 | | |
| SH01D0515A | | ± 15 | ± 33 | ± 0.7 | 254 | | 7 | 78 | | | |
| SH01S1203A | | 12 (10.8 ~ 13.2) | 3.3 | 300 | 6 | | 112 | 15 | 8 | 33 | 74 |
| SH01S1205A | | | 5 | 200 | 4 | | 109 | | 8 | | 76 |
| SH01S1209A | 9 | | 110 | 2 | 106 | 8 | 78 | | | | |
| SH01S1212A | 12 | | 84 | 1.5 | 106 | 5 | 79 | | | | |
| SH01S1215A | 15 | | 67 | 1 | 105 | 5 | 80 | | | | |
| SH01D1205A | ± 5 | | ± 100 | ± 2 | 113 | 8 | 74 | | | | |
| SH01D1212A | ± 12 | | ± 42 | ± 0.8 | 108 | 5 | 33* | | 78 | | |
| SH01D1215A | ± 15 | | ± 33 | ± 0.7 | 104 | 5 | 79 | | | | |
| SH01S1512A | 15 (13.5 ~ 16.5) | | 12 | 84 | 1.5 | 86 | 14 | | 5 | 33 | 78 |
| SH01S1515A | | | 15 | 67 | 1 | 86 | | | 5 | | 78 |
| SH01S2403A | | 3.3 | 300 | 6 | 58 | 8 | | 8 | 33 | | 72 |
| SH01S2405A | | 5 | 200 | 4 | 54 | | | 8 | | 78 | |
| SH01S2409A | | 9 | 110 | 2 | 54 | | | 8 | | 77 | |
| SH01S2412A | | 12 | 84 | 1.5 | 55 | | | 5 | | 77 | |
| SH01S2415A | 15 | 67 | 1 | 53 | 5 | | 79 | | | | |
| SH01D2405A | ± 5 | ± 100 | ± 2 | 57 | 8 | | 73 | | | | |
| SH01D2412A | ± 12 | ± 42 | ± 0.8 | 54 | 9 | 5 | 33* | 78 | | | |
| SH01D2415A | ± 15 | ± 33 | ± 0.7 | 53 | | 5 | 78 | | | | |

* For each output



Input Characteristics

| Parameter | Model | Min. | Typ. | Max. | Unit |
|-----------------------------------|------------------|--------------------|------|------|------|
| Input Voltage Range | 5V Input Models | 4.5 | 5 | 5.5 | VDC |
| | 12V Input Models | 10.8 | 12 | 13.2 | |
| | 15V Input Models | 13.5 | 15 | 16.5 | |
| | 24V Input Models | 21.6 | 24 | 26.4 | |
| Input Surge Voltage (1 sec. max.) | 5V Input Models | -0.7 | --- | 9 | |
| | 12V Input Models | -0.7 | --- | 18 | |
| | 15V Input Models | -0.7 | --- | 20 | |
| | 24V Input Models | -0.7 | --- | 30 | |
| Reverse Polarity Input Current | All Models | --- | --- | 0.3 | A |
| Input Filter | | Internal Capacitor | | | |
| Internal Power Dissipation | | --- | --- | 450 | mW |

Output Characteristics

| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|--------------------------|-----------------------------|---------------------------|-------|-------|-------------------|
| Output Voltage Balance | Dual Output, Balanced Loads | --- | ±0.1 | ±1.0 | % |
| Line Regulation | For Vin Change of 1% | --- | ±1.2 | ±1.5 | % |
| Load Regulation | Io=20% to 100% | See Model Selection Guide | | | |
| Ripple & Noise (20MHz) | | --- | 60 | 120 | mV _{P-P} |
| Ripple & Noise (20MHz) | Over Line, Load & Temp. | --- | --- | 150 | mV _{P-P} |
| Ripple & Noise (20MHz) | | --- | --- | 15 | mV rms |
| Temperature Coefficient | | --- | ±0.01 | ±0.02 | %/°C |
| Short Circuit Protection | | 0.5 Second Max. | | | |

General Characteristics

| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|----------------------------------|---|-----------|------|------|-------|
| I/O Isolation Voltage (rated) | 60 Seconds | 1500 | --- | --- | VDC |
| I/O Isolation Resistance | 500 VDC | 1000 | --- | --- | MΩ |
| I/O Isolation Capacitance | 100KHz, 1V | --- | 40 | 100 | pF |
| Switching Frequency | | 50 | 100 | 140 | KHz |
| MTBF (calculated) | MIL-HDBK-217F@25°C, Ground Benign | 2,000,000 | --- | --- | Hours |
| Safety Approvals | UL/cUL 62368-1, UL/cUL 60950-1 recognition(CSA certificate) | | | | |
| Moisture Sensitivity Level (MSL) | IPC/JEDEC J-STD-020D | Level 2 | | | |


Recommended Input Fuse

| 5V Input Models | 12V Input Models | 15V Input Models | 24V Input Models |
|----------------------|----------------------|----------------------|----------------------|
| 500mA Slow-Blow Type | 200mA Slow-Blow Type | 150mA Slow-Blow Type | 100mA Slow-Blow Type |


Environmental Specifications

| Parameter | Conditions | Min. | Max. | Unit |
|---|---------------------|------|------|----------|
| Operating Temperature Range (with Derating) | Ambient | -40 | +85 | °C |
| Case Temperature | | --- | +90 | °C |
| Storage Temperature Range | | -50 | +125 | °C |
| Humidity (non condensing) | | --- | 95 | % rel. H |
| Cooling | Free-Air convection | | | |
| Lead Temperature (1.5mm from case for 10Sec.) | | --- | 260 | °C |

Output Voltage Tolerance

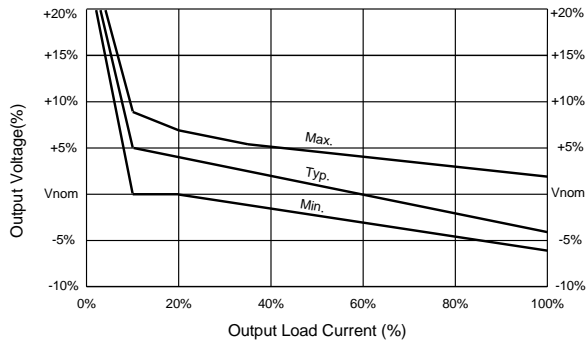


(3.3V & 5V Output)

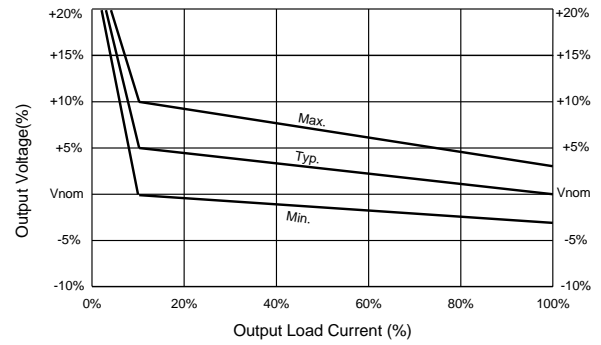

(All other Output)

Power Derating Curve

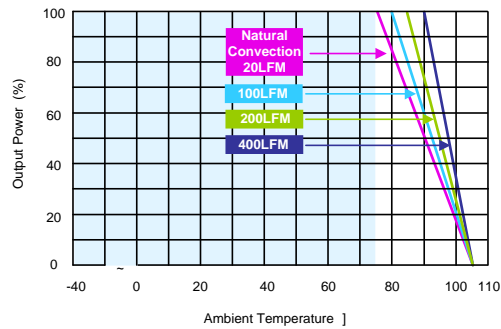


Notes


- 1 Specifications typical at $T_a=+25^{\circ}\text{C}$, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Ripple & Noise measurement bandwidth is 0-20MHz.
- 3 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- 4 All DC/DC converters should be externally fused at the front end for protection.
- 5 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 6 Specifications subject to change without notice.
- 7 It is not recommended to use water-washing process on SMT units.

Mechanical Drawing


Mechanical Dimensions (Single Output)

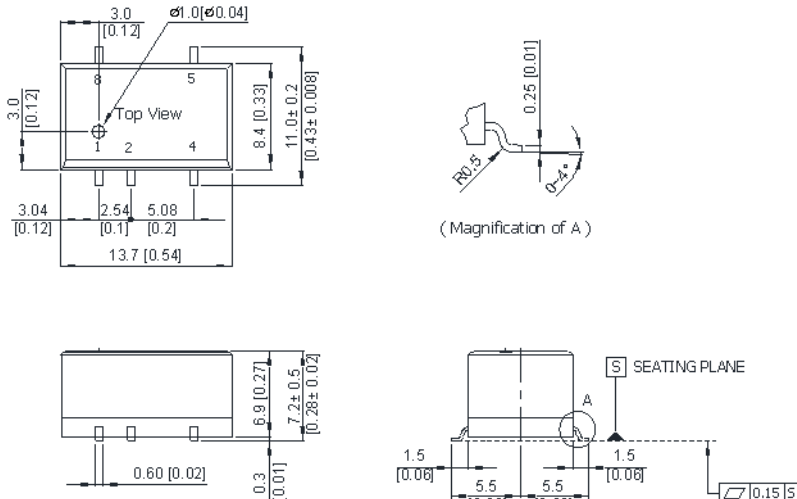


Connecting Pin Patterns

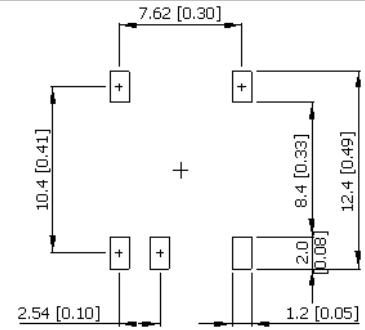

Mechanical Dimensions (Dual Output)

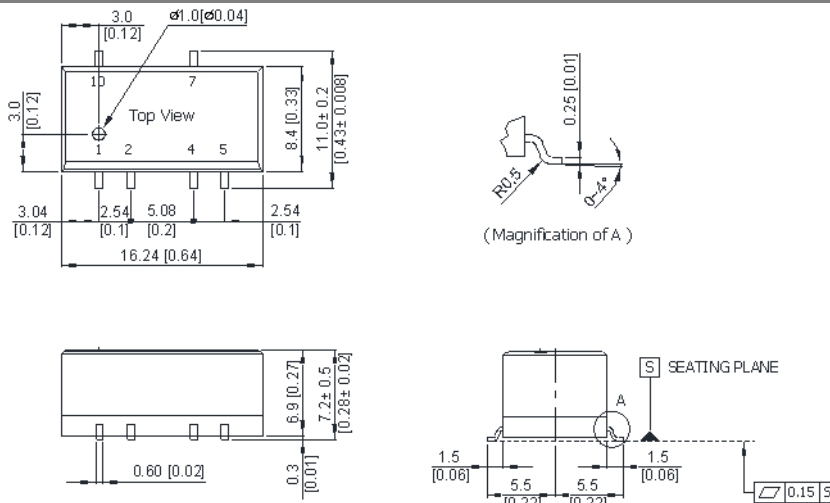

Connecting Pin Patterns

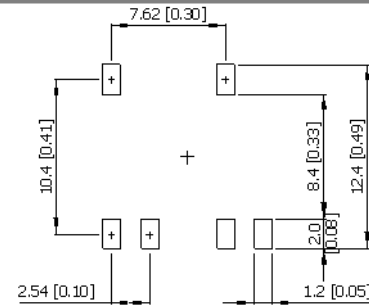

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.25 (X.XX±0.01)
X.XX±0.13 (X.XXX±0.005)
- ▶ Pins ±0.05 (±0.002)

Pin Connections

| Pin | Single Output | Dual Output |
|-----|---------------|-------------|
| 1 | -Vin | -Vin |
| 2 | +Vin | +Vin |
| 3 | No Pin | No Pin |
| 4 | -Vout | Common |
| 5 | +Vout | -Vout |
| 6 | No Pin | No Pin |
| 7 | No Pin | +Vout |
| 8 | NA | No Pin |
| 9 | --- | No Pin |
| 10 | --- | NA |

NA : Not Available for Electrical Connection

Physical Outline

Case Size (Single Output) : 13.7x8.0x6.7mm (0.54x0.31x0.26 Inches)
Output)

Case Size (Dual Output) : 16.24x8.0x6.7mm (0.64x0.31x0.26 Inches)

Case Material : Non-Conductive Black Plastic (flammability to UL 94V-0 rated)

Weight (Single Output) : 1.7g

Weight (Dual Output) : 2.0g



Part Numbering System

| S | H | 01 | S | 05 | 05 | A |
|-------------|---------------|-------|-------------------|---------------|----------------|--------------------|
| Form factor | Family series | Watt | Number of Outputs | Input Voltage | Output Voltage | Option Code |
| D-DIP | A-Z | 01:1W | S - Single | 03:3.3V | 03:3.3V | A - Std. Functions |
| P-SIP | | 02:2W | D- Dual | 05: 5V | 05: 5V | |
| S-SMD | | 03:3W | | 12:12V | 12:12V | |
| | | 04:4W | | 24: 24V | 15: 15V | |
| | | 06:6W | | 48:48V | 24: 24V | |



WARRANTY

Delta offers a three(3) years limited warranty. Complete warranty information is listed on our web site or is available upon request from Delta.

Information furnished by Delta is believed to be accurate and reliable. However, no responsibility is assumed by Delta for its use, nor for any infringements of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Delta. Delta reserves the right to revise these specifications at any time, without notice.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View SH01D0505A on WIN SOURCE](#)
-  [Delta Electronics Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management