






**THE DATASHEET OF
SMTV01-Y35**

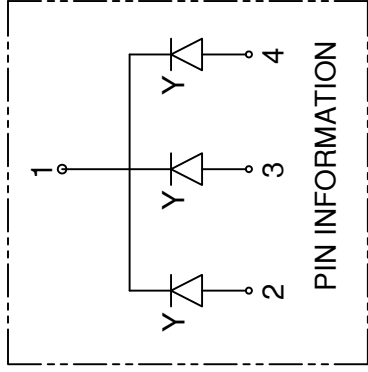

REV.	
B	Engineering Release
C	Revised Side View, S
D	Corrected Typo in Re

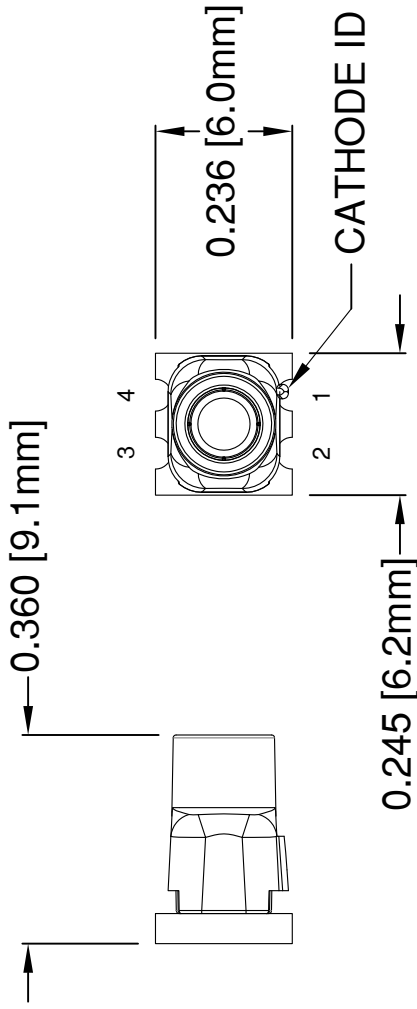

RECOMMENDED S

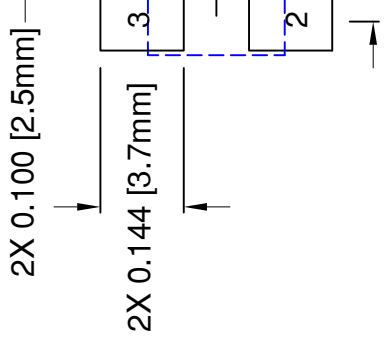

ABSOLUTE MAXIMUM RATINGS at Ta=25°C	
REVERSE VOLTAGE	5V
REVERSE CURRENT	100µA
OPERATING TEMPERATURE RANGE	-35°C - 85°C
STORAGE TEMPERATURE	-35°C - 85°C
MAX SOLDERING TEMPERATURE	260°C FOR 3 SECONDS


STANDARD TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
DECIMALS	ANGLES
.X ±.1	X°
.XX ±.02	
.XXX ±.010	
DESIGNED BY:	DATE:
A. Wright	03/11
CHECKED BY:	DATE:
B. Oliver	03/11

- NOTES:
- DERATING OF FORWARD CURRENT PER SEGMENT, 0.30mA/°C at T ≥ 25°C
 - ACCEPTS BIVAR FLEXIBLE LIGHT PIPE STYLE FLPS2031

REV.	SEE SHEET #1

Part Number	Chip			Absolute Maximum Ratings Per Segment			Elect @ V [V] TY
	Emitted Color	λ_D [nm]		P_d [mW]	I_f [mA]	Peak I_f [mA]	
		MIN	TYP				
SMTV01-Y19	YELLOW	-	589	-	65	25	100
SMTV01-Y27		-	589	-	65	25	100
SMTV01-Y35		-	589	-	65	25	100


Note: 10% Duty Cycle, Pulse Width ≤ 0.1 msec for Peak I_f .

STANDARD TOLERANCES (UNLESS OTHERWISE SPECIFIED)	
DECIMALS	ANGLES
.X $\pm .1$	X°
.XX $\pm .02$	
.XXX $\pm .010$	DATE: 03/1
DESIGNED: A. Wright	CHECKED: B. Oliver
DATE: 03/1	DATE: 03/1

REV.

SEE SHEET #1

Recommended Reflow Soldering Profile

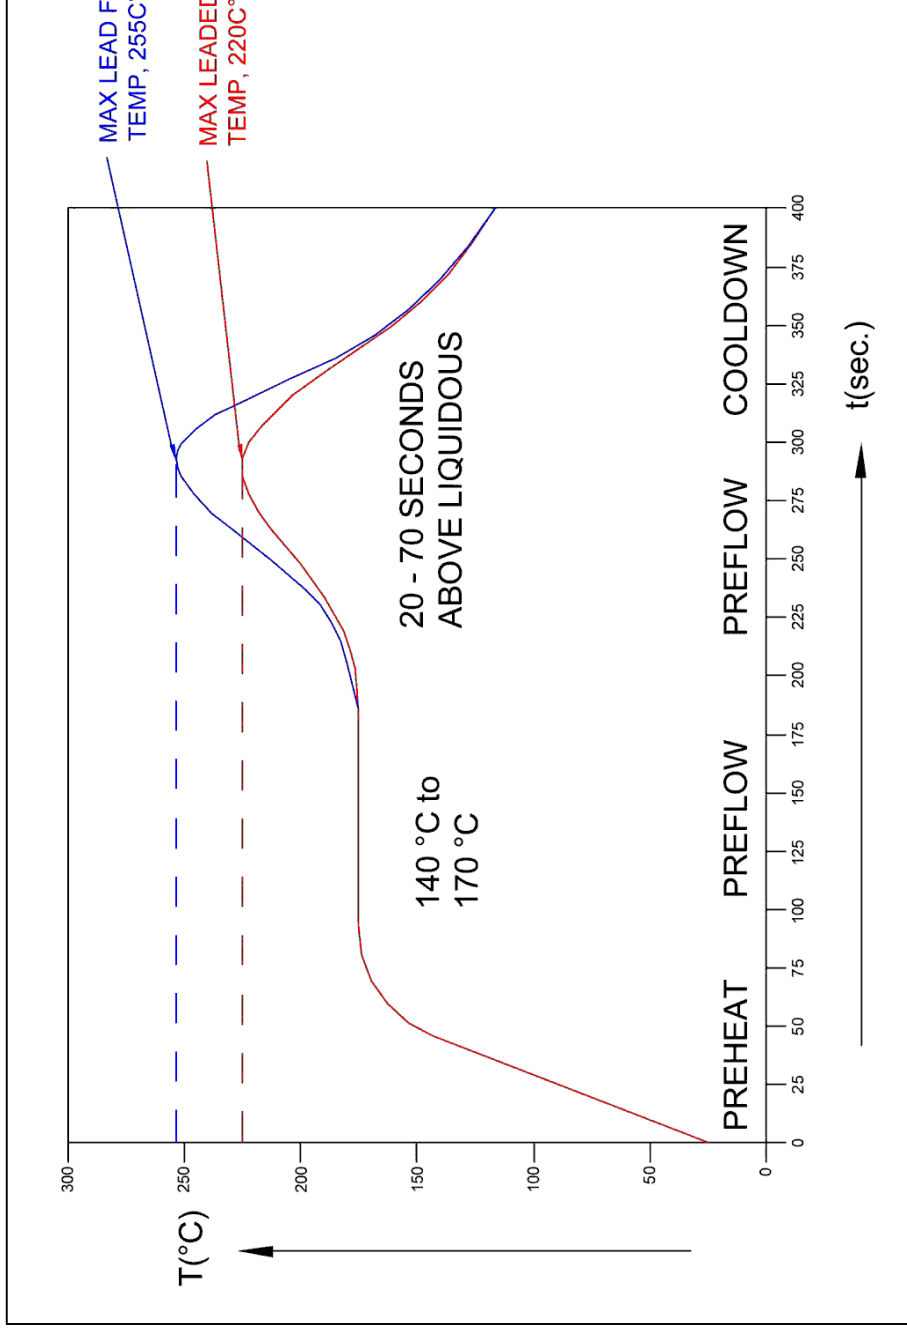

STANDARD TOLERAN (UNLESS OTHERWISE SPECI		ANGU	X°
DECIMALS	.X	±.1	
	.XX	±.02	
	.XXX	±.010	
DESIGNED:	A. Wright	DATE:	03/1
CHECKED:	B. Oliver	DATE:	03/1

NOTE:
1. Do not clean after soldering. Only use no-clean solder paste.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SMTV01-Y35 on WIN SOURCE](#)

 [Bivar Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management