





# THE DATASHEET OF SMFLPO-6.0



NOTES:

1. ALLOWABLE FLEXIBLE LIGHT PIPE CUT LENGTH AVAILABLE IN INCREMENTS OF 0.05".
2. MINIMUM BEND RADIUS OF FLEXIBLE LIGHT PIPE: 0.87" [22mm].
3. COMPONENTS SHIPPED NON-ASSEMBLED.
4. MINIMUM 0.210" FIBER INSERTION INTO SMFLP.

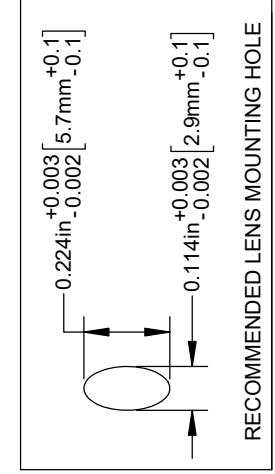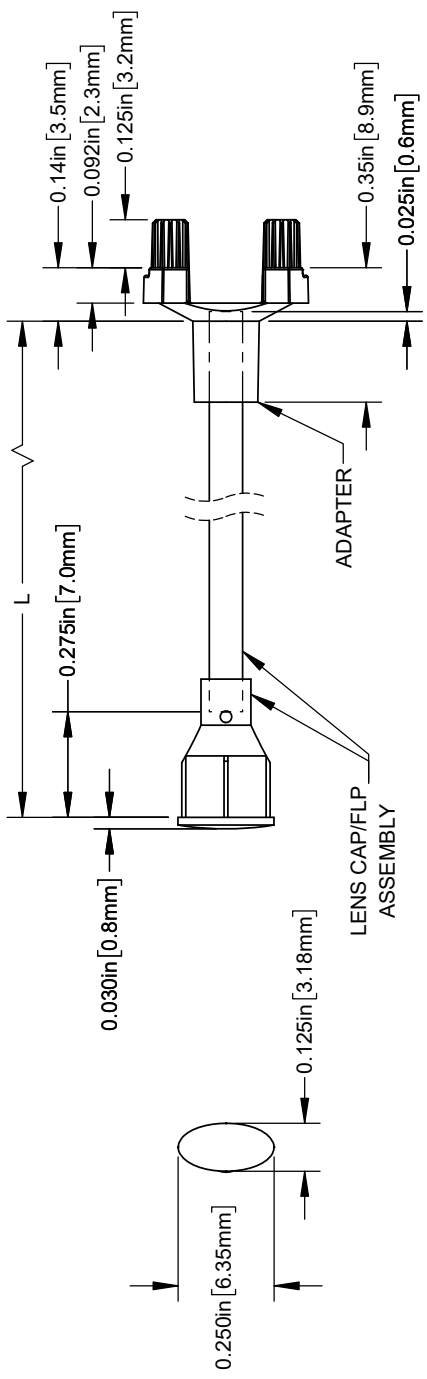


RECOMMENDED LENS MOUNTING HOLE

TABLE 1 - LENGTH	
LENGTH (L)*	TOLERANCE
1.00" - 16.00"	±0.05"
16.1" - 40.00"	±0.15"
40.1" - 80.00"	±0.30"
80.1" - 3,940.00"	±0.5%

\*AVAILABLE IN 0.1" INCREMENTS

0.15  
 2X  $\varnothing$  0.100in  $_{-0.005}^{+0.000}$  [2.54mm]  $_{-0.005}^{+0.000}$   
 LED MOUNTING  
 RECOMMENDED  
 & MOUNTING

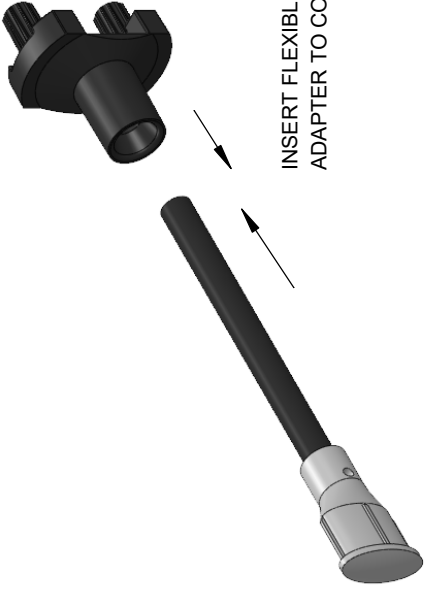

INSERT FLEXIBLE LIGHT PIPE INTO  
 ADAPTER TO COMPLETE ASSEMBLY

**CUSTOMER**

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)	
DECIMALS	ANGULAR
X ±.1	X° ±1°
.XX ±.02	
.XXX ±.010	

DESIGNED:	DATE:
R. PAJE	6/16/2005
REVISED:	DATE:
K. BARON	5/13/2022
CHECKED:	DATE:
A. VALDEZ	5/13/2022

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SMFLPO-6.0 on WIN SOURCE](#)

 [Bivar Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management