





THE DATASHEET OF SMFLPO-3.0



NOTES:


1. ALLOWABLE FLEXIBLE LIGHT PIPE CUT LENGTH AVAILABLE IN INCREMENTS OF 0.05".
2. MINIMUM BEND RADIUS OF FLEXIBLE LIGHT PIPE: 0.87" [22mm].
3. COMPONENTS SHIPPED NON-ASSEMBLED.
4. MINIMUM 0.210" FIBER INSERTION INTO SMFLP.

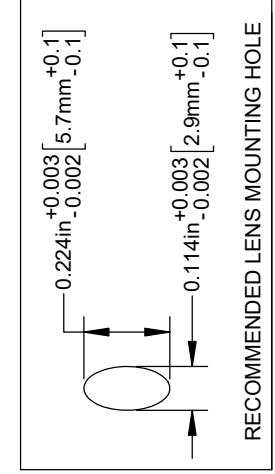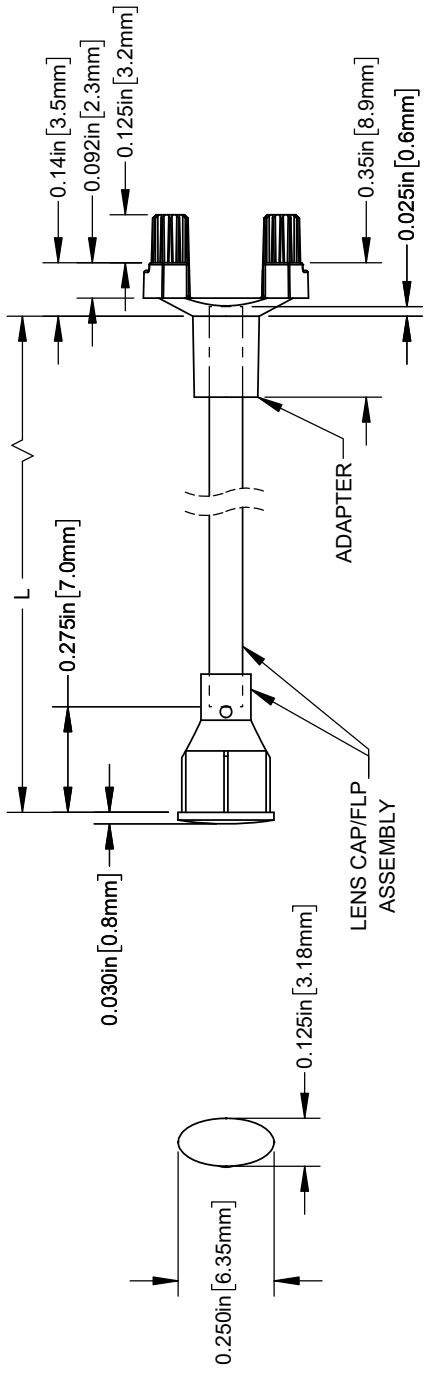

RECOMMENDED LENS MOUNTING HOLE

TABLE 1 - LENGTH	
LENGTH (L)*	TOLERANCE
1.00" - 16.00"	±0.05"
16.1" - 40.00"	±0.15"
40.1" - 80.00"	±0.30"
80.1" - 3,940.00"	±0.5%

*AVAILABLE IN 0.1" INCREMENTS

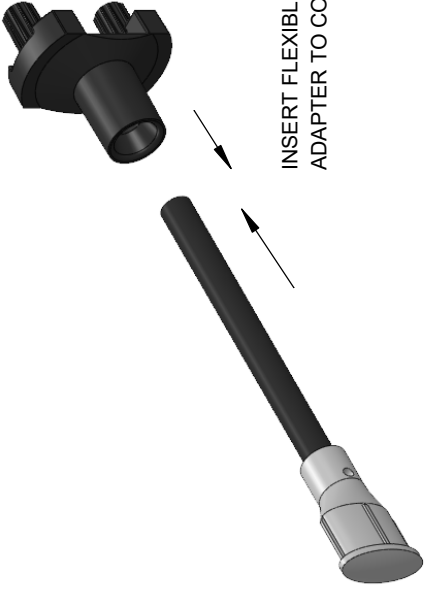

INSERT FLEXIBLE LIGHT PIPE INTO ADAPTER TO COMPLETE ASSEMBLY

REV.	DESCR
A	Engineering Release
B	Updated Fiber To FLPS In
C	ECO-1241: Updated Reco

0.15
2X \varnothing 0.100in $^{+0.000}_{-0.005}$ [2.54mm]

LED MOUNTING

RECOMMENDED
& MOUNTING

CUSTOMER

STANDARD TOLERANCE

(UNLESS OTHERWISE SPECIFIED)

DECIMALS ANGULAR

X ±.1 X° ±1°

.XX ±.02

.XXX ±.010


DESIGNED: R. PAJE DATE: 6/16/2005

REVISOR: K. BARON DATE: 5/13/2022

CHECKED: A. VALDEZ DATE: 5/13/2022

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SMFLPO-3.0 on WIN SOURCE](#)

 [Bivar Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management