




**THE DATASHEET OF  
SSP-M16MW012C05**




PART NUMBER

SSP-M16MW012C05

REV. ---

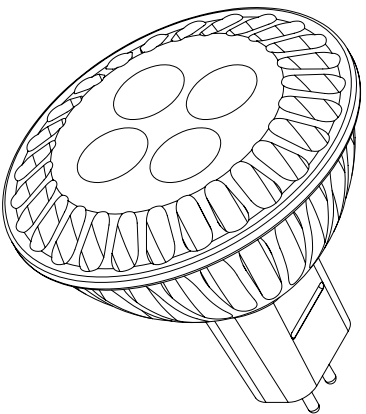

ø50.00 [ø1.969]



ELECTRO-OPTICAL CHARACTERISTICS T <sub>a</sub> =25°C				V <sub>i</sub> =12V AC/DC	
PARAMETER	MIN	TYP	MAX	UNITS	
INPUT VOLTAGE		12		V AC/DC	
ENERGY USED		5		W	
TOTAL LUMENS		315		LUMENS	
VIEW ANGLE		24		2x beam	
COLOR TEMPERATURE		3000		K	
COLOR RENDERING INDEX (CRI)		80		40	
OPERATING TEMPERATURE		-20		°C	
LIFE HOURS		25000		HRS	
EMITTED COLOR:		WHITE			
LENS FINISH:		WATER CLEAR			

X±1 (+0.039), X-X±0.5 (+0.020), X-XX±0.25 (+0.010), X-XXX±0.127 (+0.005), LEAD SIZE=±0.05 (+0.002), LEAD LENGTH=±0.75 (+0.030), MIN= +DECIMAL PRECISION MAX.= +0.00  
 -DECIMAL PRECISION

HELEN ROAD  
 E. I. L 60067-6976  
 +1.847.359.2790  
 1.847.359.6538  
 WWW.LUMEX.COM

LED MR16, 3000K, 12V, AC/DC, 24°, 5W CRI>80.

\*\*THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT\*\*

CONFIDENTIAL INFORMATION  
 THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL  
 KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

UNCONTROLLED DOCUMENT

DATE:	12.02.11	DRAWN BY:	AB
PAGE:	1 OF 1	CHKD BY:	JD
SCALE:	NTS	APRVD BY:	DT
UNIT:	mm [INCH]		

Ⓢ

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View SSP-M16MW012C05 on WIN SOURCE](#)
- ⊖ [Lumex Opto/Components Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management