





**THE DATASHEET OF
SSF-LXH306SGD-TR**



PART NUMBER	SSF-LXH306SGD-TR		REV.	B
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.	A
10.01.07	E.C.N. #11447.		REV.	A
08.19.11	E.C.N. #11744/10BRDR. & REDRAWN.		REV.	B

ELECTRO-OPTICAL CHARACTERISTICS $I_A=25^\circ\text{C}$ $I_f=20\text{mA}$

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH	565		2.6	nm	
FORWARD VOLTAGE	2.2			V_f	$I_f=100\mu\text{A}$
REVERSE VOLTAGE	5.0			V_r	$I_f=20\text{mA}$
AXIAL INTENSITY	80			med	
VIEWING ANGLE	60			2λ theo	
EMITTED COLOR:	GREEN				
EPOXY LENS FINISH:	GREEN DIFFUSED				

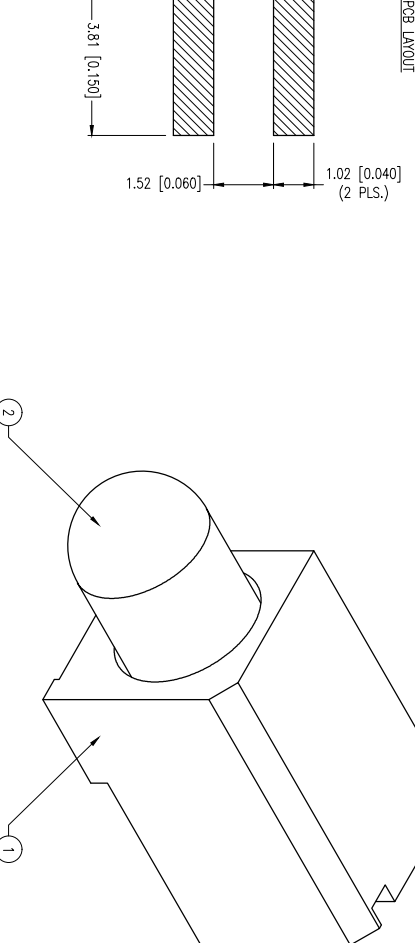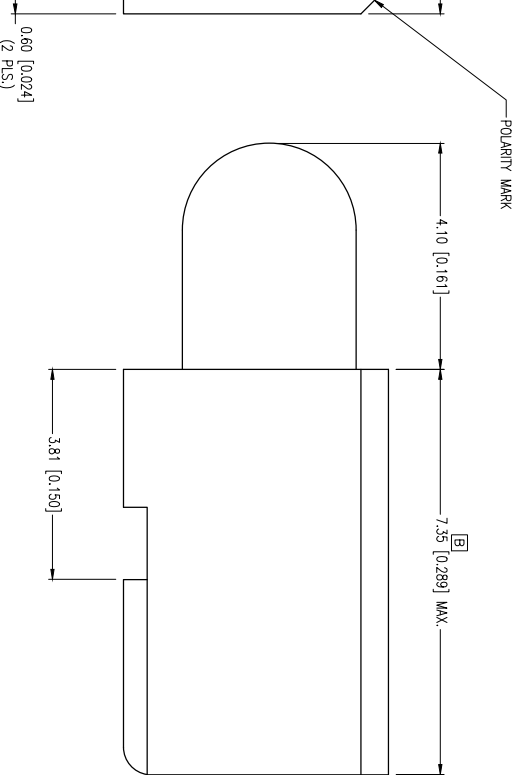

LIMITS OF SAFE OPERATION AT 25°C PER CHIP

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	-1.6	mW/°C
OPERATING TEMP.	-40 TO +85	°C
STORAGE TEMP.	-40 TO +85	°C
SOLDERING TEMP.	+230	°C
2.0mm FROM BODY	3	SEC. MAX.

* <10µs

NOTES:



1. SSH-LXH306 HOLDER, BLACK NYLON.
2. SSL-LX308F45SD LED.
3. LVF-CARRIER-56.
4. 1,000 PCS. PER REEL.

±11 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005), LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN= ±0.00

UNCONTROLLED DOCUMENT

56ARY AVE STREAM, IL 60188 630-315-2150 WWW.LUMEX.COM	T-3mm LED, RIGHT ANGLE SURFACE MOUNT, 565nm SUPER GREEN, GREEN DIFFUSED.	DATE: 08.19.11	DRAWN BY: AB
CONFIDENTIAL INFORMATION CONDENSED INFORMATION ***THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT**	THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.	PAGE: 1 OF 2	CHKD BY: --
		SCALE: NTS	APRD BY: --
		UNIT: mm [INCH]	(P)

PART NUMBER	SSF-LXH306SGD-TR		REV.	B
DATE	E.C.N. NUMBER AND REVISION COMMENTS			
10.01.07	E.C.N. #11447.		REV.	A
08.19.11	E.C.N. #11744/10BRDR. & REDRAWN.		REV.	B

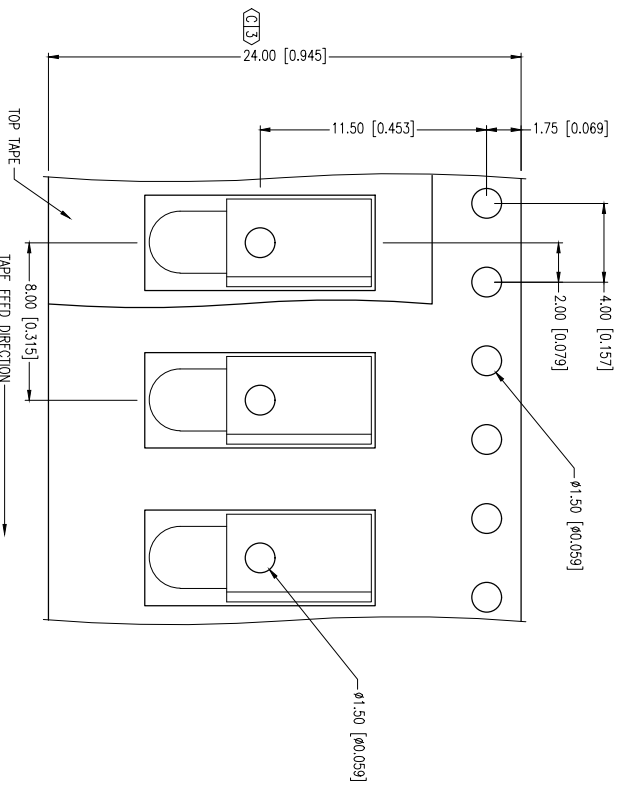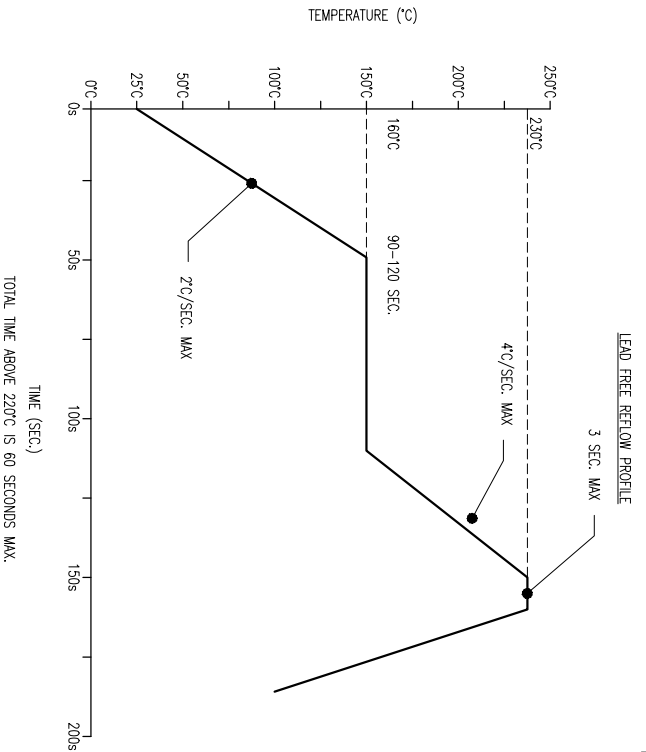

±0.1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005), LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN=±0.00
 SARY AVE
 STREAM, IL 60188
 630-315-2150
 630-315-2151
 WWW.LUMEX.COM

T-3mm LED, RIGHT ANGLE SURFACE MOUNT, 565nm SUPER GREEN, GREEN DIFFUSED.

CONFIDENTIAL INFORMATION
 THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

***THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT**

PRECISION MAX = ±0.00
 PRECISION MIN = ±0.00

UNCONTROLLED DOCUMENT

DATE:	08.19.11	DRAWN BY:	AB
PAGE:	2 OF 2	CHKD BY:	--
SCALE:	NTS	APRVD BY:	--
UNIT:	mm [INCH]		

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View SSF-LXH306SGD-TR on WIN SOURCE](#)
- ⊖ [Lumex Opto/Components Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management